

## SUBMITTAL DATA

MULTI18HP230V1EO  
18000 BTU/H Multi-Zone Heat Pump System

Job Name

Location

Date

Purchaser

Engineer

Submitted to

For

Unit Designation

Schedule No.



MULTI18HP230V1EO

### GENERAL FEATURES

- AHRI Certificate: 210278973 (Non-Ducted)  
210278974 (Ducted)  
210278983 (Mixed)
- High Efficiency DC Inverter Technology
- Compact and Quiet Design
- Auto Restart on Power Outages
- Multi-point Diagnostics
- Wi-Fi Included (Factory Installed)
- Low Ambient Cooling down to -20°F (Range -22°F to 118°F)
- Low Ambient Heating down to -22°F (Range -22°F to 75°F)
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested

## SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

SPECIFICATIONS		MULTI18HP230V1EO	
System Type	HEAT PUMP		
Number of Zones	2		
SYSTEM PERFORMANCE		NON-DUCTED INDOOR UNITS	
Cooling	Min - Max	Btu/h	7000 - 19600
	Capacity @95°F	Btu/h	17000
Heating	Min - Max	Btu/h	7000 - 19600
	Capacity @5°F	Btu/h	13600
	Capacity @17°F	Btu/h	14700
	Capacity @47°F	W	18000
SEER2	21		
EER2	12		
HSPF2	10		
COP @5°F	2.2		
COP @47°F	3.8		
SYSTEM PERFORMANCE		DUCTED INDOOR UNITS	
Cooling	Min - Max	Btu/h	7000 - 19600
	Capacity @95°F	Btu/h	17000
Heating	Min - Max	Btu/h	7000 - 19600
	Capacity @5°F	Btu/h	14000
	Capacity @17°F	Btu/h	14000
	Capacity @47°F	W	18000
SEER2	16		
EER2	11		
HSPF2	8		
COP @5°F			
COP @47°F	3.3		
SYSTEM PERFORMANCE		MIXED DUCTED AND NON-DUCTED INDOOR UNITS	
Cooling	Min - Max	Btu/h	7000 - 19600
	Capacity @95°F	Btu/h	17000
Heating	Min - Max	Btu/h	7000 - 19600
	Capacity @5°F	Btu/h	
	Capacity @17°F	Btu/h	
	Capacity @47°F	W	18000
SEER2	18.5		
EER2	11.5		
HSPF2	9		
COP @5°F			
COP @47°F	3.6		
OUTDOOR UNIT		MULTI18HP230V1EO	
Cooling Temperature Range	°F	-20 - 122	
Heating Temperature Range	°F	-22 - 86	
Refrigerant Type	R410A		
Compressor Type	GREE G-10 / 2 - STAGE INVERTER		
Sound Pressure Level	dB(A)	53	
External Dimensions (W x H x D)	in	32 3/8 x 21 11/16 x 13 7/8	
Package Dimension (W x H x D)	in	34-3/8 x 24-7/16 x 15-11/16	
Net Weight	lbs	77.2	
Gross Weight	lbs	82.7	

REFRIGERANT PIPING		
Refrigerant Charge - R410A	oz	45.9
Additional Charge	oz/ft	0.2
Port Size (Liquid - Gas)	port A (in)	1/4 - 3/8
	port B (in)	1/4 - 3/8
	port C (in)	
	port D (in)	
	port E (in)	
Pre-Charge Length	ft	33
Pipe Length (Min - Max)	ft	10 - 131
Pipe Length to furthest Indoor Unit	ft	66
Max. Pipe Elevation	ft	49
ELECTRICAL		
Power Supply	208-230V / 1Ph / 60Hz	
Voltage Range (Min - Max)	VAC	187 - 253
Rated Current - Cooling	A	10
Rated Current - Heating	A	10
MCA	A	15
MOCP	A	20
Suggested Breaker Size	A	15
Main Power Wire Size	AWG	Per Local Code
Interconnecting Wire Size	AWG	14 / 4

FEATURES & FUNCTIONS SUMMARY	MULTI18HP230V1EO
SYSTEM FEATURES	
Inverter Type	G10
Ultra Low Frequency Torque Control	Yes
Power Factor Correction	Yes
Compressor Type - Inverter	High Efficiency Rotary
Basepan With Electric Heater	Yes
Indoor & Outdoor Fin Coating (Blue Fin)	Yes
Intelligent Defrosting	Yes
Intelligent Preheating	Yes
Low Voltage Startup	Yes
Memory/Power Failure Recovery	Yes
Self Diagnosis	Yes

## DIMENSIONS


### OUTDOOR UNIT

Unit: inch

MULTI18HP230V1EO

#### DIMENSIONS



A	29-21/64
B	32-3/8
C	21-11/16
D	11-13/16
E	13-7/8
F	20-5/32
G	13-5/64

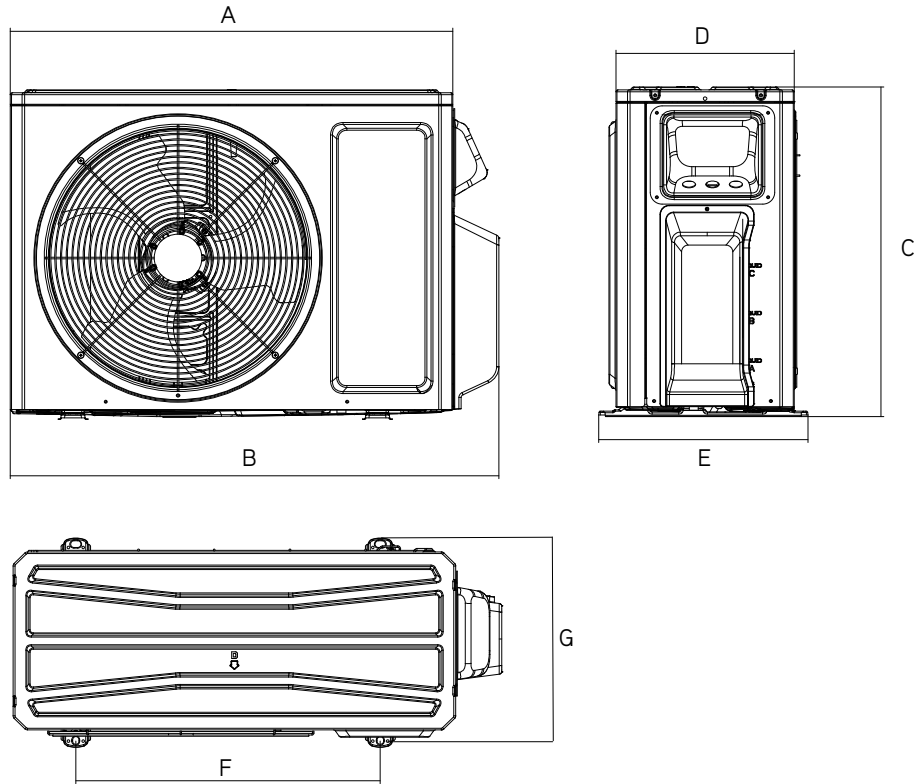

## CLEARANCES

### OUTDOOR UNIT

Minimum clearance

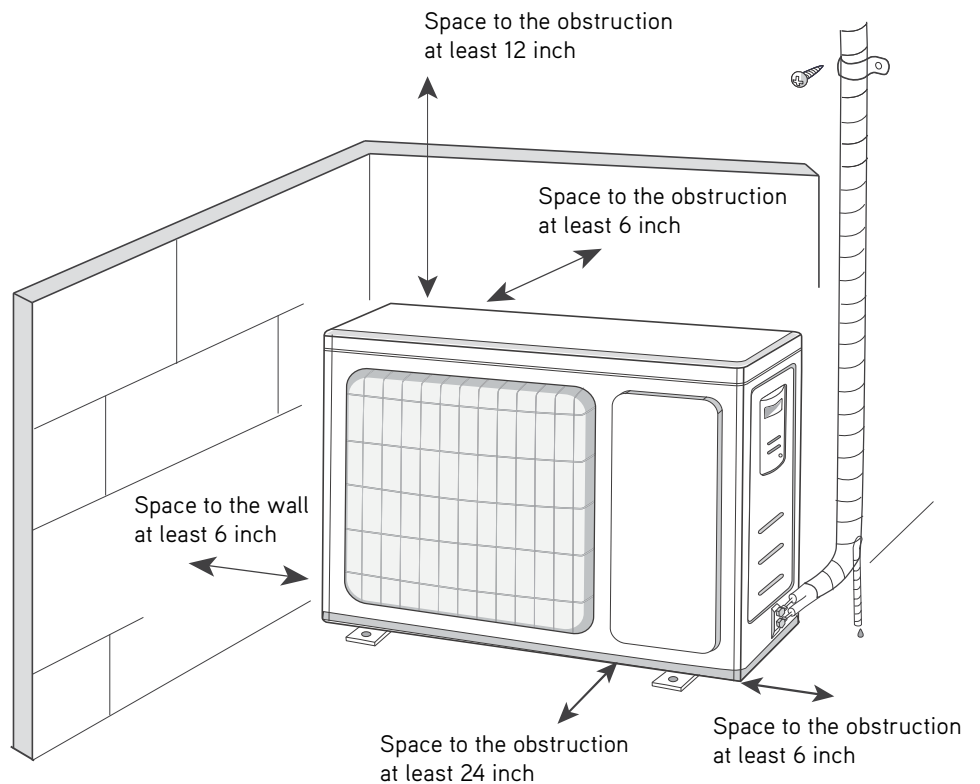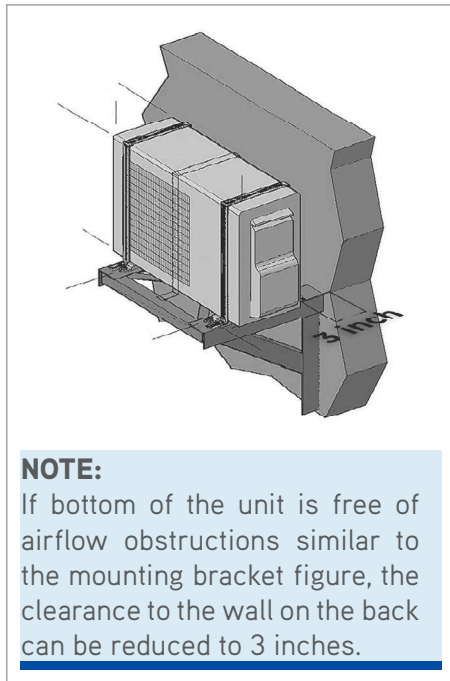

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

[GREECOMFORT.COM/SYSTEM-DOCUMENTATION](http://GREECOMFORT.COM/SYSTEM-DOCUMENTATION)