

Smart Choice[®]

Electric Dryer Cord Installation Kit


BEFORE BEGINNING INSTALLATION, READ ALL MANUFACTURER'S INSTALLATION INSTRUCTIONS THOROUGHLY.

⚠ DANGER


FIRE AND ELECTROCUTION HAZARD

INSTALLATION AND SERVICE MUST BE PERFORMED BY A QUALIFIED INSTALLER. THESE INSTRUCTIONS ARE INTENDED FOR PROFESSIONAL INSTALLATION ONLY. IF YOU DO NOT POSSESS THE NECESSARY QUALIFICATIONS AND CERTIFICATION, DO NOT ATTEMPT THE INSTALLATION YOURSELF!

This Kit Includes:



3-Wire 30-Amp
Dryer Electrical
Cord




4-Wire 30-Amp
Dryer Electrical
Cord


smart
CHOICE[®]

INSTALLATION INSTRUCTIONS - DRYER CORD

Electrical Connection (non-Canada) – 3-wire cord



3-wire receptacle
(NEMA type 10-30R)

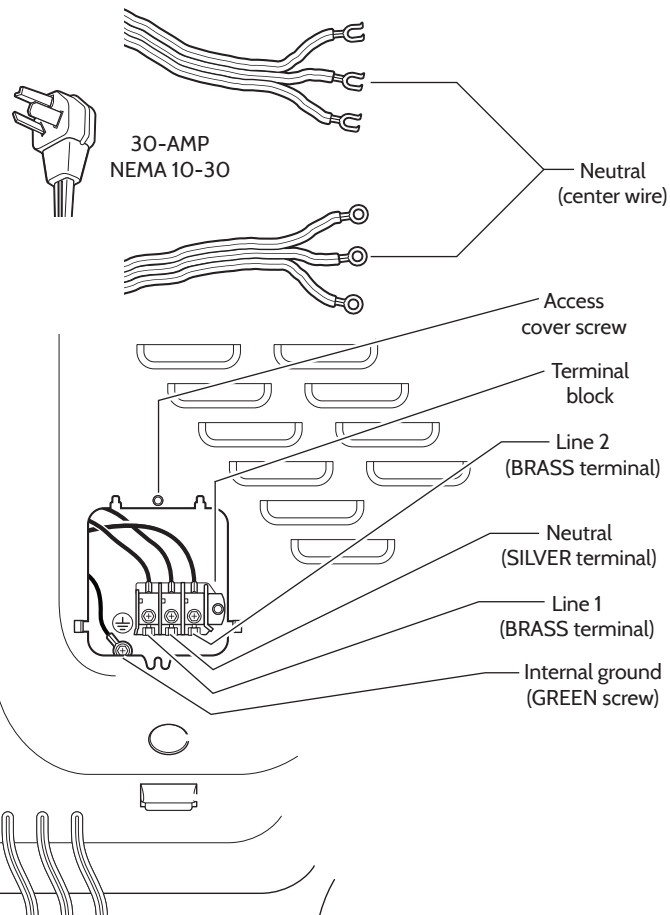

⚠ WARNING

ELECTRICAL SHOCK HAZARD

Failure to disconnect power source before servicing could result in personal injury or even death.

1. Turn off power supply to outlet.
2. Remove the screw securing the terminal block access cover in the lower corner on the back of the dryer.
3. Install a UL-approved strain relief according to the power cord/strain relief manufacturer's instructions in the power cord entry hole below the access panel. At this time, the strain relief should be loosely in place.
4. Thread an UNPLUGGED, UL-approved, 30-amp power cord, NEMA 10-30 type SRDT through the strain relief.
5. Attach the power cord neutral (center wire) conductor to the SILVER-colored center terminal on the terminal block. Tighten the screw securely.
6. Attach the remaining two power cord outer conductors to the outer BRASS-colored terminals on the terminal block. Tighten both screws securely.

⚠ WARNING

ELECTRICAL SHOCK HAZARD

Do not make a sharp bend or crimp wiring/conductor at connections.


7. Follow manufacturer's guidelines for firmly securing the strain relief and power cord, and complete the continuity check.
8. Reinstall the terminal block cover.

➡ IMPORTANT

If moving dryer from a 4-wire system and installing it in a 3-wire system, move the internal ground from the center terminal back to the GREEN screw next to the terminal block.


📌 NOTE

If a terminal screw falls during cord installation, it can be retrieved in the terminal screw recovery slot below the access panel (if provided).

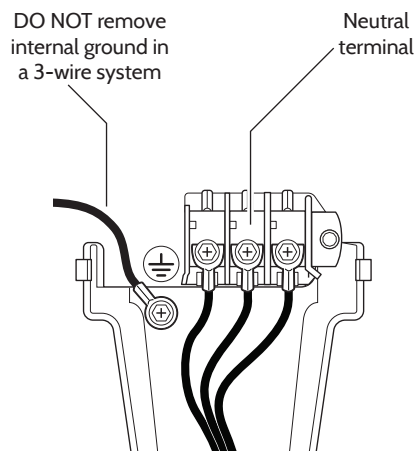


INSTALLATION INSTRUCTIONS - DRYER CORD

Electrical Connection (non-Canada) - 4-wire cord



4-wire receptacle
(NEMA type 14-30R)

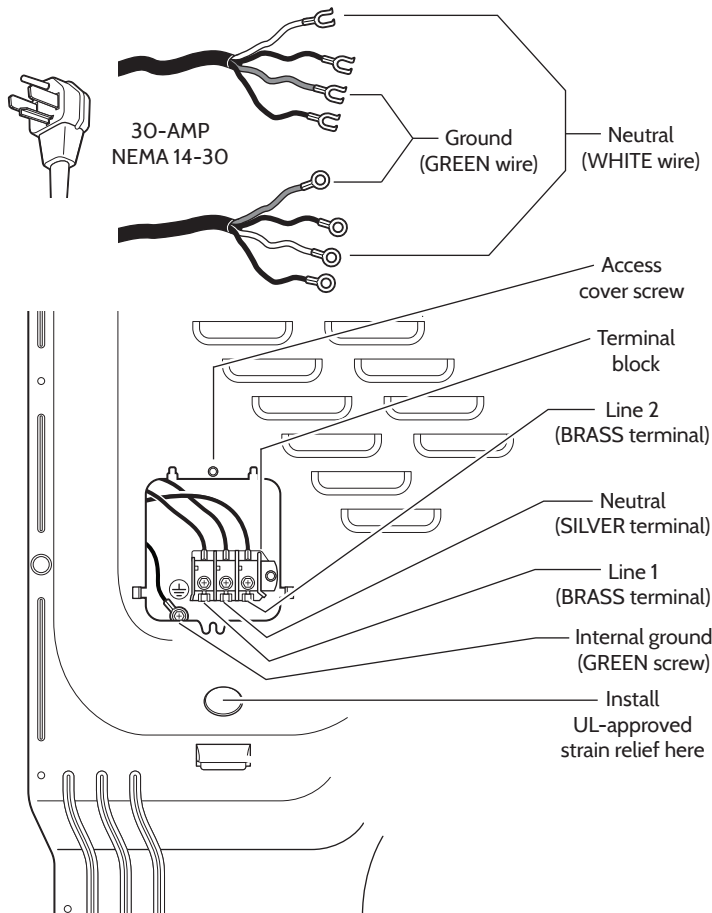

⚠ WARNING

ELECTRICAL SHOCK HAZARD

Failure to disconnect power source before servicing could result in personal injury or even death.

1. Turn off power supply to outlet.
2. Remove the screw securing the terminal block access cover in the lower corner on the back of the dryer.
3. Install a UL-approved strain relief according to the power cord/strain relief manufacturer's instructions in the power cord entry hole below the access panel. At this time, the strain relief should be loosely in place.
4. Thread an UNPLUGGED, UL-approved, 30-amp power cord, NEMA 14-30 type ST or SRDT through the strain relief.
5. Disconnect the internal (WHITE) dryer harness ground wire from the (GREEN) ground screw next to the terminal block.
6. Attach the ground (GREEN) power cord wire to the cabinet with the ground (GREEN) screw. Tighten the screw securely.
7. Move the internal dryer harness ground (WHITE) wire to the terminal block and attach it along with the neutral (WHITE) power cord wire conductor to the center SILVER-colored terminal on the terminal block. Tighten the screw securely.
8. Attach the RED and BLACK power cord conductors to the outer BRASS-colored terminals on the terminal block. Tighten both screws securely.

📌 NOTE

If a terminal screw falls during cord installation, it can be retrieved in the terminal screw recovery slot below the access panel (if provided).

⚠ WARNING

ELECTRICAL SHOCK HAZARD

Do not make a sharp bend or crimp wiring/conductor at connections.

9. Follow manufacturer's guidelines for firmly securing the strain relief and power cord, and complete the continuity check.
10. Reinstall the terminal block cover.

