

### GENERAL

Highest quality sink seamlessly formed of #18 gauge, type 304 (18-8) nickel bearing stainless steel with **Perfect Drain**. Top Mount.

#### **DESIGN FEATURES**

Bowl Depths: See chart on next page. Coved Corners: 1-3/4" vertical and horizontal radius. Rim Height: 5/32" (4mm) Finish: Exposed surfaces are hand polished to a Lustrous Highlighted Satin finish. Underside: Fully protected by Sound Guard<sup>®</sup> undercoating to reduce condensation and dampen sound.

**Perfect Drain**: Seamlessly welded stainless steel collar eliminates the gap between a traditional drain and the sink for a sanitary and gap free installation. Each sink shipped with two LKPD1 drain kits, or a garbage disposer can be installed on either sink bowl for user convenience. **Patent Pending** 

#### OTHER

Drain opening: 3-3/8" (86mm)

Suffix "L" (left) or "R" (right) denotes location of deep bowl. Waste Fitting complies with ASME A112.18.2/CAN/CSA-B125.2 Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.


#### **OPTIONAL ACCESSORIES**


Bottom Grid: LKWBG1316SS Cutting Board: CB1613, CB1713, CBR1316, CBS1316 Rinsing Basket: LKWRB1316SS, LKWERBSS Utensil Caddy for Rinsing Basket: LKWUCSS



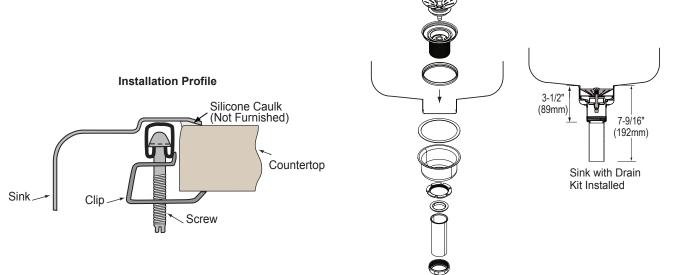

## Gourmet Sink with Perfect Drain<sup>™</sup> Models STLR3322 Series





Model STLR3322RPD4

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.


This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



#### SINK DIMENSIONS\*


Model	Overall				Inside Left Bowl			Inside Right Bowl			Cutout in Countertop (11/2" [38mm] Radius Corners)		No. of 1 <sup>1</sup> /2" (38mm) Dia. Faucet Holes 4" (102mm)	Minimum Cabinet
Number	L	W	Left	Right	L	W	D	L	W	D	L	W	Center	Size
STLR3322LPD	33 (838mm) (	22 559mm)	11-5/8 (295mm)	9-1/8 )(232mm)	13-1/2 (343mm)(	16 406mm)	10-1/8 (257mm)	13-1/2 (343mm)(	16 (406mm	7-5/8 )(194mm)	32 <sup>3/8</sup> (822mm)	21 <sup>3/8</sup> (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)
STLR3322RPD	33 (838mm) (#	22 559mm)	9-1/8 (232mm)	11-5/8 )(295mm)	13-1/2 (343mm)(-	16 406mm)(	7-5/8 (194mm)	13-1/2 (343mm)(	16 406mm	10-1/8 ) (257mm)	32 <sup>3/</sup> 8 (822mm)	21 <sup>3/8</sup> (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)


\*Length is left to right. Width is front to back.

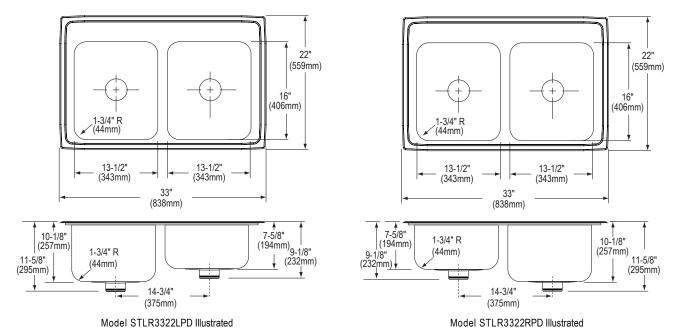

# Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers





In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.