

#### **GENERAL**

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel with Perfect Drain. Undermount.

#### **DESIGN FEATURES**

Bowl Depth: See chart on next page. Coved Corners: 1-3/4" (44mm) vertical and horizontal radius. Finish ELU2115: Exposed surfaces are hand blended to a Lustrous Satin finish.

Finish ELUH2115: Exposed surfaces are hand blended to a Lustrous Highlighted Satin finish.

Underside: Fully protected by Sound Guard<sup>®</sup> undercoating to reduce condensation and dampen sound.

Perfect Drain: Seamlessly welded stainless steel collar eliminates the gap between a traditional drain and the sink for a sanitary and gap free installation. Each sink shipped with one LKPD1 drain kit, or a garbage disposer can be installed for user convenience.

Patent Pending

#### OTHER

Drain opening: 3-3/8" (86mm)

NOTE: All Elkay undermount sinks are designed to affix to the underside of any solid surface countertop.

Waste Fitting complies with ASME A112.18.2/CAN/CSA-B125.2 Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.

#### SINK PACKAGE(S)

MODEL	SINK	<b>BOTTOM GRID</b>	QTY	DRAIN	QTY
ELU2115PDBG	ELU2115PD	LKWOBG2115SS	1	LKPD1	1
ELU211510PDBG	ELU211510PD	LKWOBG2115SS	1	LKPD1	1
ELUH2115PDBG	ELUH2115PD	LKWOBG2115SS	1	LKPD1	1
ELUH211510PDBG	ELUH211510PD	LKWOBG2115SS	1	LKPD1	1


#### **OPTIONAL ACCESSORIES**

Bottom Grid: LKWOBG2115SS Cutting Board (ELUH model only): CB1516 Rinsing Baskets: LKWRB2115SS, LKWERBSS Utensil Caddy for Rinsing Basket: LKWUCSS Mounting Clip: LKUCLIP8



In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkavusa.com for most current version of Elkav product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.





# ELKAY SPECIFIC ATIONS

## Gourmet Undermount Sink with Perfect Drain<sup>™</sup> Model ELU2115 and ELUH2115 Series

### **SINK DIMENSIONS\***

Model	Overall		Inside Bowl		Cutout in	Minimum Cabinet		
Number	L	W	D	L	W	D	Countertop	Size
ELU2115PD	22-1/2 (572mm)	17-1/4 (438mm)	9 (229mm)	21 (533mm)	15-3/4 (400mm)	7-1/2 (191mm)		27 (686mm)
ELU211510PD	22-1/2 (572mm)	17-1/4 (438mm)	11-1/2 (292mm)	21 (533mm)	15-3/4 (400mm)	10 (254mm)		27 (686mm)
ELUH2115PD	23-1/2 (597mm)	18-1/4 (464mm)	9 (229mm)	21 (533mm)	15-3/4 (400mm)	7-1/2 (191mm)	See	27 (686mm)
ELUH211510PD	23-1/2 (597mm)	18-1/4 (464mm)	11-1/2 (292mm)	21 (533mm)	15-3/4 (400mm)	10 (254mm)	Template**	27 (686mm)

5'

(127mm)

1-3/4" R

(44mm)

21"


(533mm)


23-1/2'

(597mm)


\*Length is left to right. Width is front to back.

\*\*Template #74180162 (ELU2115(10)) or #74180250 (ELUH2115(10)) is packed with every sink.







Model ELU2115PD Illustrated




Model ELU211510PD Illustrated





Model ELUH211510PD Illustrated

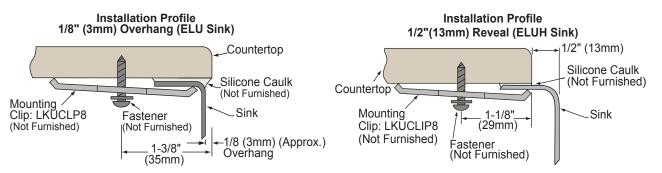

Designed to affix to the underside of any solid surface countertop.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



disposers manufactured by InSinkErator<sup>®</sup> utilizing the

Quick Lock<sup>®</sup> mounting

configuration. Use of non-approved disposers may void Elkay warranty.

InSinkErator, Quick Lock

and the mounting

collar configuration are trademarks of

Emerson Electric Co.

18-1/4"

(464mm)

15-3/4"

(400mm)