#### **GENERAL**

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel. Top mount.

### **DESIGN FEATURES**

LR Bowl Depths: 7-7/8" (200mm) (LR(Q)3321) or 7-5/8" (194mm) (all others).

LRAD Bowl Depths: 4" (102mm), 4-1/2" (114mm), 5" (127mm), 5-1/2" (140mm), 6" (152mm) or 6-1/2" (165mm).

Coved Corners: 1-3/4" (44mm) vertical and horizontal radius. Bowl and Faucet Deck Recess: 3/16" (5mm) below outside edge of sink.

Finish: Exposed surfaces are hand polished to a lustrous highlighted satin finish.

Underside: Fully undercoated to dampen sound and reduce condensation. LR(Q)3321 is fully protected by heavy duty Sound Guard® undercoating.

#### OTHER

LR Series Drain Openings: 3-1/2" (89mm) and centered in bowls as illustrated.

LRAD(Q)2918 Drain Openings: 3-1/2" (89mm) and centered in the bowls.


LRAD(Q)2922, LRAD(Q)3319, LRAD(Q)3321 and LRAD(Q)3722 Drain Openings: 3-1/2" (89mm) and located centered left-to-right and off-center front-to-back in each bowl as illustrated. NOTE: Unless otherwise specified, sink is furnished with 4 faucet

holes as shown. Sink complies with ASME A112.19.3-2008 / CSA B45.4-08





These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.












HOLE DRILLING CONFIGURATIONS

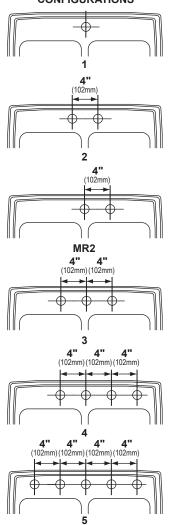

## SEE OTHER SIDE FOR PRODUCT DIMENSIONS.

MADE IN THE USA

THIS PRODUCT, AS CONSTRUCTED IS SUBJECT TO INTERPRETATION OF A.D.A. REQUIREMENTS.
THE UNOBSTRUCTED KNEE SPACE REQUIRED TO SATISFY A.D.A. STANDARDS MAY NOT BE DESIRABLE.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.





# SINK DIMENSIONS\*

	Quick-Clip® r Model Number	Overall		Inside Each Bowl			Cutout in Countertop (1-1/2"				
U-Channel		L A	W B	L C	W D	D E	(38mm) Radius Corners)		No of 1-1/2" (38mm) Faucet	3 1/2" (89mm) Drain Openings (see other side	Minimum Cabinet
Model Number							L	W	Holes	for details)	Size
LR(Q) Series											
LR2519	LRQ2519	25	19-1/2	10	14	7-5/8	24-3/8	18-7/8	1,2,MR2,3,4, or 5	Centered	30
		(635mm)	(495mm)	(254mm)	(356mm)	(194mm)	(619mm)	(479mm)			(762mm)
LR2918	LRQ2918	29	18	12	12	7-5/8	28-3/8	17-3/8	1,2,MR2,3,4, or 5	Centered	33
		(737mm)	(457mm)	(305mm)	(305mm)	(194mm)	(721mm)	(441mm)			(838mm)
LR2922	LRQ2922	29	22	11-1/2	16	7-5/8	28-3/8	21-3/8	1,2,MR2,3,4, or 5	Centered	33
		(737mm)	(559mm)	(292mm)	(406mm)	(194mm)	(721mm)	(543mm)			(838mm)
LR3319	LRQ3319	33	19-1/2	14	14	7-5/8	32-3/8	18-7/8	1,2,MR2,3,4, or 5	Centered	36
		(838mm)	(495mm)	(356mm)	(356mm)	(194mm)	(822mm)	(479mm)			(914mm)
LR3321	LRQ3321	33	21-1/4	13-1/2	16	7-7/8	32-3/8	20-5/8	1,2,MR2,3,4, or 5	Centered	36
		(838mm)	(540mm)	(343mm)	(406mm)	(200mm)	(822mm)	(524mm)			(914mm)
LR3722	LRQ3722	37	22	16	16	7-5/8	36-3/8	21-3/8	1,2,MR2,3,4, or 5	Centered	42
		(940mm)	(559mm)	(406mm)	(406mm)	(194mm)	(924mm)	(543mm)			(1067mm)
LR4322	LRQ4322	43	22	19	16	7-5/8	42-3/8	21-3/8	1,2,MR2,3,4, or 5	Centered	48
		(1092mm)	(559mm)	(483mm)	(406mm)	(194mm)	(1076mm)	(543mm)			(1219mm)
LRAD(Q) Serie	es										
LRAD2918	LRADQ2918	29	18	12	12	**	28-3/8	17-3/8	1,2,MR2,3,4, or 5	Centered	33
		(737mm)	(457mm)	(305mm)	(305mm)		(721mm)	(441mm)			(838mm)
LRAD2922	LRADQ2922	29	22	11-1/2	16	**	28-3/8	21-3/8	1,2,MR2,3,4, or 5	Off-Centered	33
		(737mm)	(559mm)	(292mm)	(406mm)		(721mm)	(543mm)			(838mm)
LRAD3319	LRADQ3319	33	19-1/2	14	14	**	32-3/8	18-7/8	1,2,MR2,3,4, or 5	Off-Centered	36
		(838mm)	(495mm)	(356mm)	(356mm)		(822mm)	(479mm)			(914mm)
LRAD3321	LRADQ3321	33	21-1/4	13-1/2	16	**	32-3/8	20-5/8	1,2,MR2,3,4, or 5	Off-Centered	36
		(838mm)	(540mm)	(343mm)	(406mm)		(822mm)	(524mm)			(914mm)
LRAD3722	LRADQ3722	37	22	16	16	**	36-3/8	21-3/8	1,2,MR2,3,4, or 5	Off-Centered	42
		(940mm)	(559mm)	(406mm)	(406mm)		(924mm)	(543mm)			(1067mm)

<sup>\*</sup>Length is left to right. Width is front to back.

<sup>\*\*</sup>Available in 4" (102mm), 4-1/2" (114mm), 5" (127mm), 5-1/2" (140mm), 6" (152mm) and 6-1/2" (165mm) depths. Please consult your sales representative for other depths or modifications.





Model LRAD(Q) Series Off-Centered Drain Model Only Illustrated † 4-1/2" (114mm) LRAD(Q)2922