

FEATURES & BENEFITS



STAINLESS
FRAME



STAINLESS
FRAME (LOCK)



INTEGRATED
FRAME



INTEGRATED
SOLID



BLACK
FRAME

| | |
|-------------------|---|
| PERFORMANCE | <ul style="list-style-type: none">• Volume of 5.2 cu ft holds up to 48 wine bottles (750 ml)• Digital Touch Pad Control is conveniently located on upper face of unit• Temperature range: 38°F - 65°F• Passive cooling system• Rubber mounted compressor virtually eliminates vibration |
| INTERIOR/EXTERIOR | <ul style="list-style-type: none">• Black interior is illuminated with LED lighting that automatically turns off when the door is closed, or can be set to stay on for 3 hours• Three-quarter extension black coated wine racks allow for easy access and prevent bottles from shifting• Wine racks accommodate a variety of bottle shapes and sizes, while the fourth and fifth racks allow for larger diameter wine and champagne bottles• LowE coated, argon gas filled, dual thermopane glass door provides protection from harmful UV light• Stainless steel handle (7/8" diameter)• Door swing is field reversible, and is shipped right-hand hinged |
| INTEGRATION | <ul style="list-style-type: none">• Unit is designed to be built-in or can be freestanding with additional accessory kit• Integrated model requires 3/4" custom door panel (panels not supplied by U-Line)• Four independently adjustable leveling legs provide a precise undercounter fit• Available in the following finishes: Stainless, Integrated, or Black |

MODEL DETAILS


| Model | Voltage/Hz | Door Swing | Finish | Shipping Weight |
|-----------------|------------|------------------|------------------------|-----------------|
| U-1224WCS-00B | 115 / 60 | Field Reversible | Stainless Frame | 133 lb |
| U-1224WCS-13B | 115 / 60 | Field Reversible | Stainless Frame (Lock) | 133 lb |
| U-1224WCINT-00B | 115 / 60 | Field Reversible | Integrated Frame | 130 lb |
| U-1224WCINT-60B | 115 / 60 | Field Reversible | Integrated Solid | 123 lb |
| U-1224WCB-00B | 115 / 60 | Field Reversible | Black Frame | 133 lb |

ACCESSORIES


| Model | Description | Finish | Shipping Weight |
|---------------|------------------|--------|-----------------|
| ULAFREESTANDB | Freestanding Kit | Black | 3 lb |

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

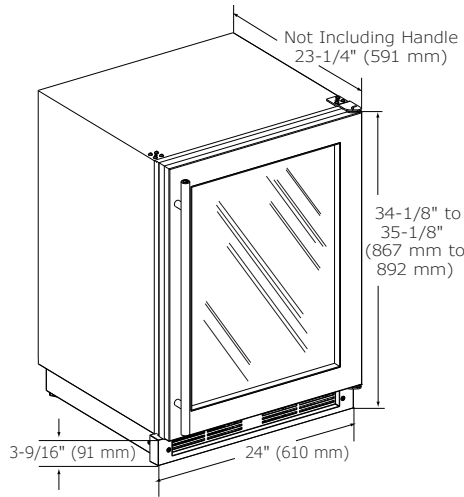

CABINET CUT-OUT

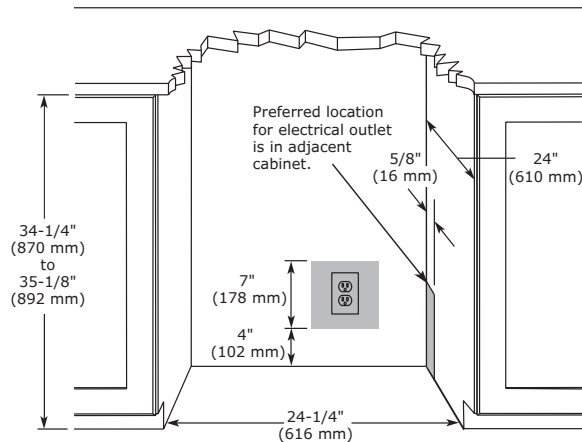

INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.

Cutout includes the additional 1/4" width overall to ensure proper installation.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + **Additional 1 Year (parts & labor) warranty at no cost with product registration**

See complete warranty for details

SPECIFICATIONS

| | |
|-----------------------------------|--|
| Model | 1224WC |
| Amps: Running | 1.2 |
| Capacity: Average Volume (cu ft) | 5.2 |
| Capacity: Wine Bottle (750 ml) | 48 |
| Control Type | Digital Touch Pad |
| Dimensions: Product Depth | 23 1/4" / 591 mm |
| Dimensions: Product Height | 34 1/8" / 867 mm |
| Dimensions: Product Width | 24" / 610 mm |
| Energy Consumption: Avg. Per Year | 110 kWh |
| ENERGY STAR | N/A |
| Panel Height | 30 1/4" / 768 mm |
| Panel Thickness | 3/4" / 20 mm |
| Panel Type | 2 3/4" / 70 mm Frame Panel or Solid Panel (-60 suffix) |
| Panel Width | 23 3/4" / 603 mm |
| Product Weight: Max | 123 lb |
| Refrigerant Type | R600a |
| Sabbath (Star K Certified) | Yes |
| Temperature Range | 38°F - 65°F |

COOLING SYSTEM



ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.