

CM420ESBL

33.38" x 19.5" x 21.25" (H x W x D)

ENERGY STAR qualified compact refrigerator-freezer in black, under 20 inches wide with front lock

Highlights:

ENERGY STAR qualified for higher efficiency and lower utility bills

Less than 20 inches wide to fit tight settings

Factory installed lock provides security you can count on


Door shelves and a clear crisper provide easy storage solutions



ENERGY STAR Qualified	Rated to perform with more efficiency than federal standards require, using less energy and saving on utility bills
Thin-line width	Limited space is no problem for our thin-line models, designed for easy placement in tight settings
Fully finished black cabinet	Allows the unit to be used freestanding
Factory installed lock	Keep contents secure with a front lock on the door
Reversible door	Keep placement options flexible with a reversible door swing that is easy to switch when your arrangement changes
Clear crisper	Get the longest life and best taste out of produce by storing greens in lower slide drawer
Adjustable shelves	Rearrange the refrigerator space to fit any sized item or remove shelves for simple cleanup
Door shelves	Store large bottles right on the door for easy access
Adjustable thermostat	Manage the temperature with ease and accuracy
Two can dispensers	Stack cans for an easy grab in two handy door compartments

Specifications:

Width 19.5" Depth 21.25" Capacity 4.1 cu.ft. Interior Height 1 22.0" Interior Width 1 17.0" Interior Depth 1 15.63" Interior Height 2 7.5" Interior Depth 2 9.75" Comp Step Height 8.0" Comp Step Width 17.0" Comp Step Depth 4.5" Shipping Weight 80.0 lbs. Amps 1.4 Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 1 Shelf Type Wire Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height	Height	33.38"
Capacity 4.1 cu.ft. Interior Height 1 22.0" Interior Width 1 17.0" Interior Depth 1 15.63" Interior Height 2 7.5" Interior Width 2 15.13" Interior Depth 2 9.75" Comp Step Height 8.0" Comp Step Width 17.0" Comp Step Depth 4.5" Shipping Weight 80.0 lbs. Amps 1.4 Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Width	19.5"
Capacity 4.1 cu.ft. Interior Height 1 22.0" Interior Width 1 17.0" Interior Depth 1 15.63" Interior Height 2 7.5" Interior Width 2 15.13" Interior Depth 2 9.75" Comp Step Height 8.0" Comp Step Width 17.0" Comp Step Depth 4.5" Shipping Weight 80.0 lbs. Amps 1.4 Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" <t< td=""><td>Depth</td><td>21.25"</td></t<>	Depth	21.25"
Interior Width 1 17.0" Interior Depth 1 15.63" Interior Height 2 7.5" Interior Width 2 15.13" Interior Depth 2 9.75" Comp Step Height 8.0" Comp Step Width 17.0" Comp Step Depth 4.5" Shipping Weight 80.0 lbs. Amps 1.4 Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Capacity	4.1 cu.ft.
Interior Depth 1	Interior Height 1	22.0"
Interior Height 2	<u> </u>	17.0"
Interior Width 2	Interior Depth 1	15.63"
Interior Width 2	Interior Height 2	7.5"
Comp Step Height 8.0" Comp Step Width 17.0" Comp Step Depth 4.5" Shipping Weight 80.0 lbs. Amps 1.4 Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0	· ·	15.13"
Comp Step Width 17.0" Comp Step Depth 4.5" Shipping Weight 80.0 lbs. Amps 1.4 Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0 <td>Interior Depth 2</td> <td>9.75"</td>	Interior Depth 2	9.75"
Comp Step Depth 4.5" Shipping Weight 80.0 lbs. Amps 1.4 Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Comp Step Height	8.0"
Comp Step Depth 4.5" Shipping Weight 80.0 lbs. Amps 1.4 Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Comp Step Width	17.0"
Shipping Weight 80.0 lbs. Amps 1.4 Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0		4.5"
Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0		80.0 lbs.
Canadian Electrical Safety ULC Energy Usage/Year 270.0 kWh/year Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0		1.4
Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Canadian Electrical Safety	ULC
Voltage/Frequency 115 V AC/60 Hz US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	•	270.0 kWh/year
US Electrical Safety UL Door Swing RHD Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0		115 V AC/60 Hz
Reversible Yes Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	US Electrical Safety	UL
Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Door Swing	RHD
Shelf Quantity 2 Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Reversible	Yes
Adjustable Shelf true Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Crisper Quantity	1
Shelf Type Wire Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Shelf Quantity	2
Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Adjustable Shelf	true
Crisper Finish Transparent Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Shelf Type	Wire
Full Door Shelf Quantity 1 Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Crisper Cover Type	Glass
Can Storage true Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Crisper Finish	Transparent
Defrost Type Manual Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Full Door Shelf Quantity	1
Depth with door at 90° 39.63" Height to Hinge Cap 33.75" Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Can Storage	true
Height to Hinge Cap 33.75"	Defrost Type	Manual
Thermostat Type Dial Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Depth with door at 90°	39.63"
Condensor Location Rear of Unit Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Height to Hinge Cap	33.75"
Freon Oz 2.1 Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Thermostat Type	Dial
Freon Type R134a Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Condensor Location	Rear of Unit
Level Legs Quantity 2 High Side PSI 238.0 Low Side PSI 103.0	Freon Oz	2.1
High Side PSI 238.0 Low Side PSI 103.0	Freon Type	R134a
Low Side PSI 103.0	Level Legs Quantity	2
	High Side PSI	238.0
Parts/Labor Warranty 1 Year	Low Side PSI	103.0
	Parts/Labor Warranty	1 Year
Compressor Warranty 5 Years	Compressor Warranty	5 Years

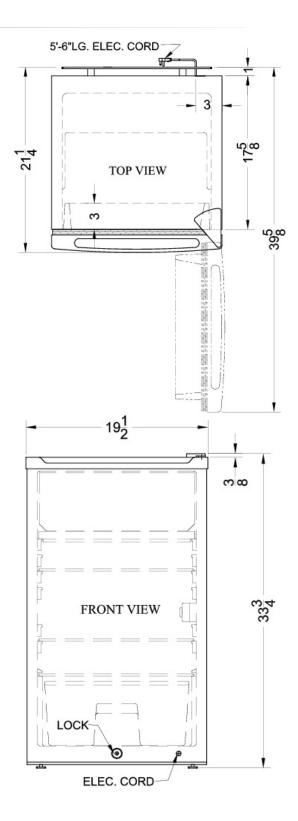

Phone: 718-893-3900 • Fax: 718-842-3093

Email: info@summitappliance.com