



DESIGN & CLASS FUNCTION

PRODUCT BROCHURE

### **OUR HISTORY**

This American story starts during the hectic times of World War II at an era where basic necessities were scarce and people went through life without common comforts that are now mostly taken for granted.

My father in his early 20's, married with children and living in a very cold region of the world with few available natural resources. He longed for a warm home for his young family.

"Necessity is the Mother of All Inventions". My Father, Mourad Demirjian, with a background as a plumber came up with an idea of using diesel fuel as a heat source. He realized that if he developed a way to control the amount of diesel fuel discharging he could achieve a constant flame. He developed a drip method system that could regulate the amount of fuel discharging. Then he designed a path of travel to allow the discharging fuel to flow into a welded metal chamber. Once capturing a clean burning flame and by using special louvers and heat transfer panels he was able to radiate constant heat into the room.

Once that was achieved, next he set his sights on designing a special flue to exhaust fumes produced by the burning fuel out of the room. After a few adjustments he had created his viable fuel-efficient space heater.

My Mother, being the center of the community, had many friends and relatives stopping by for visits. Once they took notice of our warm home there was an immediate demand for my father's new space heater.

As you can imagine, my father left his job as a plumber to focus on building his new space heaters to fulfill the quick risings demand. Later models incorporated a glass window to view the burning flames and a hot plate on top to keep food warm. I remember as a small child using it to melt cheese on bread for a quick snack.

In the late 60's my family immigrated to the United States. In the early 70's we started building custom commercial cooking equipment. This led us to develop our own brand of a production line-up of cooking equipment based on those one-of-a kind designs, which is supplied nationally and internationally to the food service industry. Along with building quality equipment we have also built quality relationships. These relationships created another demand and inspired us to build our commercial grade residential cooking appliances.



## AMERICAN®RANGE

QUALITY COOKING EQUIPMENT







1947

1947

1945









1945

Your Appliants Authority™

1969

800-570-3355



DESIGNED & BUILT IN USA










### **CONTENTS**

|      | OUR HISTORY   | 2 - 3   |
|------|---|---------|
|      | FREESTANDING RANGES   |         |
|      | Cuisine Series Sealed Burner Gas Ranges                     | 6 - 7   |
|      | Performer Series Open Burner Gas Ranges                     | 8 - 9   |
|      | Heritage Classic Series Sealed Burner Gas Ranges            | 10 - 13 |
|      | Medallion Series Dual Fuel Self-Clean Ranges                | 14 - 17 |
|      | Titan Series Step-Up Gas Ranges                             | 18 - 19 |
|      | Titan Series Step-Up Dual Fuel Self-Clean Ranges            | 20 - 21 |
|      | FRENCH AND CHEF DOOR WALL OVENS                             |         |
|      | Legacy Series Single Deck Gas and Electric Wall Ovens       | 22 - 23 |
|      | Legacy Series Double Deck Gas or Electric Wall Ovens        | 24 - 25 |
| M. / | Legacy Series Double Deck Hybrid Wall Ovens Gas & Electric. | 26 - 27 |
| IV   | SLIDE-IN COOKTOPS   |         |
| Your | Legend Series Slide-In Cooktops                             | 28 - 30 |
|      | WARMING DRAWERS   |         |
| )_/  | Villa Series Warming Drawers                                | 31      |
| / .  | J/ U-JJJJ   |         |
|      | PRODUCT SPECIFICATIONS                                      | 32 - 54 |
|      | Cuisine Gas Ranges  | 34      |
|      | Performer Gas Ranges  | 35      |
|      | Heritage Gas Ranges   | 36 - 37 |
|      | Medallion Dual Fuel Ranges                                  | 38 - 39 |
|      | Titan Gas Ranges  | 40 - 41 |
|      | Titan Dual Fuel Ranges                                      | 41 - 43 |
|      | Legacy Wall Ovens   |         |
|      | Legend Slide-In Cook Tops                                   |         |
|      | Legend Slide-In Step-Up Cook Tops                           | 53      |
|      | Villa Warming Drawers                                       | 54 - 55 |

13592 Desmond St., Pacoima, CA 91331 - 818.897.0808 - 888.753.9898 www.americanrange.com



## CUISINE SERIES







## CUISINE SERIES SEALED BURNER FREESTANDING GAS RANGES



Cuisine range with 5 sealed gas burners, 30" Innovection® oven with infrared gas broiler. Island back included and installed. Shown with optional leg caps & 4" riser. 70

Cuisine range with 6 sealed gas burners,
36" Innovection® oven with infrared gas broiler.
Island back included and installed.
Shown with optional leg caps & 4" riser.



ARR-530



ARR-436GD



ARR-636



ARR-436GR



#### RAPID HEAT OUTPUT

Rapid heat output and superior heat distribution boils water, sautes and cooks your favorite dishes, while reducing cooking time.

3 sizes of burners serve your everyday needs:

Large burner: 17,000 BTU
Medium burner: 13,000 BTU
Small burner: 9,000 BTU



#### CUSTOMIZE YOUR RANGE

Now you can customize your American Range to match your kitchen setting. Pick from numerous colors and finishes to give your range a unique one-of-a-kind look. For more details regarding color and finish options go to our website; www.americanrange.com.

## PERFORMER SERIES





THE **POWER** OF COOKING AT HOME



## PERFORMER SERIES OPEN BURNER FREESTANDING GAS RANGES

#### TRUE COMMERCIAL PERFORMANCE



Performer range with 4 lift-off open gas burners, 30" Innovection® oven with infrared gas broiler. Island back included and installed. Shown with optional leg caps & 4" riser.

-570 - 3

Performer range 6 lift-off open gas burners, 36" Innovection® oven with infrared gas broiler. Island back included and installed. Shown with optional leg caps & 4" riser.



ARROB-430



ARROB-436GD



ARROB-636



ARROB-436GR



#### LIFT-OFF OPEN BURNER

Our exclusive 6 star lift-off open burner is specially designed for high performance and even heat distribution.

Large burner: 25,000 BTU
Medium burner: 18,000 BTU
Small burner: 12,000 BTU

The easy lift-off feature makes cleaning of burner head quick and easy.



#### S/S SPILLTRAY

All Performer series open burner ranges are equipped with all Stainless Steel pull-out trays to catch spill-overs.

## HERITAGE CLASSIC SERIES





#### HERITAGE CLASSIC RANGE FEATURES



LARGEST OVEN CAPACITY IN THE INDUSTRY Our 30" and 36" range ovens can easily accommodate a full size commercial sheet pan.

Oven capacity: 18" oven - 2.7 cu. ft. 24" oven - 3.8 cu. ft.

30" oven - 4.9 cu. ft. 36" oven - 6.0 cu. ft.



#### INNOVECTION® OVENTECHNOLOGY

Innovection® Convection with it's dual fan system, optimizes uniform air flow and a balances turbulent heat distribution when baking, roasting and dehydrating food, reducing cooking time, reducing gas usage, and delivering superior product.



#### HEAVY DUTY KNOBS

Solid die cast heavy duty satin finish black knobs set in a chrome plated bezel with LED indicator lights for each knob, illuminate when burners are on. Knobs also available as an option in Red or Burgundy.



#### RAPID HEAT OUTPUT

Rapid heat output and superior heat distribution boils water, sautes and cooks your favorite dishes, while reducing cooking time.

 $\boldsymbol{3}$  sizes of burners to serve your everyday needs.



#### LIFT OFF BURNERS

Spills happen. Our stainless steel sealed cooktop contains more than a gallon of liquid spills. Burner caps and rings lift off for easy cleaning and are dishwasher safe.

## HERITAGE CLASSIC SERIES

### SEALED BURNER FREESTANDING GAS RANGES



Heritage Classic range
with 4 sealed gas burners,
24" Innovection® oven
with Inconel® infrared broiler.
Shown with optional leg caps & 4" riser.

Heritage Classic range
with 4 sealed gas burners,
30" Innovection® oven
with Inconel® infrared broiler.
Shown with optional leg caps & 4" riser.

Heritage Classic range
with 6 sealed gas burners,
36" Innovection® oven
with Inconel® infrared broiler.
Shown with optional leg caps & 4" riser.



ARR-244



ARR-304



ARR-364GD



ARR-366



ARR-364GR



## COMMERCIAL GRADE INCONEL® BROILER BURNER

Constructed from Inconel® stainless steel a superior alloy developed to withstand high heat and abuse, the 16,000 BTU infrared burner delivers broiling temperatures up to 1,800°F perfect for searing steak, fish or any food of your choice. This respective burner is utilized in our commercial products.



#### RAPID HEAT OUTPUT

Rapid heat output and superior heat distribution boils water, sautes and cooks your favorite dishes, while reducing cooking time.

3 sizes of burners serve your everyday needs:

Large burner: 17,000 BTU
Medium burner: 13,000 BTU
Small burner: 9,000 BTU


## HERITAGE CLASSIC SERIES

#### SEALED BURNER FREESTANDING GAS RANGES



Heritage Classic range with 4 sealed gas burners with 22" griddle, I 8" & 30" Innovection® ovens with Inconel® infrared broiler in each oven. 18" oven is a fully functional bake and convection oven. Shown with optional leg caps & 4" riser.

Heritage Classic range with 6 sealed gas burners with I I"wide grill and I I" wide griddle (2) 30" Innovection® ovens with Inconel® infrared broiler in each oven.





ARR - 486GD






ARR - 484GDGR



ARR - 4842GD




ARR - 486GR





ARR - 606GDGR ARR - 6062GD



ARR - 606X2GR



#### MIRROR CHROME GRIDDLES (UPGRADE OPTION)

Our new mirror chrome griddle finish is a shining example of our commitment to cooking innovation. Four models to choose from - flat, half-flat-half-grooved with flavor separator, and all-grooved, to help the discerning chef prepare dishes with restaurant-style look and flavor in the comfort of your own kitchen.



#### LARGEST CAPACITY OVENS IN THE MARKET

Our 30", 36" 48" & 60" range ovens easily accommodate commercial full size sheet pans.

Our offering of maximum capacity ovens:

18" oven - 2.7 cu. ft. 24" oven - 3.8 cu. ft. 30" oven - 4.9 cu. ft.

36" oven - 6.0 cu. ft.

## MEDALLION SERIES DUAL FUEL SELF-CLEAN RANGES





#### MEDALLION SERIES FEATURES



#### **HEAVY DUTY KNOBS**

Solid die cast heavy duty satin finish black knobs set in a chrome plated bezel with LED indicator lights for each knob, illuminate when burners are on.

Knobs also available as an upgrade in Red or Burgundy colors



#### **BURNER FEATURES**

n a

3 sizes of burners for your everyday needs:

17,000 BTU'S, (Ig), 13,000 BTU'S (med), 9,000 BTU's (sm)

All burners are lift-off style for easy cleaning.

Built in simmer features on all burners.

Automatic re-ignition will light and relight burners at any

position, even on lowest settings.

Saled single piece tooled Staipless Steel cooktop can hold.

Sealed single piece tooled Stainless Steel cooktop can hold more than a gallon of spills.



#### BAKE ELEMENT°

The computer controlled 3,500 watt bake element heats to red in seconds and holds the oven precisely to the temperature you select. Quick heat up and accurate temperature control takes the guess work out of your cooking adventure.



#### PROGRAMMABLE DIGITAL CONTROL

Simply select Bake Temperature and Time, the on-board computer creates perfect oven conditions for professional cooking results. Convection cooking is just a touch away, Timed Broil, Keep Warm, Self-Clean, and all other programs as well, including Child-Lock-Out feature to keep inquisitive hands out of mischief.

## MEDALLION SERIES

#### DUAL FUEL SELF-CLEAN FREESTANDING RANGES

Sealed gas burners with electronic oven controls



Medallion range with 4 sealed gas burners, 30" electric self-clean oven with electric infrared broiler. Shown with optional leg caps & 4" riser. Medallion range with 6 sealed gas burners, 36" electric self-clean oven with electric infrared broiler. Shown with optional leg caps & 4" riser.



ARR-304DF



ARR-364GDDF



ARR-366DF



ARR-364GRDF



#### PROGRAMMABLE DIGITAL CONTROL

Simply select Bake Temperature and Time, the on-board computer creates perfect oven conditions for professional cooking results.

Convection cooking is just a touch away, Timed Broil, Keep Warm, Self-Clean, and all other programs as well, including Child-Lock-Out feature to keep inquisitive hands out of mischief.



## MEDALLION SERIES

### DUAL FUEL SELF-CLEAN FREESTANDING RANGES

Sealed gas burners with electronic oven controls



Medallion Range with 4 sealed gas burners and 22" gas griddle (1) 18" gas Innovection® oven with gas Inconel® infrared broiler and (1) 30" electric self-clean oven with electric infrared broiler.

Shown with optional leg caps & 4" riser.




ARR - 486GDDF ARR



ARR - 484X2GRDF



ARR - 484GDGRDF



ARR - 606GDGRDF




with II" gas grill and II" gas griddle (2) 30" electric self-clean

ovens with electric infrared broiler in each oven.

Shown with optional leg caps & 4" riser.

ARR - 6062GDDF



ARR-606X2GRDF





ARR - 4842GDDF

ARR - 486GRDF



### MIRROR CHROME GRIDDLES (UPGRADE OPTION)

Our new mirror chrome griddle finish is a shining example of our commitment to cooking innovation. Four models to choose from – flat, half-flat-half-grooved with flavor separator, and all-grooved, to help the discerning chef prepare dishes with restaurant-style look and flavor in the comfort of your own kitchen.



## TITAN STEP-UP SERIES



## TITAN STEP-UP SERIES

#### STEP-UP FREESTANDING GAS RANGES WITH SEALED BURNERS



Titan range with 4 sealed gas step-up burners, 24" Innovection® oven with Inconel® infrared broiler in oven.
Welded Island back included and installed.
Shown with optional leg caps.

Titan range with 4 sealed gas step-up burners,
30" Innovection® oven
with Inconel® infrared broiler in oven,
Welded Island back included and installed.
Shown with optional leg caps.

Titan range with 6 sealed gas step-up burners, 36" Innovection® oven with Inconel® infrared broiler in oven.
Welded island back included and installed.
Shown with optional leg caps.







ARR-304IS



ARR-366IS



#### COMMERCIAL GRADE BROILER BURNER

Constructed from Inconel® stainless steel material a superior alloy developed to withstand high heat and abuse, the 18,000 BTU burner delivers broiling temperatures up to 1,800°F perfect for searing steak, fish or any food of your choice.

This respective burner is utilized in our commercial products.



#### **BURNER FEATURES**

3 sizes of burners to serve your everyday needs:

Large burner: 17,000 BTU
Medium burner: 13,000 BTU
Small burner: 9,000 BTU

All burners are lift off-style for easy cleaning. Built in simmer feature on all burners. Automatic re-ignition will light and relight burners at any position even on lowest settings.

## TITAN STEP-UP SERIES STEP-UP DUAL FUEL SELF-CLEAN RANGES



## TITAN STEP-UP SERIES

#### STEP-UP FREESTANDING DUAL FUEL SELF-CLEAN RANGES

Sealed gas burners with electronic oven controls



30"00 570 33536"

Titan range with 4 step-up sealed gas burners, 30" electric self-clean oven infrared broiler. Welded island back included and installed.

Shown with optional leg caps.

Titan range with 6 step-up sealed gas burners, 36" electric self-clean oven with infrared broiler. Welded island back included and installed. Shown with optional leg caps.



ARR-304ISDF



ARR-366ISDF



#### CONVENIENCE OF

### THE UNIQUE STEP-UP RANGE The Step-up range provides 2 different

The Step-up range provides 2 different levels of cooking surface. The elevated rear burners provide easy access to sauté pans and allow larger pots to be used consecutively. Home chefs can easily orchestrate multiple entrees and sauces.



#### BAKE ELEMENT

The computer controlled bake element heats to red in seconds and holds the oven precisely to the temperature you select. Quick heat up and accurate temperature control takes the guess work out of your cooking adventure.

## LEGACY SERIES FRENCH AND CHEF DOOR WALL OVENS



## LEGACY SERIES

## 30" SINGLE DECK FRENCH & CHEF DOOR WALL OVENS **♦** GAS OR **≠** ELECTRIC

#### FRENCH DOOR

#### CHEF DOOR



Your Appliance Authorit30" 30'

**GAS** 

-570 - 33AROFG-30

Legacy 30" single french door gas Innovection® wall oven with infrared broiler.

**GAS** 

AROSG-30

Legacy 30" single chef door gas Innovection® wall oven with infrared broiler.



AROFE-30

Legacy 30" single french door electric Innovection® wall oven with infrared broiler.

#### **<b>#** ELECTRIC

AROSE-30

Legacy 30" single chef door electric Innovection® wall oven with infrared broiler.



#### INNOVECTION® OVEN TECHNOLOGY

Innovection® Convection with it's dual fan system, optimizes uniform air flow and a balances turbulent heat distribution when baking, roasting and dehydrating food, reducing cooking time, reducing gas usage, and delivering superior product.





# LEGACY SERIES DOUBLE DECK FRENCH & CHEF DOOR WALL OVENS



## LEGACY SERIES

### 30" DOUBLE DECK FRENCH & CHEF WALL OVENS

**♦** GAS OR **∮** ELECTRIC

#### DOUBLE FRENCH DOOR OVEN

#### DOUBLE CHEF DOOR OVEN



#### FRENCH & CHEF DOOR OVEN



30" 800-578"-3355

#### **♦** AROFFG-230

Legacy 30" double french doors gas Innovection® wall ovens with infrared broiler in top oven and proofing element in bottom oven.

#### #AROFFE-230

Legacy 30" double wall ovens with double french doors, electric Innovection® wall oven with electric infrared broil in each oven.

#### **♦** AROSSG-230

Legacy 30" double chef doors gas Innovection® wall ovens with infrared broiler in top oven and proofing element in bottom oven.

#### **∮**AROSSE-230

Legacy 30" double wall ovens with chef door on top and chef door on bottom, electric Innovection® wall oven with electric infrared broil in each oven.

### **♦** AROFSG-230

Legacy 30" double gas wall oven french doors on top, chef door on bottom, with infrared broiler in top oven and proofing element in bottom oven.

30"

#### **∮** AROFSE-230

Legacy 30" double wall oven french doors on top, chef door on bottom, electric Innovection® wall ovens with electric infrared broiler in each oven.



#### HEAVY DUTY KNOBS

Solid die cast heavy duty knobs set in chrome plated bezels with LED indicator lights, illuminated when ovens are on.

Available as an upgrade in Red or Burgundy. (Optional red knobs shown.)



## LEGACY SERIES 30" DOUBLE DECK HYBRID WALL OVENS

**♦** GAS & **≠** ELECTRIC



## BEST OF BOTH WORLDS

#### 30" DOUBLE DECK HYBRID WALL OVENS

**♦** GAS & **≠** ELECTRIC

DOUBLE FRENCH DOOR OVEN

**DOUBLE CHEF** DOOR OVEN

FRENCH & CHEF DOOR OVEN







30'' 30''

**♦ I** AROFFHGE-230 Legacy Series combination

French door gas oven and broiler on top French door electric oven and broiler on bottom. **♦ F** AROSSHGE-230

Legacy Series combination Chef door gas oven and broiler on top Chef door electric oven and broiler on bottom. **♦ F**AROFSHGE-230

Legacy Series combination French door gas oven and broiler on top Chef door electric oven and broiler on bottom.



#### DEPENDENT FRENCH DOORS

The dependant french doors incorporate an opening and closing mechanism allowing doors to move out of your way with a pull of one handle, so you may have total access of the oven without having a hot door directly in your



## LEGEND SERIES SLIDE-IN COOKTOPS





## LEGEND SERIES SLIDE-IN COOKTOPS







24''

ARSCT-244

Legend 24" cook top with 4 sealed gas burners. Shown with optional 4" riser.

30"

ARSCT-304

Legend 30" cook top with 4 sealed gas burners. Shown with optional 4" riser.

36"

#### ARSCT-366

Legend 36" cook top with 6 sealed gas burners. Shown with optional 4" riser.



ARSCT-244





ARSCT-242GD ARSCT-24X2GR











ARSCT-366





#### RAPID HEAT OUTPUT

Rapid heat output and superior heat distribution boils water, sautes and cooks your favorite dishes, while reducing cooking time.

3 sizes of burners serve your everyday needs:

Large burner: 17,000 BTU Medium burner: 13.000 BTU 9,000 BTU Small burner:



## LEGEND SERIES SLIDE-IN COOKTOPS

our Appliance Auth





48"

#### ARSCT-486GD

Legend 48" cook top with 6 sealed gas burners and 11" griddle. Shown with optional 4" riser.



ARSCT-488



ARSCT-486GD



ARSCT-486GR



ARSCT-484GDGF



ARSCT-4842GD



ARSCT-484X2GR

60''

#### ARSCT-606GD

Legend 60" cook top with 6 sealed gas burners, with 11" grill and 11" griddle.

Shown with optional 4" riser.



ARSCT-606GDGR



ARSCT-6062GD



ARSCT-606X2GR



#### COMMERCIAL GRADE GRILL BURNER

Constructed from Inconel® stainless steel material, a superior alloy developed to withstand high heat and abuse, the 18,000 BTU infrared broiler burner delivers broiling temperatures up to 1,800°F perfect for searing steak, fish or any food of your choice.

This respective burner is utilized in our commercial products.



### CUSTOMIZE YOUR COOKTOPS

Customize your cook tops with the configuration that best serves you.

Choose your preferred combination of burners, griddles, broilers and even a step-up burner:

Contact factory for more details.

## VILLA SERIES WARMING DRAWERS





Create the ultimate culinary utopia with the exclusive American Range combination wall oven and Villa Series convection warming drawer.

Whether you choose this combination or combine any of our wall oven models with one of our convection warming drawers, these culinary tools will astound you with the convenience of their powerful integrated design, outstanding performance and simple installation.



#### **CUISINE SERIES**

- 3 sizes of burners to serve your everyday needs: 17,000 BTU (lg), 13,000 BTU (med), 9,000 BTU (sm)
- Stainless Steel Island Back Trim included & installed
- Continuous and flush commercial-grade cast iron grates allow for easy transfer of pots and pans across the entire cooking surface
- Sealed burners deliver exceptional performance at every level setting and lift off to provide easy cleanup
- Sealed burners create simmer temperatures at minimum setting
- Variable infinite flame settings for all sealed top burners
- Fail-safe system ensures re-ignition in the event the flame goes out even on the lowest burner setting
- Sealed Single Piece tooled porcelainized cook top can hold more than a gallon of spills
- Analog controls provide easy, push and turn operation ensuring child safety
- Blue LED light indicates oven functions
- · Heavy metal die-cast black satin knobs with chrome bezels
- Oven front construction is a durable, precision-made one piece frame
- Innovection® System with convection fan optimizes uniform air flow
- Multiple functions include: Standard Bake, Innovection<sup>®</sup> Convection Bake, Infrared Broil and Fan mode
- Front panel switch controls oven lighting for optimal visibility
- Accommodates full size commercial sheet pan
- Two chrome racks glide at 5 cooking levels on heavy chrome side supports
- · Porcelainized oven interior simplifies cleaning
- Extra-large viewing window in oven door
- Ceramic Infrared Broiler provides rapid searing at 1,800°F
- Quick Preheat times and uniform cooking temperatures are created with a 28,000 BTU Bake Burner
- Traditional and Convection Bake can be controlled to provide a range of 200°F to 500°F

#### HERITAGE CLASSIC SERIES


- 3 sizes of burners to serve your everyday needs: 17,000 BTU (lg), 13,000 BTU (med), 9,000 BTU (sm)
- Continuous and flush commercial-grade cast iron grates allow for easy transfer of pots and pans across the entire cooking surface
- Sealed burners deliver exceptional performance at every level of setting and lift off to provide easy cleanup
- Sealed burners create simmer temperatures at minimum setting
- Variable infinite flame settings for all sealed top burners
- Fail-safe system ensures re-ignition in the event the flame goes out even on the lowest burner setting
- Sealed Single Piece tooled stainless steel cook top can hold more than a gallon of spills
- Analog controls provide easy, push and turn operation ensuring child safety
- Blue LED lights indicate flame and oven functions provided with every knob
- · Heavy metal die-cast black satin knobs with chrome bezels
- Innovection® System with two convection fans optimizes uniform air flow
- Multiple functions include: Standard Bake, Innovection<sup>®</sup> Convection Bake, Infrared Broil and Fan mode
- Two lights in each oven are controlled from front panel switch
- Accommodates full size commercial sheet pan
- Two chrome racks glide at 5 (including base) cooking levels on heavy chrome side supports
- Porcelainized oven interior simplifies cleaning
- Extra-large viewing window in oven door
- Inconel Banquet™ broiler burner provides rapid searing at 1,800°F
- Quick Preheat times and uniform cooking temperatures are created with a 30,000 BTU Bake Burner
- Traditional and Convection Bake can be controlled to provide a range of 200°F to 500°F

#### PERFORMER SERIES

- 3 sizes of burners to serve your everyday needs: 25,000 BTU (lg), 18,000 BTU (med) and 12,000 BTU (sm)
- True commercial lift-off burners deliver exceptional performance at every power level and provide for easy cleaning
- · Stainless Steel Island Back Trim included and installed
- Continuous and flush commercial-grade cast iron grates allow for easy transfer of pots and pans across the entire cooking surface
- Variable infinite flame settings for all open top burners
- Fail-safe system ensures re-ignition in the event the flame goes out even on the lowest burner setting
- Porcelainized burner pans catch spills and lift out for easy cleaning
- Removable stainless steel tray catches spills
- Analog controls provide easy, push and turn operation ensuring child safety
- Blue LED light indicates oven functions
- Heavy duty metal die-cast black satin knobs with chrome bezels
- One piece durable precision frame construction oven front
- Innovection® System with convection fan optimizes uniform air flow
- Multiple functions include: Standard Bake, Innovection<sup>®</sup> Convection Bake, Infrared Broil and Fan mode
- · Front panel switch controls oven lighting for optimal visibility
- Accommodates full size commercial sheet pan
- Two chrome plated heavy duty racks with 5 (including base) positions on heavy chrome side supports
- Porcelainized oven interior simplifies cleaning
- Extra-large viewing window in oven door
- Ceramic Infrared Broiler provides rapid searing at 1,800°F
- Quick Preheat times and uniform cooking temperatures are created with a 28,000 BTU Bake Burner
- Traditional and Convection Bake can be controlled to provide a range of 200°F to 500°F

#### MEDALLION SERIES

- 3 sizes of burners to serve your everyday needs: 17,000 BTU (lg), 13,000 BTU (med), 9,000 BTU (sm)
- Continuous and flush commercial-grade cast iron grates allow for easy transfer of pots and pans across the entire cooking surface
- Built in electronic timer control helps keep track of cooking events
- Sealed burners deliver exceptional performance at
- every level setting and lift off to provide easy clean-up
- Sealed burners create simmer temperatures at minimum setting
- Variable infinite flame settings for all sealed top burners
- Fail-safe system ensures re-ignition in the event the flame goes out even on the lowest burner setting
- Sealed Single Piece stainless steel cook top can hold more than a gallon of spills
- Blue LED lights indicate flame functions provided with every knob
- · Heavy metal die-cast black satin knobs with chrome bezels
- · Electronic keypad with blue VFD display
- Multiple functions include: Full Power modes for Standard Bake, Convection Bake, Infrared Broil, or Warm modes for Dehydrate, Crisping and Proofing
- Child lock-out function ensures safety
- Commercial grade high performance thermal insulation keeps kitchen cool
- Programmable timed self clean for effortless oven maintenance
- Two lights in each oven are controlled from front panel switch
- Accommodates full size commercial sheet pan
- Two chrome racks glide at 5 (including base) cooking levels on heavy chrome side supports
- Commercial grade high temperature porcelainized oven interior makes for simple cleaning
- 3,500 Watt Instagrill™ broiler reaches searing temperature in 3 seconds
- Straight Convection™ with a single high-speed convection fan, 2,200 Watt convection ring heater and proprietary, stainless steel air flow directors
- Infrared energy from hidden bake and broil elements shine through high transparency glass ceramic windows
- Stainless steel air flow directors provide even distribution of convection air for uniform oven temperatures
- Traditional and Convection Bake can be controlled to a range of 150°F to 550°F

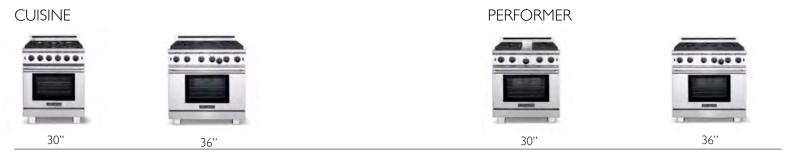

#### HERITAGE CLASSIC








#### CUT-OUT DIMENSIONS FOR ALL ABOVE RANGE UNITS

Island or peninsula installations - 10" min, clearance from back of range to combustible surface, Island trim 0" clearance to non-combustible surface. No side wall above cooking surface.


Electrical outlet for gas oven - standard 3 prong 120 VAC. Electrical outlet for electric oven - 240 VAC. Allow for shut off valve at gas outlet. Island peninsula installations require a 10" minimum clearance from back of range to a combustible surface. No side wall above cooking surface.

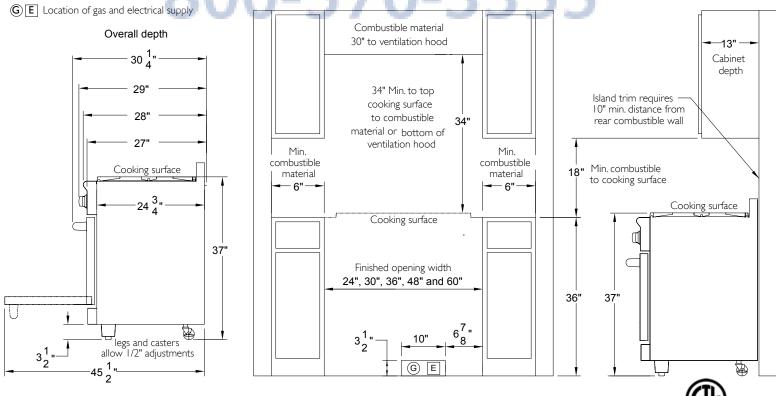


#### **CUISINE SERIES**

#### GAS RANGES WITH SEALED BURNERS, INNOVECTION® OVEN AND INFRARED BROILER

| 30" FREESTANDING ALL GAS 5 SEALED BURNER GAS RANGE |  |  |  |
|--|--|--|--|
| Overall Oven Capacity                              | 4.3 CU. FT.  |  |  |
| Oven Dimensions                                    | 26"W x I9" D x I5" H                               |  |  |
| Surface Burner Rating                              | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |  |  |
| Infrared Broiler                                   | 17,000 BTU   |  |  |
| Oven Bake Burner                                   | 28,000 BTU   |  |  |
| Total Gas Connection Rating                        | ARR-530 114,000 BTU 5 burners                      |  |  |
| per model #  |  |  |  |
| Gas Supply   | 7" W.C. Natural, 11" W.C. Propane                  |  |  |
| Electrical Supply                                  | 120 VAC 15 AMP 60 Hz Single Phase                  |  |  |
| Shipping Weight                                    | 330.5 Lbs  |  |  |
|  | ,  |  |  |

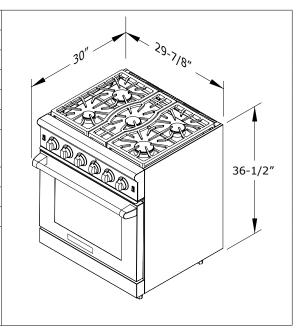

| 36" FREESTANDING ALL GAS SEALED BURNER GAS RANGE |  |  |  |
|--|--|--|--|
| Overall Oven Capacity                            | 5.3 CU. FT.  |  |  |
| Oven Dimensions                                  | 32"W × 19" D × 15" H                               |  |  |
| Surface Burner Rating                            | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |  |  |
| Infrared Broiler                                 | 17,000 BTU   |  |  |
| Griddle Burner Rating                            | 20,000 BTU   |  |  |
| Grill Burner Rating                              | 18,000 BTU   |  |  |
| Oven Bake Burner                                 | 28,000 BTU   |  |  |
| Total Gas Connection Rating                      | ARR-636   131,000 BTU   6 burners                  |  |  |
| per model #                                      | ARR-436GD 121,000 BTU 4 burners and 11" griddle    |  |  |
|  | ARR-436GR 119,000 BTU 4 burners and 11" grill      |  |  |
| Gas Supply                                       | 7" W.C. Natural, 11" W.C. Propane                  |  |  |
| Electrical Supply                                | 120 VAC 15 AMP 60 Hz Single Phase                  |  |  |
| Shipping Weight                                  | 339.5 Lbs  |  |  |

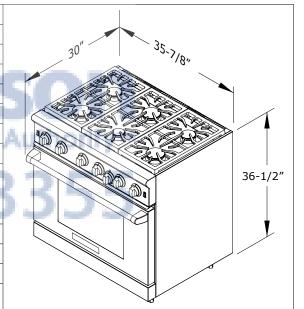

| ACCESSORIES              | 30"           | 36"           | ACCESSORIES                  | 30"           | 36"             |
|--------------------------|---------------|---------------|------------------------------|---------------|-----------------|
| Island Back (Standard)   | ARR-30SIB-C   | ARR-36SIB-C   | 12'' Grill Cover             | N/A           | ARR-GRCOV12-C   |
| Island Back (Welded)     | ARR-30IB-C    | ARR-36IB-C    | 12'' Griddle Cover           | N/A           | ARR-GDCOV12-S-C |
| 4" Stub Back             | ARR-304SB-C   | ARR-364SB-C   | 12'' Removable Griddle Plate | N/A           | ARR-PGP12 -C    |
| 20" High Back with Shelf | ARR-3021HBS-C | ARR-3621HBS-C | Cutting Board                | ARR-CUTB-12-C | ARR-CUTB-12-C   |
| Curb Base                | ARR-30CB-C    | ARR-36CB-C    | Wok Adapter                  | ARR-WOK-C     | ARR-WOK-C       |
| Leg Caps (set of 2)      | ARR-2LC-C     | ARR-2LC-C     |                              |               |                 |

N= Natural Gas
 L= LP Gas
 Must provide N or L after model for type of gas needed.
 Example: AROFG-30L, represents unit to be built for LP gas.


Must specifiy elevation if over 1,000 ft. when ordering.




#### PERFORMER SERIES

#### GAS RANGES WITH OPEN BURNERS, INNOVECTION® OVEN AND INFRARED BROILER

| 30" FREESTANDING ALL GAS 4 OPEN BURNER GAS RANGE |   |  |  |
|--|---|--|--|
| Overall Oven Capacity                            | 4.3 CU. FT. (1 oven)                              |  |  |
| Oven Dimensions                                  | 26"W x 19" D x 15"H                               |  |  |
| Surface Burner Rating                            | 25,000 BTU (lg), 18,000 BTU (md), 12,000 BTU (lg) |  |  |
| Infrared Broiler                                 | 17,000 BTU  |  |  |
| Oven Bake Burner                                 | 28,000 BTU  |  |  |
| Total Gas Connection Rating                      | ARROB-430 125,000 BTU 4 burners                   |  |  |
| per model #                                      |   |  |  |
| Gas Supply                                       | 7" W.C. Natural, 11" W.C. Propane                 |  |  |
| Electrical Supply                                | 120 VAC 15 AMP 60 Hz Single Phase                 |  |  |
| Shipping Weight                                  | 335 Lbs   |  |  |
|  | · · · · · · · · · · · · · · · · · · ·             |  |  |

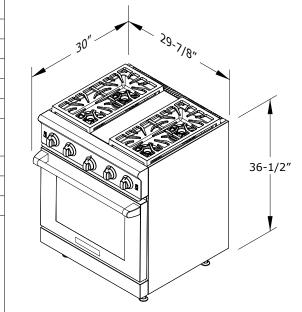

| 36" FREESTANDING ALL        | gas open burner gas range                               |     |
|-----------------------------|---|-----|
| Overall Oven Capacity       | 5.3 CU. FT.   |     |
| Oven Dimensions             | 32"W x 19" D x 15" H                                    | 30" |
| Surface Burner Rating       | 25,000 BTU (lg), 18,000 BTU (md), 12,000 BTU (lg)       |     |
| Infrared Broiler            | 17,000 BTU  |     |
| Griddle Burner Rating       | 20,000 BTU  |     |
| Grill Burner Rating         | 18,000 BTU Value A mallanea A                           |     |
| Oven Bake Burner            | 28,000 BTU  |     |
| Total Gas Connection Rating | ARROB-636 168,000 BTU 6 burners                         |     |
| per model #                 | ARROB-436GD 145,000 BTU 4 burners and 11" griddle       |     |
|                             | ARROB-436GR   142,000 BTU   4 burners and     1 " grill |     |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane                       |     |
| Electrical Supply           | 120 VAC 15 AMP 60 Hz Single Phase                       |     |
| Shipping Weight             | 401 Lbs   |     |
|                             |   |     |
|                             |   | 1   |

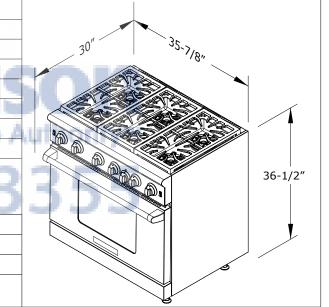

| ACCESSORIES              | 30"           | 36"           | ACCESSORIES                  | 30"           | 36"             |
|--------------------------|---------------|---------------|------------------------------|---------------|-----------------|
| Island Back (Standard)   | ARR-30SIB-P   | ARR-36SIB-P   | 12" Grill Cover              | N/A           | ARR-GRCOV12-P   |
| Island Back (Welded)     | ARR-30IB-P    | ARR-36IB-P    | 12'' Griddle Cover           | N/A           | ARR-GDCOV12-S-P |
| 4" Stub Back             | ARR-304SB-P   | ARR-364SB-P   | 12'' Removable Griddle Plate | N/A           | ARR-PGP12 -P    |
| 20" High Back with Shelf | ARR-3021HBS-P | ARR-3621HBS-P | Cutting Board                | ARR-CUTB-12-P | ARR-CUTB-12-P   |
| Curb Base                | ARR-30CB-P    | ARR-36CB-P    | Wok Adapter                  | ARR-WOK-P     | ARR-WOK-P       |
| Leg Caps (set of 2)      | ARR-2LC-P     | ARR-2LC-P     |                              |               |                 |


. . . . . .

N= Natural Gas Must provide N or L after model for type of gas needed.
 L = LP Gas Example: AROFG-30L, represents unit to be built for LP gas.
 Must specify elevation if over 1,000 ft. when ordering.


#### HERITAGE CLASSIC SERIES

#### GAS RANGES WITH SEALED BURNERS, INNOVECTION® OVEN AND INFRARED BROILER


| 24" FREESTANDING ALL GAS RANGE WITH SEALED BURNERS |  |  |  |
|--|--|--|--|
| Overall Oven Capacity                              | 3.8 CU. FT.  |  |  |
| Oven Dimensions                                    | 20 -1/2"W x 20 -1/2" D x 15 -1/2" H                |  |  |
| Surface Burner Rating                              | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |  |  |
| Infrared Broiler                                   | 18,000 BTU   |  |  |
| Oven Bake Burner                                   | 30,000 BTU   |  |  |
| Total Gas Connection Rating                        | ARR-244 104,000 BTU 4 burners                      |  |  |
| per model #  |  |  |  |
| Gas Supply   | 7" W.C. Natural, 11" W.C. Propane                  |  |  |
| Electrical Supply                                  | 120 VAC 15 AMP 60 Hz Single Phase                  |  |  |
| Shipping Weight                                    | 340 Lbs  |  |  |

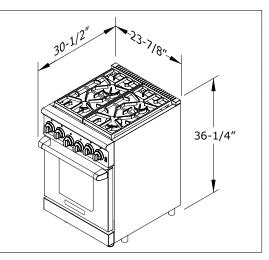

| 30" FREESTANDING ALL GAS RANGE WITH SEALED BURNERS |  |  |  |
|--|--|--|--|
| Overall Oven Capacity                              | 4.9 CU. FT.  |  |  |
| Oven Dimensions                                    | 26 -1/2"W × 20 -1/2" D × 15 -1/2" H                |  |  |
| Surface Burner Rating                              | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |  |  |
| Infrared Broiler                                   | 18,000 BTU   |  |  |
| Oven Bake Burner                                   | 30,000 BTU   |  |  |
| Total Gas Connection Rating                        | ARR-304 104,000 BTU 4 burners                      |  |  |
| per model #  |  |  |  |
| Gas Supply   | 7" W.C. Natural, I I" W.C. Propane                 |  |  |
| Electrical Supply                                  | 120 VAC 15 AMP 60 Hz Single Phase                  |  |  |
| Shipping Weight                                    | 407 Lbs  |  |  |
|  | Warra Amadlanaa                                    |  |  |

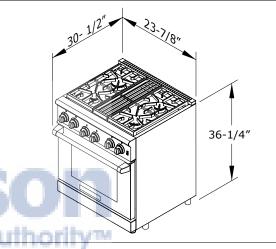

| 36" FREESTANDING ALL GAS RANGES WITH SEALED BURNERS |  |  |  |
|---|--|--|--|
| Overall Oven Capacity                               | 6.0 CU. FT.  |  |  |
| Oven Dimensions                                     | 32 - 1/2''W × 20 - 1/2'' D × 15 - 1/2" H           |  |  |
| Surface Burner Rating                               | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |  |  |
| Griddle Burner Rating                               | 20,000 BTU   |  |  |
| Grill Burner Rating                                 | 18,000 BTU for every 11" section                   |  |  |
| Infrared Broiler                                    | 18,000 BTU for every 11" section                   |  |  |
| Oven Bake Burner                                    | 30,000 BTU   |  |  |
| Total Gas Connection Rating                         | ARR-366   134,000 BTU   6 burners                  |  |  |
| per model #   | ARR-364GD 124,000 BTU 4 burners and griddle        |  |  |
|   | ARR-364GR 122,000 BTU 4 burners and grill          |  |  |
| Gas Supply  | 7" W.C. Natural, 11" W.C. Propane                  |  |  |
| Electrical Supply                                   | 120 VAC 15 AMP 60 Hz Single Phase                  |  |  |
| Shipping Weight 440 Lbs                             |  |  |  |

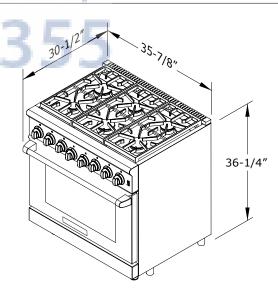


| ACCESSORIES              | 30"           | 36"           | ACCESSORIES                  | 30"           | 36"             |
|--------------------------|---------------|---------------|------------------------------|---------------|-----------------|
| Island Back (Standard)   | ARR-30SIB-H   | ARR-36SIB-H   | 12" Grill Cover              | N/A           | ARR-GRCOV12-H   |
| Island Back (Welded)     | ARR-30IB-H    | ARR-36IB-H    | 12'' Griddle Cover           | N/A           | ARR-GDCOV12-S-H |
| 4" Stub Back             | ARR-304SB-H   | ARR-364SB-H   | 12'' Removable Griddle Plate | N/A           | ARR-PGP12 -H    |
| 20" High Back with Shelf | ARR-3021HBS-H | ARR-3621HBS-H | Cutting Board                | ARR-CUTB-12-C | ARR-CUTB-12-H   |
| Curb Base                | ARR-30CB-H    | ARR-36CB-H    | Wok Adapter                  | ARR-WOK-C     | ARR-WOK-H       |
| Leg Caps (set of 2)      | ARR-2LC-H     | ARR-2LC-H     |                              |               |                 |




# HERITAGE CLASSIC SERIES

### GAS RANGES WITH SEALED BURNERS, INNOVECTION® OVEN AND INFRARED BROILER

| 48" FREESTANDING ALL        | gas ranges w                                    | ITH SEALED BURNERS                       |  |  |
|-----------------------------|---|--|--|--|
| Overall Oven Capacity       | 2.7 CU. FT. (18" oven) - 4.9 CU. FT. (30" oven) |  |  |  |
| Oven Dimensions             | 14 - 1/2''W × 20 - 1                            | /2" D x 15 -1/2" H (18" oven)            |  |  |
|                             | 26 - 1/2''W × 20 - 1                            | /2" D x 15 -1/2" H (30" oven)            |  |  |
| Surface Burner Rating       | 17,000 BTU (lg) -                               | 13,000 BTU (md) - 9,000 BTU (sm)         |  |  |
| Griddle Burner Rating       | 20,000 BTU for ev                               | ery 11" section                          |  |  |
| Grill Burner Rating         | 18,000 BTU for ev                               | ery II" section                          |  |  |
| Infrared Broiler            | 18,000 BTU each o                               | 18,000 BTU each oven                     |  |  |
| Oven Bake Burner            | 30,000 BTU each oven                            |  |  |  |
| Total Gas Connection Rating | ARR-486GD                                       | 190,000 BTU 6 burners and griddle        |  |  |
| per model #                 | ARR-486GR                                       | 188,000 BTU 6 burners and grill          |  |  |
|                             | ARR-484GDGR                                     | 178,000 BTU 4 burners, griddle and grill |  |  |
|                             | ARR-4842GD                                      | 180,000 BTU 4 burners double griddle     |  |  |
|                             | ARR-484X2GR                                     | 176,000 BTU 4 burners double grill       |  |  |
| Gas Supply                  | 7" W.C. Natural, I                              | I'' W.C. Propane                         |  |  |
| Electrical Supply           | 120 VAC 15 AMP 60 Hz Single Phase               |  |  |  |
| Shipping Weight             | 660 Lbs   |  |  |  |

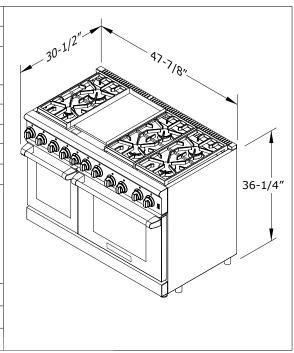

| 60" FREESTANDING ALL        | GAS RANGES WITH SEALED BURNERS                               |  |  |
|-----------------------------|--|--|--|
| Overall Oven Capacity       | 4.9 CU.FT. each oven   |  |  |
| Oven Dimensions             | 26 -1/2"W × 2 <mark>0 -1</mark> /2" D × 15 -1/2 H" each oven |  |  |
| Surface Burner Rating       | 9,000 BTU (sm), 13,000 BTU (md), 17,000 BTU (lg)             |  |  |
| Griddle Burner Rating       | 20,000 BTU per every 11" section                             |  |  |
| Grill Burner Rating         | 18,000 BTU per every 11" section                             |  |  |
| Infrared Broiler            | 18,000 BTU each oven   |  |  |
| Oven Bake Burner            | 30,000 BTU each oven   |  |  |
| Total Gas Connection Rating | ARR-606GDGR 220,000 BTU 6 burners, griddle and grill         |  |  |
| per model #                 | ARR-6062GD 222,000 BTU 6 burners and double griddle          |  |  |
|                             | ARR-606X2GR 218,000 BTU 6 burner and double grill            |  |  |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane                            |  |  |
| Electrical Supply           | 120 VAC 15 AMP 60 Hz Single Phase                            |  |  |
| Shipping Weight             | 780 Lbs  |  |  |

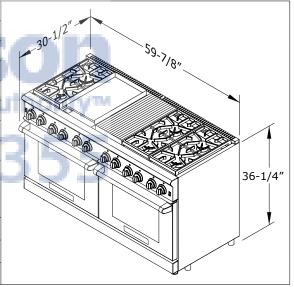

| ACCESSORIES              | 48"           | 60"           | ACCESSORIES                  | 48"             | 60"             |
|--------------------------|---------------|---------------|------------------------------|-----------------|-----------------|
| Island Back (Standard)   | ARR-48SIB-H   | ARR-60SIB-H   | 12'' Grill Cover             | ARR-GRCOV12-H   | ARR-GRCOV12-H   |
| Island Back (Welded)     | ARR-48IB-H    | ARR-60IB-H    | 12'' Griddle Cover           | ARR-GDCOV12-S-H | ARR-GDCOV12-S-H |
| 4'' Stub Back            | ARR-484SB-H   | ARR-604SB-H   | 24" Griddle Cover            | ARR-GDCOV24-S-H | ARR-GDCOV24-S-H |
| 20" High Back with Shelf | ARR-4821HBS-H | ARR-6021HBS-H | 12'' Removable Griddle Plate | ARR-PGP12-H     | ARR-PGP12-H     |
| Curb Base                | ARR-48CB-H    | ARR-36CB-H    | Cutting Board                | ARR-CUTB-12-H   | ARR-CUTB-12-H   |
| Leg Caps (set of 2)      | ARR-2LC-H     | ARR-2LC-H     | Wok Adapter                  | ARR-WOK-H       | ARR-WOK-H       |


N= Natural Gas Must provide N or L after model for type of gas needed.
 L = LP Gas Example: AROFG-30L, represents unit to be built for LP gas.




#### MEDALLION SERIES

## DUAL FUEL SELF CLEAN RANGES WITH SEALED BURNERS. CONVECTION AND INFRARED BURNER

| 30" DUAL FUEL FREESTA       | nding self cleaning range                          |
|-----------------------------|--|
| Overall Oven Capacity       | 4.7 CU. FT.  |
| Oven Dimensions             | 26"W x 20 -3/4" D x 15" H                          |
| Surface Burner Rating       | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |
| Infrared Broiler            | 3,500 Watts  |
| Oven Bake Burner            | 3,500 Watts  |
| Convection Ring Element     | 2,200 Watts  |
| Total Gas Connection Rating | ARR-304DF 56,000 BTU                               |
| per model #                 |  |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane                  |
| Electrical Supply           | 240 VAC 30 AMP 60 Hz Single Phase                  |
| Shipping Weight             | 401 Lbs  |
|                             |  |

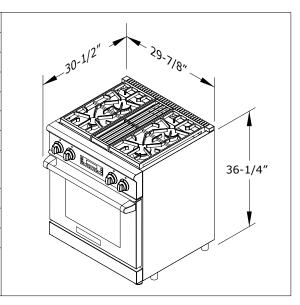

| nding self cleaning ranges                                       | 1  |
|--|--|
| 5.7 CU. FT.  |  |
| 31 -3/4"W × 20 -3/4" D × 15" H                                   | 30-1/2 35-7/2"   |
| 17,000 B <mark>TU (Ig)</mark> - 13,000 BTU (md) - 9,000 BTU (sm) | 16"  |
| 20,000 BTU   |  |
| 18,00 <mark>0 BTU</mark>   |  |
| 3,500 Watts  |  |
| 3,500 Watts  |  |
| 2,200 Watts  |  |
| ARR-366DF 86,000 BTU 6 burners                                   |  |
| ARR-364GDDF 76,000 BTU 4 burners and 11" griddle                 |  |
| ARR-364GRDF 74,000 BTU 4 burners and 11" grill                   |  |
| 7" W.C. Natural, 11" W.C. Propane                                |  |
| 240 VAC 30 AMP 60 Hz Single Phase                                |  |
| 453 Lbs  |  |
|  | 31 -3/4"W x 20 -3/4"D x 15" H  17,000 BTU (Ig) - 13,000 BTU (md) - 9,000 BTU (sm)  20,000 BTU  18,000 BTU  3,500 Watts  3,500 Watts  2,200 Watts  ARR-366DF 86,000 BTU 6 burners  ARR-364GDDF 76,000 BTU 4 burners and 11" griddle  ARR-364GRDF 74,000 BTU 4 burners and 11" grill  7" W.C. Natural, 11" W.C. Propane  240 VAC 30 AMP 60 Hz Single Phase |

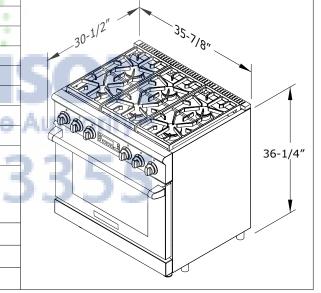

| ACCESSORIES              | 30"           | 36"           | ACCESSORIES                  | 30"           | 36"             |
|--------------------------|---------------|---------------|------------------------------|---------------|-----------------|
| Island Back (Standard)   | ARR-30SIB-M   | ARR-36SIB-M   | 12'' Grill Cover             | N/A           | ARR-GRCOV12-M   |
| Island Back (Welded)     | ARR-30IB-M    | ARR-36IB-M    | 12'' Griddle Cover           | N/A           | ARR-GDCOV12-S-M |
| 4" Stub Back             | ARR-304SB-M   | ARR-364SB-M   | 12'' Removable Griddle Plate | N/A           | ARR-PGP12 -M    |
| 20" High Back with Shelf | ARR-3021HBS-M | ARR-3621HBS-M | Cutting Board                | ARR-CUTB-12-C | ARR-CUTB-12-M   |
| Curb Base                | ARR-30CB-M    | ARR-36CB-M    | Wok Adapter                  | ARR-WOK-C     | ARR-WOK-M       |
| Leg Caps (set of 2)      | ARR-2LC-M     | ARR-2LC-M     |                              |               |                 |


**N**= Natural Gas Must provide **N** or **L** after model for type of gas needed. Example: AROFG-30**L**, represents unit to be built for LP gas.  $\mathbf{L} = \mathsf{LP} \; \mathsf{Gas}$ 




#### **MEDALLION SERIES**

## DUAL FUEL SELF CLEAN RANGES WITH SEALED BURNERS, CONVECTION AND INFRARED BROILER

| 48" DUAL FUEL FREESTA       | nding self cleaning ranges                         |  |  |
|-----------------------------|--|--|--|
| Overall Oven Capacity       | 2.7 CU. FT. (18" oven) - 4.7 CU. FT. (30" oven)    |  |  |
| Oven Dimensions             | 14 - 1/2"W x 20 - 1/2" D x 15 - 1/2" H (18" oven)  |  |  |
|                             | 26 - 1/2"W x 20 - 1/2" D x 15 - 1/2" H (30" oven)  |  |  |
| Surface Burner Rating       | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |  |  |
| Griddle Burner Rating       | 20,000 BTU - per every II" section                 |  |  |
| Grill Burner Rating         | 18,000 BTU - per every 11" section                 |  |  |
| Infrared Broiler Burner     | 13,500 BTU - (18" oven)                            |  |  |
| Oven Bake Burner            | 20,000 BTU - (18" oven)                            |  |  |
| Infrared Broiler Element    | 3,500 Watts - (30" oven)                           |  |  |
| Oven Bake Element Element   | 3,500 Watts - (30" oven)                           |  |  |
| Convection Ring Element     | 2,200 Watts - (30" oven)                           |  |  |
| Total Gas Connection Rating | ARR-486GDDF 142,000 BTU 6 burner and griddle       |  |  |
| per model #                 | ARR-486GRDF 140,000 BTU 6 burners and grill        |  |  |
|                             | ARR-4842GDDF 132,000 BTU 4 burners, double griddle |  |  |
|                             | ARR-484X2GRDF 128,000 BTU 4 burners, double grill  |  |  |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane                  |  |  |
| Electrical Supply           | 240 VAC 30 AMP 60 Hz Single Phase                  |  |  |
| Shipping Weight             | 680 Lbs  |  |  |

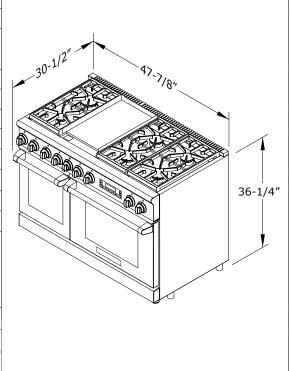

| 60" DUAL FUEL FREESTAI      | ndin <mark>g s</mark> elf <mark>cle</mark> aning ranges |
|-----------------------------|---|
| Overall Oven Capacity       | 4.7 CU. FT. each oven                                   |
| Oven Dimensions             | 2 <mark>6"W × 20 -3/4" D</mark> × I5"H                  |
| Surface Burner Rating       | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm)      |
| Griddle Burner Rating       | 20,000 BTU - per every II'' section                     |
| Grill Burner Rating         | 18,000 BTU - per every 11" section                      |
| Infrared Broiler Element    | 3,500 Watts (30" oven)                                  |
| Oven Bake Element           | 3,500 Watts (30" oven)                                  |
| Convection Ring Element     | 2,200 Watts (30" oven)                                  |
| Total Gas Connection Rating | ARR-6062GDDF 126,000 BTU 6 burner and griddle           |
| per model #                 | ARR-606X2GRDF 122,000 BTU 6 burners and grill           |
|                             | ARR-606GDGRDF 124,000 BTU 4 burners, double griddle     |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane                       |
| Electrical Supply           | 240 VAC 60 AMP 60 Hz Single Phase                       |
| Shipping Weight             | 800 Lbs   |

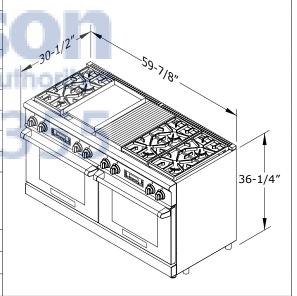

| ACCESSORIES              | 48"           | 60"           | ACCESSORIES                 | 48"             | 60"             |
|--------------------------|---------------|---------------|-----------------------------|-----------------|-----------------|
| Island Back (Standard)   | ARR-48SIB-M   | ARR-60SIB-M   | 12" Griddle Cover           | ARR-GRCOV12-M   | ARR-GRCOV12-M   |
| Island Back (Welded)     | ARR-48IB-M    | ARR-60IB-M    | 24" Griddle Cover           | ARR-GDCOV24-S-M | ARR-GDCOV24-S-M |
| Curb Base                | ARR-48CB-M    | ARR-60CB-M    | Cutting Board               | ARR-CUTB-12-M   | ARR-CUTB-12-M   |
| 4'' Stub Back            | ARR-484SB-M   | ARR-604SB-M   | 12" Removable Griddle Plate | ARR-GP12-M      | ARR-GP12-M      |
| 20" High Back with Shelf | ARR-4821HBS-M | ARR-6021HBS-M | 24" Removable Griddle Plate | ARR-GP24-M      | ARR-GP24-M      |
| Leg Caps (Set of 3)      | ARR-3LC-M     | ARR-3LC-M     | Wok ring                    | ARR-WOK-M       | ARR-WOK-M       |
| 12" Grill Cover          | ARR-GRCOV12-M | ARR-GRCOV12-M |                             |                 |                 |

N= Natural Gas Must provide N or L after model for type of gas needed.
 L = LP Gas Example: AROFG-30L, represents unit to be built for LP gas.



## TITAN SERIES GAS STEP-UP RANGES







#### **FEATURES**

- 3 sizes of burners to serve your everyday needs: 17,000 BTU (Ig), 13,000 BTU (med), 9,000 BTU (sm)
- Step-up range provides 2 unequal levels of cooking surface
- Elevated rear burners provide easy access to sauté pans, & allow larger pots to be used consecutively
- Home chef can orchestrate multiple entrees, sauces, mirepoix and/or mise en place.
- 3 Expansive front grates, able to accommodate 16" diameter sauté pans or stock pots
- Sealed burners deliver exceptional performance at every level setting and lift off to provide easy cleanup
- Sealed burners create simmer temperatures at minimum setting
- Variable infinite flame settings for all sealed top burners
- Fail-safe system ensures re-ignition in the event the flame goes out even on the lowest burner setting
- Sealed Single Piece tooled stainless steel cook tops can hold more than a gallon of spills


(G) E Location of gas and electrical supply


- Analog controls provide easy, push and turn operation ensuring child safety
- Blue LED lights indicate flame and oven functions provided with every knobs with chrome bezels
- Innovection® System with two convection fans optimize uniform air flow
- Multiple functions include: Standard Bake, Innovection<sup>®</sup> Convection Bake, Infrared Broil and Fan mode
- Two lights in each oven are controlled from front panel switch
- Full size commercial sheet pans fit in 30" and 36" oven
- Two chriome racks glide at 5 cooking levels on heavy chrome side supports
- Porcelainized oven interior simplifies cleaning
- Inconel® Banquet broiler burner provides rapid searing at 1,800°F
- Quick Preheat times and uniform cooking temperatures are created with a 30,000 BTU Bake Burner
- Traditional and Convection bake can be controlled to provide a range from 200°F to 500°F

#### TITAN SERIES STEP-UP RANGE CUT OUT DIMENSIONS

Island or peninsula installations - 10" min. clearance from back of range to combustible surface. Island trim 0" clearance to non-combustible surface. No side wall above cooking surface.


Electrical outlet - standard 3 prong I 20 VAC. Allow for shut off valve at gas outlet. Island peninsula installations require a 10" minimum clearance from back of range to a combustible surface. No side wall above cooking surface.

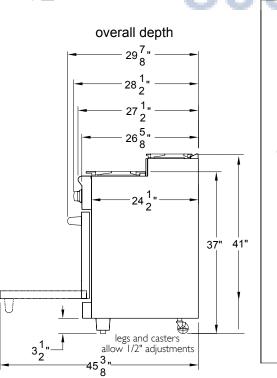

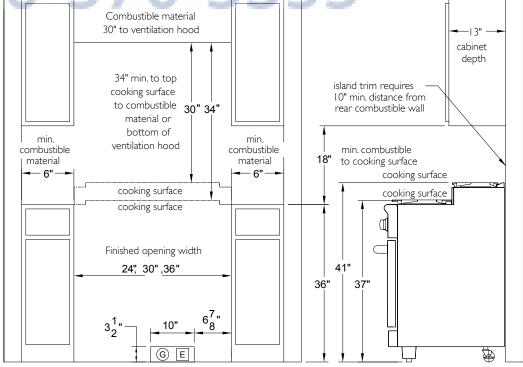


# TITAN SERIES GAS STEP-UP RANGES


| 24" FREESTANDING STEF       | P-UP GAS RANGE W/ SEALED BURNERS                   |
|-----------------------------|--|
| Overall Oven Capacity       | 3.8 CU. FT.  |
| Oven Dimensions             | 20 - I/2"W × 20 - I/2" D × I5 - I/2" H             |
| Surface Burner Rating       | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |
| Infrared Broiler            | 18,000 BTU each oven                               |
| Oven Bake Burner            | 30,000 BTU each oven                               |
| Total Gas Connection Rating | ARR-244IS 104,000 BTU                              |
| per model #                 |  |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane                  |
| Electrical Supply           | 240 VAC 15 AMP 60 Hz Single Phase                  |
| Shipping Weight             | 340 Lbs  |

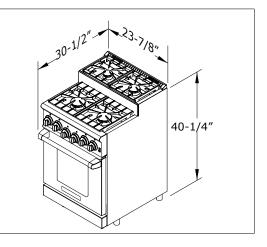

| 30" FREESTANDING STEF       | P-UP GAS RANGE W/ SEALED BURNERS                   |     |
|-----------------------------|--|-----|
| Overall Oven Capacity       | 4.9 CU. FT.  |     |
| Oven Dimensions             | 26 -1/2"W × 20-1/2" D × 15 -1/2" H                 |     |
| Surface Burner Rating       | 17,000 BTU (Ig) - 13,000 BTU (md) - 9,000 BTU (sm) | )   |
| Infrared Broiler            | 18,000 BTU each oven                               |     |
| Oven Bake Burner            | 30,000 BTU each oven                               |     |
| Total Gas Connection Rating | ARR-304IS 104,000 BTU                              |     |
| per model #                 |  |     |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane                  | 100 |
| Electrical Supply           | 120 VAC 15 AMP 60 Hz Single Phase                  | 15  |
| Shipping Weight             | 400 Lbs  |     |

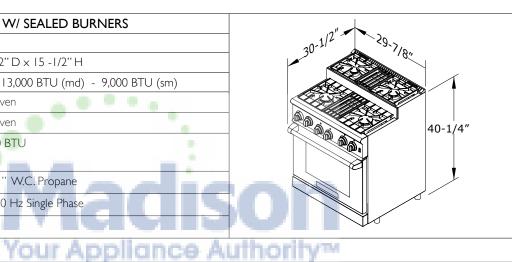

| 36" FREESTANDING STEP-UP RANGE WITH SEALED BURNERS |  |  |  |
|--|--|--|--|
| Overall Oven Capacity                              | 6.0 CU.FT.   |  |  |
| Oven Dimensions                                    | 32-1/2"W × 20-1/2"D × 15-1/2"H                     |  |  |
| Surface Burner Rating                              | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |  |  |
| Infrared Broiler                                   | 18,000 BTU each oven                               |  |  |
| Oven Bake Burner                                   | 30,000 BTU each oven                               |  |  |
| Total Gas Connection Rating                        | ARR-366IS 134,000 BTU                              |  |  |
| per model #  |  |  |  |
| Gas Supply   | 7" W.C. Natural, 11" W.C. Propane                  |  |  |
| Electrical Supply                                  | 120 VAC 15 AMP 60 Hz Single Phase                  |  |  |
| Shipping Weight                                    | 460 Lbs  |  |  |

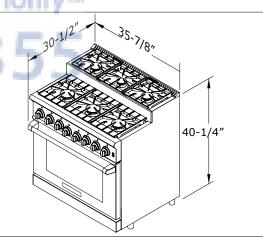

| ACCESSORIES              | 30"           | 36"           | ACCESSORIES                  | 30"       | 36"       |
|--------------------------|---------------|---------------|------------------------------|-----------|-----------|
| Island Back (Standard)   | ARR-30SIB-T   | ARR-36SIB-T   | 12'' Grill Cover             | N/A       | N/A       |
| Island Back (Welded)     | ARR-30IB-T    | ARR-36IB-T    | 12'' Griddle Cover           | N/A       | N/A       |
| 4'' Stub Back            | ARR-304SB-T   | ARR-364SB-T   | 12'' Removable Griddle Plate | N/A       | N/A       |
| 20" High Back with Shelf | ARR-3021HBS-T | ARR-3621HBS-T | Cutting Board                | N/A       | N/A       |
| Curb Base                | ARR-30CB-T    | ARR-36CB-T    | Wok Adapter                  | ARR-WOK-T | ARR-WOK-T |
| Leg Caps (set of 2)      | ARR-2LC-T     | ARR-2LC-T     |                              |           |           |

N= Natural Gas
 L= LP Gas
 Must provide N or L after model for type of gas needed.
 Example: AROFG-30L, represents unit to be built for LP gas.







# **FEATURES**

- 3 sizes of burners to serve your everyday needs: 17,000 BTU (lg), 13,000 BTU (med), 9,000 BTU (sm)
- Step-up range provides 2 unequal levels of cooking surface
- Elevated rear burners provide easy access to sauté pans, & allow larger pots to be used consecutively
- Home chef can orchestrate multiple entrees, sauces, mirepoix and/or mise en place
- 3 Expansive front grates, able to accommodate 16" diameter sauté pans or stock pots
- Sealed burners create simmer temperatures at minimum setting
- · Variable infinite flame settings for all sealed top burners
- Fail-safe system ensures re-ignition in the event the flame goes out even on the lowest burner setting
- Sealed Single Piece tooled stainless steel cook tops can hold more than a gallon of spills
- Analog controls provide easy, push and turn operation ensuring child safety
- Blue LED lights indicate flame and oven functions provided with every knob
- Heavy metal die-cast black satin knobs with chrome bezels
- Electronic keypad with blue VFD display
- Multiple functions include: Full Power modes for Standard Bake, Convection Bake, Infrared Broil, or Warm modes for Dehydrate, Crisping and Proofing

- · Child lock-out function ensures safety
- · Commercial grade high performance thermal insulation keeps kitchen cool
- Programmable timed self clean for effortless oven maintenance
- · Two lights in each oven are controlled from front panel switch
- Full size commercial sheet pans fit in 30" and 36" oven
- Two chrome racks glide at 5 cooking levels on heavy chrome side supports
- · Commercial grade high temperature porcelainized oven interior makes for simple cleaning
- 3,500 Watt Instagrill™ broiler reaches searing temperature in 3 seconds
- Straight Convection<sup>TM</sup> with a single high-speed convection fan, 2,200 Watt convection ring heater and proprietary, stainless steel air flow directors
- Infrared energy from hidden bake and broil elements shine through high transparency glass ceramic windows
- Stainless steel air flow directors provide even distribution of convection air, for uniform oven temperatures

Electrical outlet - 240 VAC. Allow for shut off valve at gas outlet.

Island peninsula installations require a 10" minimum clearance from back

of range to a combustible surface. No side wall above cooking surface.

Traditional and Convection Bake can be controlled to a range of 150°F to 550°F

TITAN SERIES STEP-UP RANGE CUT OUT DIMENSIONS

41" 37"

Island or peninsula installations - 10" min. clearance from back of range to combustible surface. Island trim 0" clear ance to non-combustible surface. No side wall above cooking surface.


26<sup>5</sup>


24 2

legs and casters allow 1/2" adjustments

© E Location of gas and electrical supply


overall depth

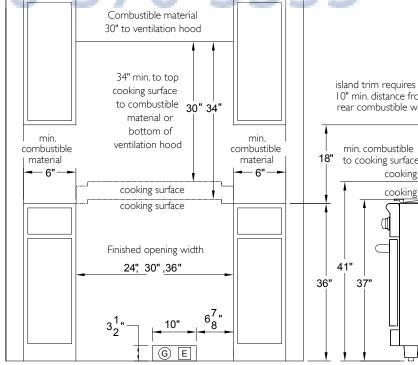

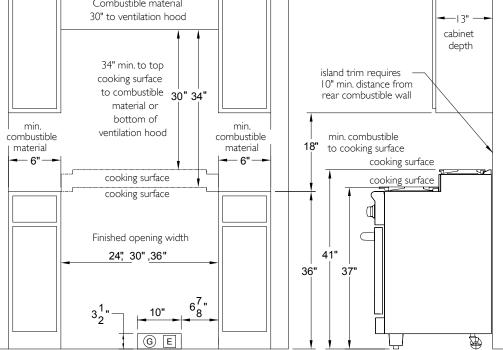

# TITAN SERIES DUAL FUEL SELF CLEAN STEP-UP RANGES

| 30" FREESTANDING STEP-UP DUAL FUEL SELF CLEANING RANGES |  |  |
|---|--|--|
| Overall Oven Capacity                                   | 4.7 CU. FT.  |  |
| Oven Dimensions   | 26"W x 20 -3/4" D x 15" H                          |  |
| Surface Burner Rating                                   | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |  |
| Infrared Broiler  | 3,500 Watts  |  |
| Oven Bake Burner  | 3,500 Watts  |  |
| Convection Ring   | 2,200 Watts  |  |
| Total Gas Connection Rating                             | ARR-304DFIS 56,000 BTU                             |  |
| per model #   |  |  |
| Gas Supply  | 7" W.C. Natural, 11" W.C. Propane                  |  |
| Electrical Supply                                       | 240 VAC 30 AMP 60 Hz Single Phase                  |  |
| Shipping Weight   | 400 Lbs  |  |

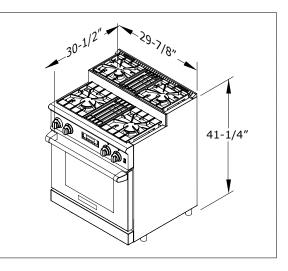

| 36" FREESTANDING STEE       | P-UP DUAL FUEL SELF CLEANING RANGES                |       |
|-----------------------------|--|-------|
| Overall Oven Capacity       | 5.7 CU. FT.  | 1/2"  |
| Oven Dimensions             | 31 -1/2"W × 20 -3/4" D × 15" H                     | 30"11 |
| Surface Burner Rating       | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |       |
| Griddle / Grill             | 20,0 <mark>00 BTU / 15,000 BTU</mark>              |       |
| Infrared Broiler            | 3,500 Watts  |       |
| Oven Bake Burner            | 3,500 Watts  |       |
| Convection Ring             | 2,200 Watts  | 41    |
| Total Gas Connection Rating | ARR-366DFIS 86,000 BTU                             |       |
| per model #                 |  |       |
| Gas Supply                  | 7" W.C. Natural, I I" W.C. Propane                 |       |
| Electrical Supply           | 240 VAC 30 AMP 60 Hz Single Phase                  |       |
| Shipping Weight             | 460 Lbs  |       |

| ACCESSORIES              | 30"           | 36"           | ACCESSORIES                  | 30"           | 36"             |
|--------------------------|---------------|---------------|------------------------------|---------------|-----------------|
| Island Back (Standard)   | ARR-30SIB-T   | ARR-36SIB-T   | 12" Grill Cover              | N/A           | ARR-GRCOV12-T   |
| Island Back (Welded)     | ARR-30IB-T    | ARR-36IB-T    | 12'' Griddle Cover           | N/A           | ARR-GDCOV12-S-T |
| 4" Stub Back             | ARR-304SB-T   | ARR-364SB-T   | 12'' Removable Griddle Plate | N/A           | ARR-PGP12 -T    |
| 20" High Back with Shelf | ARR-3021HBS-T | ARR-3621HBS-T | Cutting Board                | ARR-CUTB-12-T | ARR-CUTB-12-T   |
| Curb Base                | ARR-30CB-T    | ARR-36CB-T    | Wok Adapter                  | ARR-WOK-T     | ARR-WOK-T       |
| Leg Caps (set of 2)      | ARR-2LC-T     | ARR-2LC-T     |                              |               |                 |

N= Natural Gas Must provide N or L after model for type of gas needed.
 L = LP Gas Example: AROFG-30L, represents unit to be built for LP gas.

#### 30" SINGLE DECK WALL OVENS, FRENCH DOOR OR CHEF DOOR, GAS OR ELECTRIC



30" FRENCH DOOR



30" CHEF DOOR

#### **FEATURES**

#### **ALL MODELS**

- Blue LED lights indicate flame and oven functions
- Heavy die cast metal black satin knobs with chrome bezels
- Innovection® System with two convection fans optimizes cooking air flow
- Multiple functions include: Standard Bake, Innovection® Convection bake, Infrared Broil and Fan mode
- Two lights in each oven are controlled from front panel switch
- · Accommodates full size commercial sheet pan
- Two racks glide at 5 cooking levels on heavy chrome side supports
- · Porcelainized oven interior simplifies cleaning
- · Extra-large viewing window in oven door
- Traditional and Convection bake can be controlled to provide a range of 200°F to 500°F
- Commercial grade stainless steel construction with welded control panel
- Classic Chef Door or commercial-style French Doors improve oven access
   Dependent French Over data.
- Dependent French oven doors open 130° with the pull of one handle

#### **GAS MODELS**


- Inconel® Banquet broiler provides rapid searing at 1,800°F using 18,000 BTUs
- Quick Preheat times and uniform cooking temperatures are created with a 30,000 BTU Bake Burner
- Lower oven of gas double models features Proofing Element Burner for bread making and low temperature dehydrating

#### **ELECTRIC MODELS**

- 3,500 Watt Instagrill<sup>TM</sup> broiler reaches searing temperature in 3 seconds
- Concealed 2,200 Watt Bake Element with the IR Advantage™ reduces preheat times and creates uniform cooking temperatures


#### HYBRID MODELS

Best of both worlds - gas and electric combined.

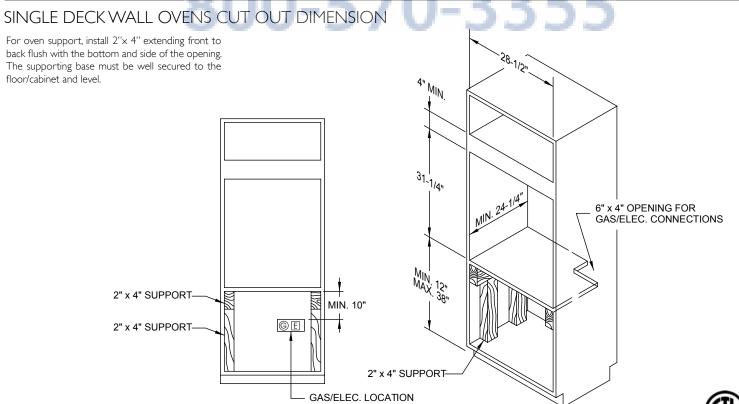


## 30" SINGLE DECK WALL OVENS, FRENCH DOOR OR CHEF DOOR, GAS OR ELECTRIC


| 30" SINGLE DECK FRENCH DOOR GAS WALL OVEN |                                   |  |
|---|-----------------------------------|--|
| Overall Oven Capacity                     | 4.7 CU. FT.                       |  |
| Oven Dimensions                           | 25-1/4"W × 20-3/4" D × 15-1/2" H  |  |
| Infrared Broiler                          | 18,000 BTU                        |  |
| Oven Bake Burner                          | 30,000 BTU                        |  |
| Total Gas Connection Rating               | AROFG-30 - 48,000 BTU             |  |
| per model #                               |                                   |  |
| Gas Supply                                | 7" W.C. Natural, 11" W.C. Propane |  |
| Electrical Supply                         | 120 VAC 15 AMP 60 Hz Single Phase |  |
| Shipping Weight                           | 304 Lbs                           |  |
|   |                                   |  |

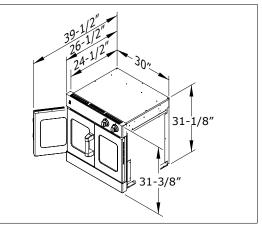


| 30" SINGLE DECK CHEF DOOR GAS WALL OVEN |                                   |  |  |
|---|-----------------------------------|--|--|
| Overall Oven Capacity                   | 4.7 CU. FT.                       |  |  |
| Oven Dimensions                         | 25-1/4"W × 20-3/4" D × 15-1/2" H  |  |  |
| Infrared Broiler                        | 18,000 BTU                        |  |  |
| Oven Bake Burner                        | 30,000 BTU                        |  |  |
| Total Gas Connection Rating             | AROSG-30 - 48,000 BTU             |  |  |
| per model #                             |                                   |  |  |
| Gas Supply                              | 7" W.C. Natural, 11" W.C Propane  |  |  |
| Electrical Supply                       | 120 VAC 15 AMP 60 Hz Single Phase |  |  |
| Shipping Weight                         | 304 Lbs                           |  |  |
|   | AIMAAIG                           |  |  |



| 30" SINGLE DECK FREN  | NCH DOOR ELECTRIC WALL OVEN                                |
|-----------------------|--|
| Overall Oven Capacity | 4.7 CU. FT. 40 11 4 10 10 10 10 10 10 10 10 10 10 10 10 10 |
| Oven Dimensions       | 25-1/4"W × 20-3/4" D × 15-1/2" H                           |
| Infrared Broiler      | 3,500 Watts  |
| Oven Bake Burner      | 2,200 Watts  |
| Model Number          | AROFE-30   |
| Electrical Supply     | 240 VAC 20 AMP 60 Hz Single Phase                          |
| Shipping Weight       | 291 Lbs  |
|                       |  |

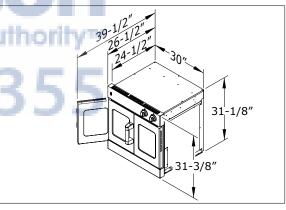

| 30" SINGLE DECK CHEF DOOR ELECTRIC WALL OVEN |                                   |  |
|--|-----------------------------------|--|
| Overall Oven Capacity                        | 4.7 CU. FT.                       |  |
| Oven Dimensions                              | 25-1/4"W × 20-3/4" D × 15-1/2" H  |  |
| Infrared Broiler                             | 3,500 Watts                       |  |
| Oven Bake Burner                             | 2,200 Watts                       |  |
| Model Number                                 | AROSE-30                          |  |
| Electrical Supply                            | 240 VAC 20 AMP 60 Hz Single Phase |  |
| Shipping Weight                              | 291 Lbs                           |  |
|  |                                   |  |
|  | •                                 |  |



N= Natural Gas
 L= LP Gas
 Must provide N or L after model for type of gas needed.
 Example: AROFG-30L, represents unit to be built for LP gas.





FRENCH DOOR TOP FRENCH DOOR BOTTOM



CHEF DOOR TOP

30"

CHEF DOOR BOTTOM



30"

FRENCH DOOR TOP CHEF DOOR BOTTOM

#### **FEATURES**

#### **ALL MODELS**

- Blue LED lights indicate flame and oven functions
- Heavy die cast metal black satin knobs with chrome bezels
- Innovection® System with two convection fans optimizes cooking air flow
- Multiple functions include: Standard Bake, Innovection® Convection bake, Infrared Broil and Fan mode
- Two lights in each oven are controlled from front panel switch
- Accommodates full size commercial sheet pan
- Two racks glide at 5 cooking levels on heavy chrome side supports
- · Porcelainized oven interior simplifies cleaning
- Extra-large viewing window in oven door
- Traditional and Convection bake can be controlled to provide a range of 200°F to 500°F
- Commercial grade stainless steel construction with welded control panel
- Easy to use analog controls
- Classic Chef Door or commercial-style French Doors improve oven access
- Dependent French oven doors open 130° with the pull of one handle

#### **GAS MODELS**

- Inconel® Banquet broiler provides rapid searing at 1,800°F using 18,000 BTUs
- Quick Preheat times and uniform cooking temperatures are created with a 30,000 BTU Bake Burner
- Lower oven of gas double models features Proofing Element Burner for bread making and low temperature dehydrating

#### ELECTRIC MODELS

- 3,500 Watt Instagril $I^{TM}$  broiler reaches searing temperature in 3 seconds
- Concealed 2,200 Watt Bake Element with the IR Advantage™ reduces preheat times and creates uniform cooking temperatures

#### HYBRID MODELS


• Best of both worlds - gas and electric combined.

**N**= Natural Gas Must provide N or L after model for type of gas needed.  $\mathbf{L} = \mathsf{LP} \; \mathsf{Gas}$ Example: AROFG-30L, represents unit to be built for LP gas.




## 30" DOUBLE DECK WALL OVENS - GAS OR ELECTRIC

| 30" GAS FRENCH DOOR OF      | NTOP, GAS FRENCH DOOR ON BOTTOM                           |
|-----------------------------|---|
| Oven Capacity / Dimensions  | 4.7 CU. FT. each oven / 25-1/4"W x 20-3/4"D x 15-1/2"H    |
| Infrared Broiler            | 18,000 BTU upper oven                                     |
| Oven Bake Burner            | 30,000 BTU upper and lower oven                           |
| Proof Element               | I,550 BTU (450 Watt) lower oven                           |
| Total Gas Connection Rating | AROFFG-230 - 78,000 BTU                                   |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane                         |
| Electrical Supply           | 120 VAC 15 AMP 60 Hz Single Phase                         |
| Shipping Weight             | 608 Lbs   |
| 30" ELECTRIC FRENCH DOO     | OR ON TOP, ELECTRIC FRENCH DOOR ON BOTTOM                 |
| Oven Capacity / Dimensions  | 4.7 CU. FT. each oven / 25-1/4" W x 20-3/4" D x 15-1/2" H |
| Infrared Broiler            | 3,500 Watts each oven                                     |
| Oven Bake Burner            | 2,200 Watts each oven                                     |
| Model #                     | AROFFE-230  |
| Electrical Supply           | 240 VAC 40 AMP 60 Hz Single Phase                         |
| Shipping Weight             | 608 Lbs   |

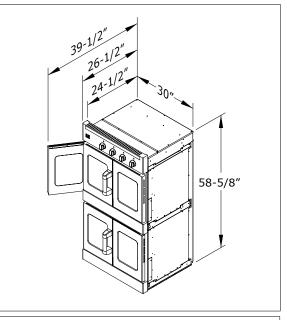


| 30" GAS CHEF DOOR ON TOP, GAS CHEF DOOR ON BOTTOM           |  |  |
|---|--|--|
| Oven Capacity / Dimensions                                  | 4.7 CU. FT. each oven / 25-1/4"W × 20-3/4"D × 15-1/2"H |  |
| Infrared Broiler  | 18,000 BTU upper oven                                  |  |
| Oven Bake Burner  | 30,000 BTU upper and lower oven                        |  |
| Proof Element   | I,550 BTU (45 <mark>0 W</mark> att) lower oven         |  |
| Total Gas Connection Rating                                 | AR <mark>OSSG-</mark> 230 <mark>- 78</mark> ,000 BTU   |  |
| Gas Supply  | 7" W.C. Natural, 11" W.C. Propane                      |  |
| Electrical Supply   | I20 VAC 15 AMP 60 Hz Single Phase                      |  |
| Shipping Weight   | 608 Lbs  |  |
| 30" ELECTRIC CHEF DOOR ON TOP, ELECTRIC CHEF DOOR ON BOTTOM |  |  |

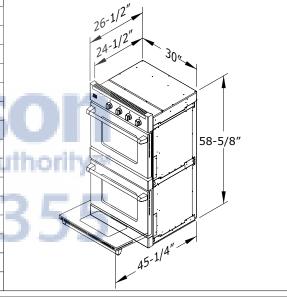

| 30" ELECTRIC CHEF DOOR ON TOP, ELECTRIC CHEF DOOR ON BOTTOM |  |  |
|---|--|--|
| Oven Capacity / Dimensions                                  | 4.7 CU. FT. each oven / 25-1/4"W x 20-3/4" D x 15-1/2" H |  |
| Infrared Broiler  | 3,500 Watts each oven                                    |  |
| Oven Bake Burner  | 2,200 Watts each oven                                    |  |
| Model #   | AROSSE-230   |  |
| Electrical Supply   | 240 VAC 40 AMP 60 Hz Single Phase                        |  |
| Shipping Weight   | 608 Lbs  |  |

| 30" GAS FRENCH DOOR TOP & GAS CHEF DOOR BOTTOM |   |  |
|--|---|--|
| Oven Capacity / Dimensions                     | 4.7 CU. FT. each oven / 25-1/4" W x 20-3/4" D x 15-1/2" H |  |
| Infrared Broiler                               | 18,000 BTU upper oven                                     |  |
| Oven Bake Burner                               | 30,000 BTU upper and lower oven                           |  |
| Proof Element                                  | I,550 BTU (450 Watt) lower oven                           |  |
| Total Gas Connection Rating                    | AROFSG-230 - 78,000 BTU                                   |  |
| Gas Supply                                     | 7" W.C. Natural, 11" W.C. Propane                         |  |
| Electrical Supply                              | 120 VAC 15 AMP 60 Hz Single Phase                         |  |
| Shipping Weight                                | 608 Lbs   |  |
| 30" ELECTRIC FRENCH DOO                        | OR ON TOP & ELECTRIC CHEF DOOR BOTTOM                     |  |
| Oven Capacity / Dimensions                     | 4.7 CU. FT. each oven / 25-1/4" W x 20-3/4" D x 15-1/2" H |  |
| Infrared Broiler                               | 3,500 Watts each oven                                     |  |
| Oven Bake Burner                               | 2,200 Watts (upper and lower)                             |  |
| Model #  | AROFSE-230  |  |
| Electrical Supply                              | 240 VAC 40 AMP 60 Hz Single Phase                         |  |
| Shipping Weight                                | 608 Lbs   |  |

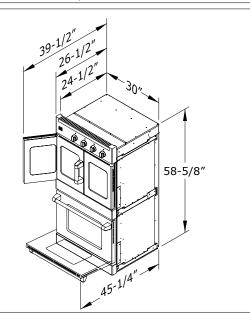

# LEGACY SERIES 30" DOUBLE DECK HYBRID WALL OVENS - GAS & ELECTRIC



♦ FRENCH DOOR TOP

FRENCH DOOR BOTTOM

DOUBLE WALL OVEN CUTOUT DIMENSIONS





♦ CHEF DOOR TOP ¶ CHEF DOOR BOTTOM FRENCH DOOR TOP

CHEF DOOR BOTTOM

30"

# For oven support, install 2"x 4" extending front to back flush with the bottom and side of the opening. The supporting base must be well secured to the floor/cabinet and level. State of the opening and level.

MIN. 10"

© E \

N= Natural Gas Must provide N or L after model for type of gas needed.
 L = LP Gas Example: AROFG-30L, represents unit to be built for LP gas.

GAS/ELEC. LOCATION-

2" x 4" SUPPORT

2" x 4" SUPPORT


Must specifiy elevation if over 1,000 ft, when ordering.



2" x 4" SUPPORT


# 30" DOUBLE DECK HYBRID WALL OVENS - GAS & ELECTRIC

| 30" DOUBLE DECK GAS FRENCH DOOR ON TOP, ELECTRIC FRENCH DOOR ON BOTTOM |  |  |  |
|--|--|--|--|
| Oven Capacity / Dimensions   | 4.7 CU. FT. each oven / 25-1/4"W x 20-3/4" D x 15-1/2" H |  |  |
| Infrared Broiler   | 18,000 BTU upper oven                                    |  |  |
| Oven Bake Burner   | 30,000 BTU upper oven                                    |  |  |
| Total Gas Connection Rating  | AROFFHGE-230 - 48,000 BTU                                |  |  |
| per model #  |  |  |  |
| Gas Supply   | 7" W.C. Natural, 11" W.C. Propane                        |  |  |
| Infrared Broiler   | 3,500 Watts lower oven                                   |  |  |
| Oven Bake Burner   | 2,200 Watts lower oven                                   |  |  |
| Electrical Supply  | 240 VAC 20 AMP 60 Hz Single Phase                        |  |  |
| Shipping Weight  | 608 Lbs  |  |  |

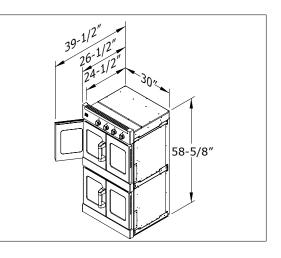

| 30" DOUBLE DECK GAS O       | N CHEF DOOR TOP & ELECTRIC ON CHEF DOOR BOTTOM           |
|-----------------------------|--|
| Oven Capacity / Dimensions  | 4.7 CU. FT. each oven / 25-1/4"W × 20-3/4" D × 15-1/2" H |
| Infrared Broiler            | 18,000 BTU upper oven                                    |
| Oven Bake Burner            | 30,000 BTU upper oven                                    |
| Total Gas Connection Rating | AROSSHGE-230 - 48,000 BTU                                |
| per model #                 |  |
| Gas Supply                  | 7" W.C. Natural, I I" W.C. Propane                       |
| Infrared Broiler            | 3,500 Watts lower oven                                   |
| Oven Bake Burner            | 2,200 Watts lower oven                                   |
| Electrical Supply           | 240 VAC 20 AMP 60 Hz Single Phase                        |
| Shipping Weight             | 608 Lbs  |
|                             | 0UU-0/U-55   |

| 30" DOUBLE DECK GAS FRENCH DOOR TOP & ELECTRIC CHEF DOOR BOTTOM |  |  |  |  |
|---|--|--|--|--|
| Oven Capacity / Dimensions                                      | 4.7 CU. FT. each oven / 25-1/4"W × 20-3/4" D × 15-1/2" H |  |  |  |
| Infrared Broiler  | 18,000 BTU upper oven                                    |  |  |  |
| Oven Bake Burner  | 30,000 BTU upper oven                                    |  |  |  |
| Total Gas Connection Rating                                     | AROFSHGE-230 - 48,000 BTU                                |  |  |  |
| per model #   |  |  |  |  |
| Gas Supply  | 7" W.C. Natural, 11" W.C. Propane                        |  |  |  |
| Infrared Broiler  | 3,500 Watts lower oven                                   |  |  |  |
| Oven Bake Burner  | 2,200 Watts lower oven                                   |  |  |  |
| Electrical Supply   | 240 VAC 20 AMP 60 Hz Single Phase                        |  |  |  |
| Shipping Weight   | 608 Lbs  |  |  |  |

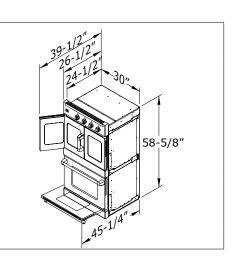

N= Natural Gas Must provide N or L after model for type of gas needed.
 L = LP Gas Example: AROFG-30L, represents unit to be built for LP gas.
 Must specify elevation if over 1,000 ft. when ordering.



# LEGEND SERIES SLIDE-IN COOKTOPS

#### **FFATURES**

- 3 sizes of burners to serve your everyday needs: 17,000 BTU (lg), 13,000 BTU (med), 9,000 BTU (sm)
- · Continuous and flush commercial-grade cast iron grates allow for easy transfer of pots and pans across the cooking surface
- Sealed burners deliver exceptional performance at every level setting and lift off to provide easy cleanup
- Sealed burners create simmer temperatures at minimum setting
- · Variable infinite flame settings for all sealed top burners
- Fail-safe system ensures re-ignition in the event the flame goes out even on the lowest burner setting
- Sealed single piece tooled stainless steel cook top can hold more than a gallon of spills
- · Analog controls provide easy, push and turn operation ensuring child safety
- Blue LED lights indicate flame and oven functions provided with every knob
- · Heavy metal die-cast black satin knobs with chrome bezels

#### **ACCESSORIES & OPTIONS**

- Mirror chrome finish griddle plates available in flat surface & grooved surfaces
- I" standard fabricated Island back
- I" welded Island back
- 4" Stub back
- 20" High back with shelf

- · Removable griddle plate
- Griddle cover
- Grill cover
- Wok Adapter
- Bright red knobs
- Burgundy knobs


#### SLIDE-IN COOKTOPS CUT-OUT DIMENSIONS


Island or peninsula installations - 10" min. clearance from back of range to combustible surface. Island trim 0" clearance to non-combustible surface. No side wall above cooking surface.

Electrical outlet - standard 3 prong 120 VAC. Allow for shut off valve at gas outlet. Island peninsula installations require a 10" minimum clearance from back of range to a combustible surface. No side wall above cooking surface.

G E Location of gas and electrical supply

#### overall depth

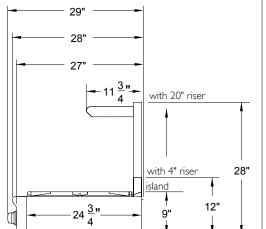

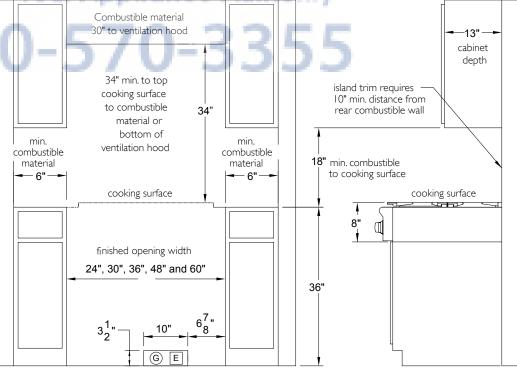

N= Natural Gas Must provide N or L after model for type of gas needed.
L = LP Gas Example: AROFG-30L, represents unit to be built for LP gas.
Must specify elevation if over 1,000 ft. when ordering.



# LEGEND SERIES SLIDE-IN COOKTOPS









24''

| 3 | O' | , |  |
|---|----|---|--|
|   |    |   |  |


| 24" SLIDE IN 4 BURNER COOKTOP |  |  |  |  |
|-------------------------------|--|--|--|--|
| Surface Burner Rating         | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |  |  |  |
| Total Gas Connection Rating   | ARSCT-244 56,000 BTU 4 burners                     |  |  |  |
| per model #                   |  |  |  |  |
| Gas Supply                    | 7" W.C. Natural, 11" W.C. Propane                  |  |  |  |
| Electrical Supply             | 120 VAC 15 AMP 60 Hz Single Phase                  |  |  |  |
| Shipping Weight               | 80 Lbs   |  |  |  |



| 30" SLIDE IN 4 BURNER COOKTOP |  |  |  |  |
|-------------------------------|--|--|--|--|
| Surface Burner Rating         | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |  |  |  |
| Total Gas Connection Rating   | ARSCT-304 56,000 BTU 4 burners                     |  |  |  |
| per model #                   |  |  |  |  |
| Gas Supply                    | 7" W.C. Natural, 11" W.C. Propane                  |  |  |  |
| Electrical Supply             | 120 VAC 15 AMP 60 Hz Single Phase                  |  |  |  |
| Shipping Weight               | 99.5 Lbs   |  |  |  |



| 36" SLIDE IN COOKTOPS       |  |
|-----------------------------|--|
| Surface Burner Rating       | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |
| Total Gas Connection Rating | ARSCT-366 86,000 BTU 6 burners                     |
| per model #                 | ARSCT-364GD 76,000 BTU 4 burners and griddle       |
|                             | ARSCT-364GR 74,000 BTU 4 burners and grill         |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane                  |
| Electrical Supply           | 120 VAC 15 AMP 60 Hz Single Phase                  |
| Shipping Weight             | 121.5 Lbs  |

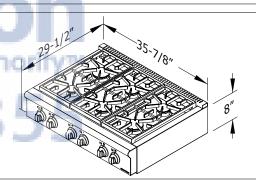

| ACCESSORIES                 | 24"           | 30"           | 36"             | 48"             | 60"             |
|-----------------------------|---------------|---------------|-----------------|-----------------|-----------------|
| Island Back (Standard)      | ARR-24SIB-L   | ARR-30SIB-L   | ARR-36SIB-L     | ARR-48SIB-L     | ARR-60SIB-L     |
| Island Back (Welded)        | ARR-24IB-L    | ARR-30IB-L    | ARR-36IB-L      | ARR-48IB-L      | ARR-60IB-L      |
| 4'' Stub Back               | ARR-244SB-L   | ARR-304SB-L   | ARR-364SB-L     | ARR-484SB-L     | ARR-604SB-L     |
| 20" High Back with Shelf    | ARR-2421HBS-L | ARR-3021HBS-L | ARR-3621HBS-L   | ARR-4821HBS-L   | ARR-6021HBS     |
| 12'' Grill Cover            | N/A           | N/A           | ARR-GRCOV12-L   | ARR-GRCOV12-L   | ARR-GRCOV12-L   |
| 12'' Griddle Cover          | N/A           | N/A           | ARR-GDCOV12-S-L | ARR-GDCOV12-S-L | ARR-GDCOV12-S-L |
| 24'' Griddle Cover          | N/A           | N/A           | N/A             | ARR-GDCOV24-S-L | ARR-GDCOV24-S-L |
| 12" Removable Griddle Plate | N/A           | N/A           | ARR-PGP12-L     | ARR-PGP12-L     | ARR-PGP12-L     |
| 24" Removable Griddle Plate | N/A           | N/A           | ARR-PGP24-L     | ARR-PGP24-L     | ARR-PGP24-L     |
| Cutting Board               | ARR-CUTB-12-L | ARR-CUTB-12-L | ARR-CUTB-12-L   | ARR-CUTB-12-L   | ARR-CUTB-12-L   |
| Wok Adapter                 | ARR-WOK-L     | ARR-WOK-L     | ARR-WOK-L       | ARR-WOK-L       | ARR-WOK-L       |

N= Natural Gas
 L = LP Gas
 Must provide N or L after model for type of gas needed.
 Example: AROFG-30L, represents unit to be built for LP gas.



# LEGEND SERIES SLIDE-IN COOKTOPS







48''

| 1 | )'  | , |
|---|-----|---|
| h | . ) |   |
|   |     |   |

| 48" SLIDE-IN COOKTOPS       |                                   |  |                              |  |  |
|-----------------------------|-----------------------------------|--|------------------------------|--|--|
| Surface Burner Rating       | 17,000 BTU (lg) -                 | 17,000 BTU (Ig) - 13,000 BTU (md) - 9,000 BTU (sm) |                              |  |  |
| Grill Burner Rating         | 18,000 BTU                        |  |                              |  |  |
| Total Gas Connection Rating | ARSCT-486GD                       | 106,000 BTU  | 6 burners and griddle        |  |  |
| per model #                 | ARSCT-486GR                       | 104,000 BTU  | 6 burners and grill          |  |  |
|                             | ARSCT-484GDGR                     | 94,000 BTU   | 4 burners, grill and griddle |  |  |
|                             | ARSCT-4842GD                      | 96,000 BTU   | 4 burners and double griddle |  |  |
|                             | ARSCT-484X2GR                     | 92,000 BTU   | 4 burners and double grill   |  |  |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane |  |                              |  |  |
| Electrical Supply           | 120 VAC 15 AMP 60 Hz Single Phase |  |                              |  |  |
| Shipping Weight             | 170.5 Lbs                         | _0   |                              |  |  |

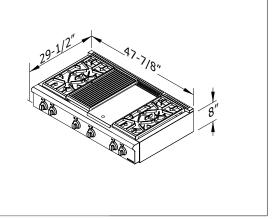

| 60" SLIDE-IN COOKTOPS       |  |  |  |  |  |
|-----------------------------|--|--|--|--|--|
| Surface Burner Rating       | 9,000 BTU (sm), 13,000 BTU (md), 17,000 BTU (lg)         |  |  |  |  |
| Total Gas Connection Rating | ARSCT-6062GD 126,000 BTU 6 burners and double griddle    |  |  |  |  |
| per model #                 | ARSCT-606X2GR   122,000 BTU   6 burners and double grill |  |  |  |  |
|                             | ARSCT-606GDGR 124,000 BTU 6 burners, griddle and grill   |  |  |  |  |
| Gas Supply                  | 7" W.C. Natural, 11" W.C. Propane                        |  |  |  |  |
| Gas Requirements            | 120 VAC 15 AMP 60 Hz Single Phase                        |  |  |  |  |
| Shipping Weight             | 212.5 Lbs  |  |  |  |  |

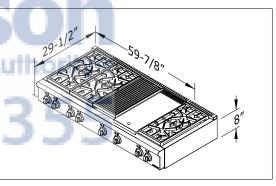

| ACCESSORIES                 | 24"           | 30"           | 36"             | 48"             | 60"             |
|-----------------------------|---------------|---------------|-----------------|-----------------|-----------------|
| Island Back (Standard)      | ARR-24SIB-L   | ARR-30SIB-L   | ARR-36SIB-L     | ARR-48SIB-L     | ARR-60SIB-L     |
| Island Back (Welded)        | ARR-24IB-L    | ARR-30IB-L    | ARR-36IB-L      | ARR-48IB-L      | ARR-60IB-L      |
| 4'' Stub Back               | ARR-244SB-L   | ARR-304SB-L   | ARR-364SB-L     | ARR-484SB-L     | ARR-604SB-L     |
| 20" High Back with Shelf    | ARR-2421HBS-L | ARR-3021HBS-L | ARR-3621HBS-L   | ARR-4821HBS-L   | ARR-6021HBS     |
| 12" Grill Cover             | N/A           | N/A           | ARR-GRCOV12-L   | ARR-GRCOV12-L   | ARR-GRCOV12-L   |
| 12" Griddle Cover           | N/A           | N/A           | ARR-GDCOV12-S-L | ARR-GDCOV12-S-L | ARR-GDCOV12-S-L |
| 24" Griddle Cover           | N/A           | N/A           | N/A             | ARR-GDCOV24-S-L | ARR-GDCOV24-S-L |
| 12" Removable Griddle Plate | N/A           | N/A           | ARR-PGP12-L     | ARR-PGP12-L     | ARR-PGP12-L     |
| 24" Removable Griddle Plate | N/A           | N/A           | ARR-PGP24-L     | ARR-PGP24-L     | ARR-PGP24-L     |
| Cutting Board               | ARR-CUTB-12-L | ARR-CUTB-12-L | ARR-CUTB-12-L   | ARR-CUTB-12-L   | ARR-CUTB-12-L   |
| Wok Adapter                 | ARR-WOK-L     | ARR-WOK-L     | ARR-WOK-L       | ARR-WOK-L       | ARR-WOK-L       |

N= Natural Gas
 L= LP Gas
 Must provide N or L after model for type of gas needed.
 Example: AROFG-30L, represents unit to be built for LP gas.





# LEGEND SERIES SLIDE-IN STEP-UP COOKTOPS









24" 30" 36"


| 24" SLIDE-IN STEP-UP 4 BURNER COOKTOP |  |
|---------------------------------------|--|
| Surface Burner Rating                 | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |
| Total Gas Connection Rating           | ARSCT-244SU 56,000 BTU 4 burners                   |
| Gas Supply                            | 7" W.C. Natural, 11" W.C. Propane                  |
| Electrical Supply                     | 120 VAC 15 AMP 60 Hz Single Phase                  |
| Shipping Weight                       | 87 Lbs   |



| 30" SLIDE-IN STEP-UP 4 BURNER COOKTOP |  |
|---------------------------------------|--|
| Surface Burner Rating                 | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm) |
| Total Gas Connection Rating           | ARSCT-304SU 56,000 BTU 4 burners                   |
| Gas Supply                            | 7" W.C. Natural, 11" W.C. Propane                  |
| Electrical Supply                     | 120 VAC 15 AMP 60 Hz Single Phase                  |
| Shipping Weight                       | 107 Lbs  |



| 36" SLIDE-IN STEP-UP 6 BURNER COOKTOP |   |    |
|---------------------------------------|---|----|
| Surface Burner Rating                 | 17,000 BTU (lg) - 13,000 BTU (md) - 9,000 BTU (sm)            |    |
| Total Gas Connection Rating           | ARS <mark>CT-36</mark> 6SU <mark>86,</mark> 000 BTU 6 burners | i  |
| Gas Supply                            | 7" W.C. Natural, 11" W.C. Propane                             |    |
| Electrical Supply                     | I 20 VAC 15 AMP 60 Hz Single Phase                            |    |
| Shipping Weight                       | 131 Lbs   | 0. |

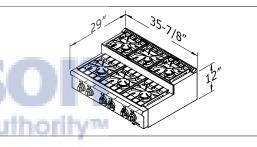



#### SLIDE-IN STEP-UP COOKTOPS CUT-OUT DIMENSIONS

Island or peninsula installations - 10" min. clearance from back of range to combustible surface. Island trim 0" clearance to non-combustible surface. No side wall above cooking surface.

Electrical outlet - standard 3 prong 120 VAC. Allow for shut off valve at gas outlet. Island peninsula installations require a 10" minimum clearance from back of range to a combustible surface. No side wall above cooking surface.

© ■ Location of gas and electrical supply



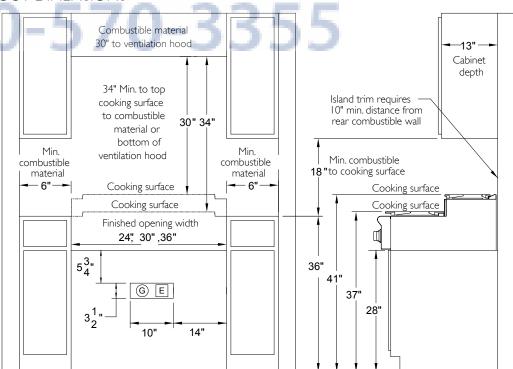

N= Natural Gas Must provide N or L after model for type of gas needed. L = LP Gas Example: AROFG-30L, represents unit to be built for LP gas.



## VILLA SERIES WARMING DRAWERS



27''



30"



36"

#### **FEATURES**

- Electronic controls hidden behind the front panel are kitchen-design friendly
- One-touch controls presets, adjustable drawer temperatures and on-times
- Easy-to-read digital display of time and temperature simplifies programming
- Automatic shut-off at end of cycle helps save energy
- Adjust, Add and Remove function keys make memory programming easy
- Sabbath mode for up to 84 hours of hands-free operation
- Four radiant heaters take the drawer from 70°F to 140°F in 4 minutes and to 190°F in 9 minutes
- Two convection fans hold the drawer at a uniform temperature to +/- I°F accuracy

- Drawer capacity is truly proportional to product width larger models have a larger drawer (30" and 36" only)
- Best quality Triple-Play cabinet slides keeps the drawer from wobbling
- Low sides on drawer make loading and unloading easy and clean-up a snap


# **SPECIFICATIONS**

- Computer control of time and temperature
- Standard kitchen cabinets widths
- Three-slides on the drawer for increased stability
- Timed, Continuous and Sabbath modes
- Four infrared heaters, two convection fans standard in all models
- Design protected under U.S. Patent 7,166,821

# Your Appliance Authority™

# WARMING DRAWER CUT OUT DIMENSIONS


| WD<br>WIDTH | "A"<br>DIMENSION |
|-------------|------------------|
| 26-7/8"     | 25-5/8"          |
| 29-7/8"     | 28-5/8"          |
| 35-7/8"     | 34-5/8"          |

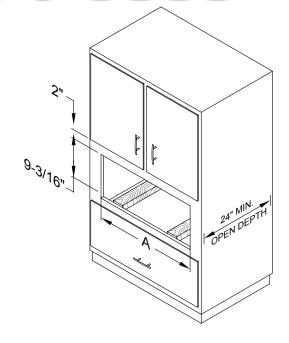




# VILLA SERIES WARMING DRAWERS

| 27" WARMING DRAWER      |                                   |
|-------------------------|-----------------------------------|
| Overall Drawer Capacity | 1.4 CU. FT.                       |
| Drawer Dimensions       | 19 -1/2"W × 6" D × 20 -1/2" H     |
| Heating Element         | ARR-27WD - 800 watts              |
| Convection Fans         | 2                                 |
| Temperature Range       | 80° F to 195° F                   |
| Operating Modes         | Timed, Continuous, Sabbath        |
| Electrical Supply       | 120 VAC 15 AMP 60 Hz Single Phase |
| Shipping Weight         | 75 Lbs                            |

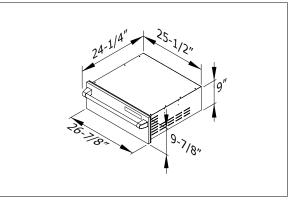

| 30" WARMING DRAWER      |                                   |
|-------------------------|-----------------------------------|
| Overall Drawer Capacity | I.6 CU. FT.                       |
| Drawer Dimensions       | 22 - I/2"W × 6" D × 20 - I/2" H   |
| Heating Element         | ARR-30WD - 800 watts              |
| Convection Fans         | 2                                 |
| Temperature Range       | 80° F to 195° F                   |
| Operating Modes         | Timed, Continuous, Sabbath        |
| Electrical Supply       | 120 VAC 15 AMP 60 Hz Single Phase |
| Shipping Weight         | 75 Lbs                            |

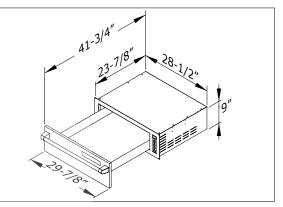

| 36" WARMING DRAWER      |                                   |
|-------------------------|-----------------------------------|
| Overall Drawer Capacity | 2.0 CU. FT.                       |
| Drawer Dimensions       | 28 - I/2"W × 6" D × 20 - I/2" H   |
| Heating Element         | ARR-36WD - 800 watts              |
| Convection Fans         | 2000 F 70 0                       |
| Temperature Range       | 80° F to 195° F                   |
| Heating Modes           | Timed, Continuous, Sabbath        |
| Electrical Supply       | 120 VAC 15 AMP 60 Hz Single Phase |
| Shipping Weight         | 75 Lbs                            |

