

315W/O



FEATURES

Discreet interior lighting

Single temperature zone with range from 45° F to 55° F

UV-resistant glass door protects against premature wine aging

Overlay design accepts cabinetry panels of all kinds

Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use

Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory

ACCESSORIES

3" stainless steel filler strip

Stainless steel pro handles

Accessories are available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES

PRO




TUBULAR



PRODUCT SPECIFICATIONS


Model	315W/O
Dimensions	15 1/8"W x 34 1/16"H x 24"D
Door Clearance	16 5/8"
Weight	118 lb
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit

INTERIOR VIEW

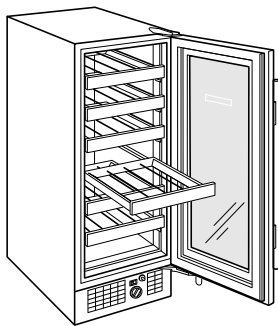

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

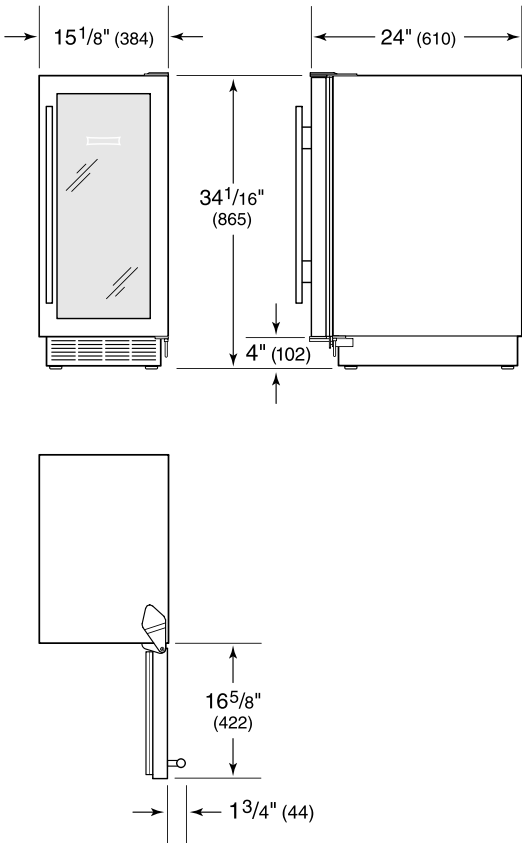

STANDARD INSTALLATION

