


Product and Cut-out Dimensions

K1911Vi / K1901Vi

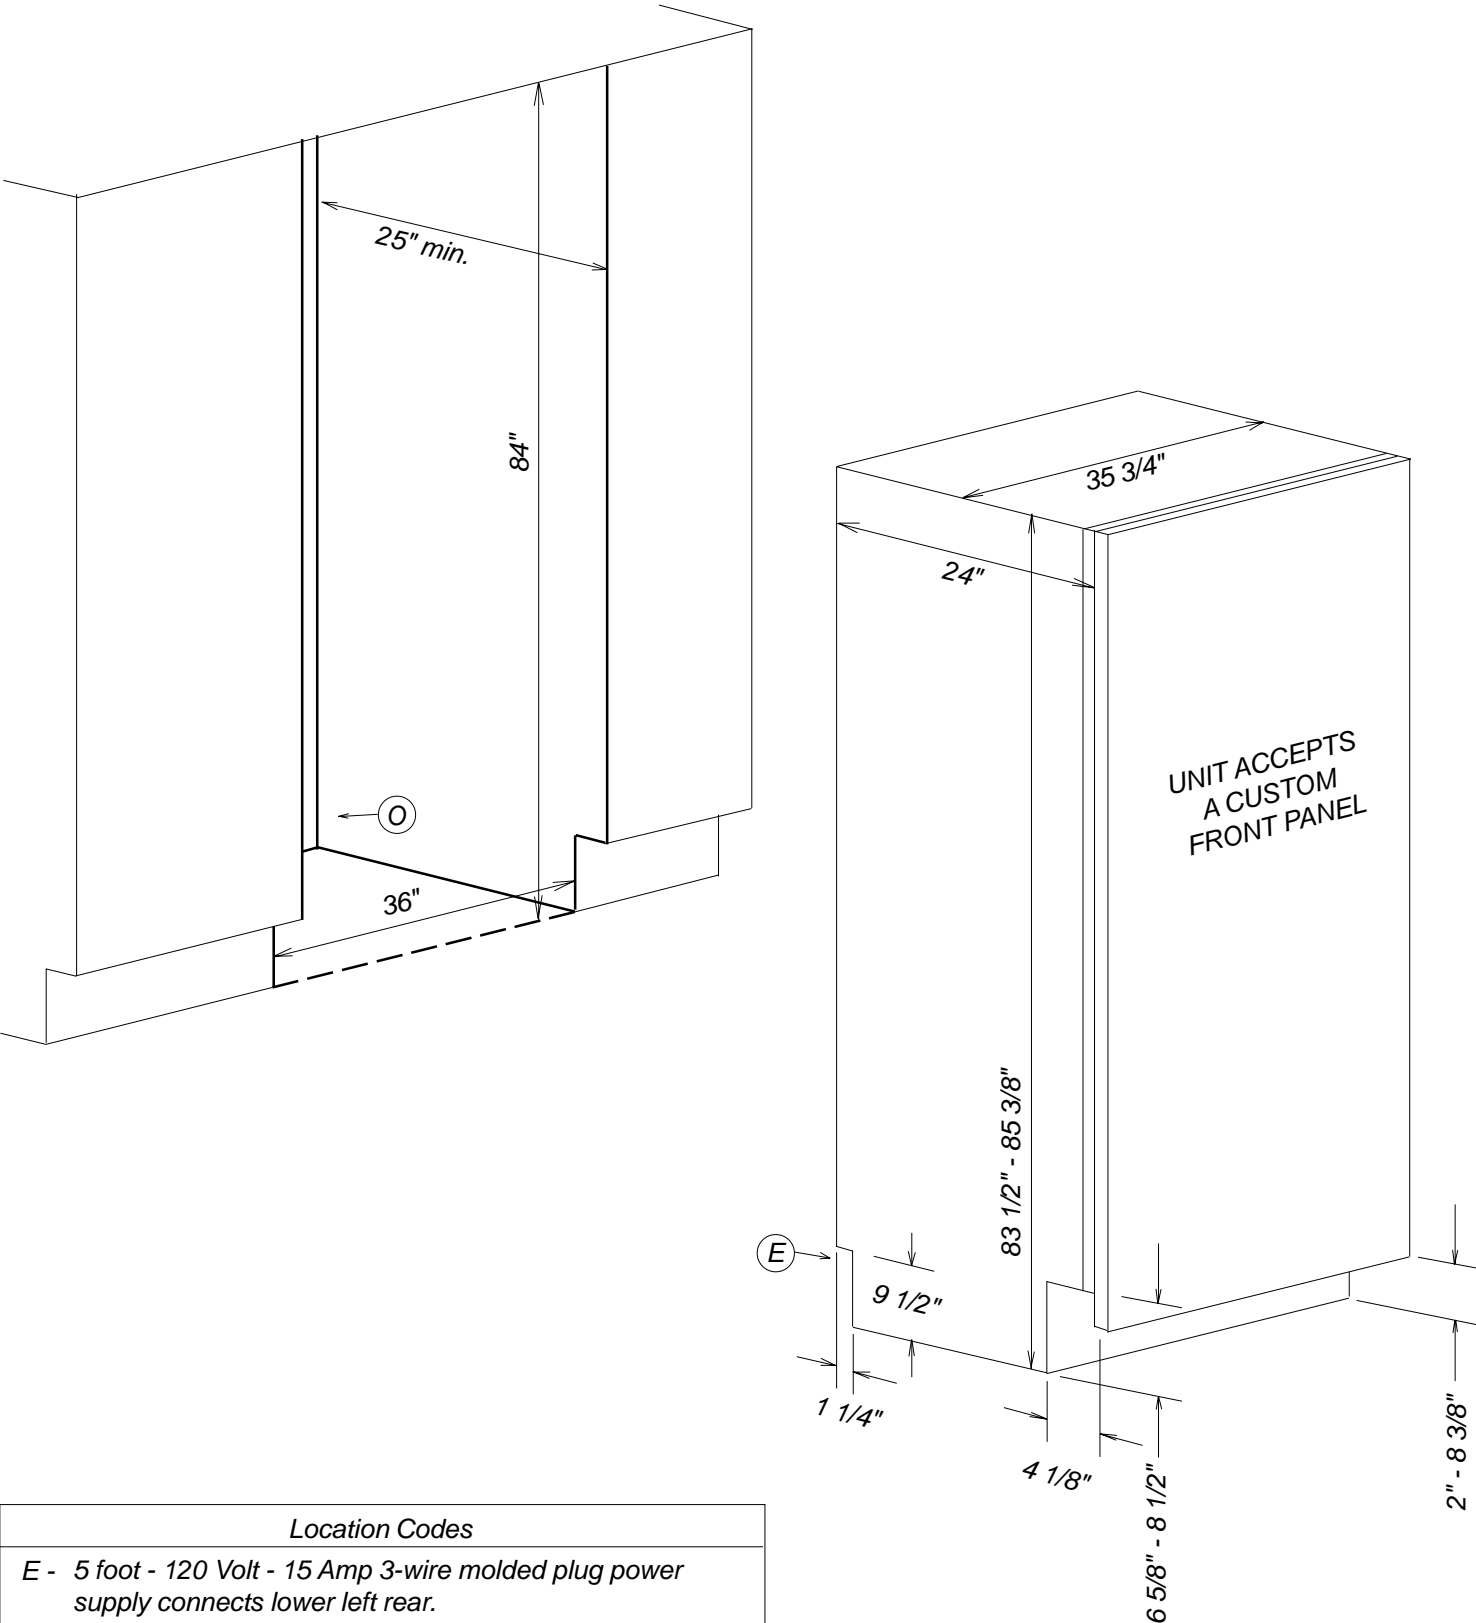

| Location Codes |
|--|
| E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear. |
| O - Standard NEMA 5-15 Outlet - locate less than 9" above finished floor |
| Notes |
| • All Installations must be done in accordance with local codes |

NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 010707

Front Panel Information


Fully Integrated Model



Custom Panel Installations

These units do not come equipped with a front panel. They are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the panels to align with the surrounding cabinets.

Panel size is determined in the following manner:

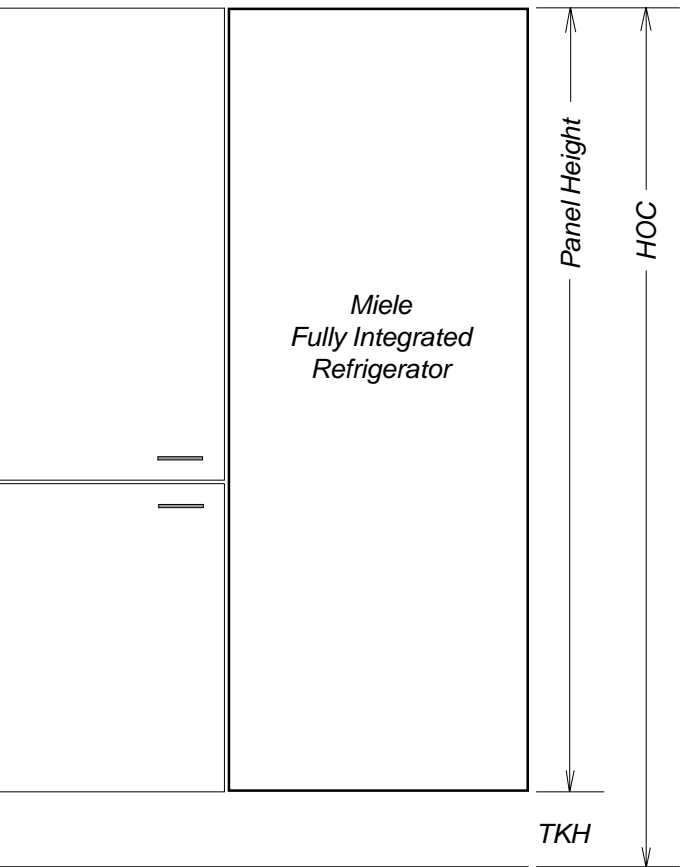

Width: 35 3/4" in all cases

Thickness: Minumum 3/4" outside frame

Height: Determined using the following calculation:

$$\text{Panel Height} = \text{HOC} - \text{TKH}$$


HOC = Total height of cabinet or side panel
TKH = Toe-kick height

Note: Panel may extend above unit.
This is **not** considered in height calculation

Maximum panel weight: 200 Pounds

Panel Notes

If the adjoining cabinets are taller than the height of machine (HOM) - the front panel may be extended accordingly. Simply maintain the toekick height and extend the panel the needed distance.

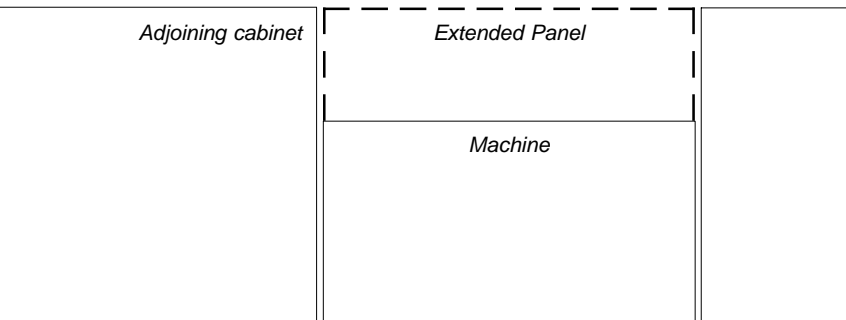


Front Panel Information

Hinging Details




90° Door

Thickness options

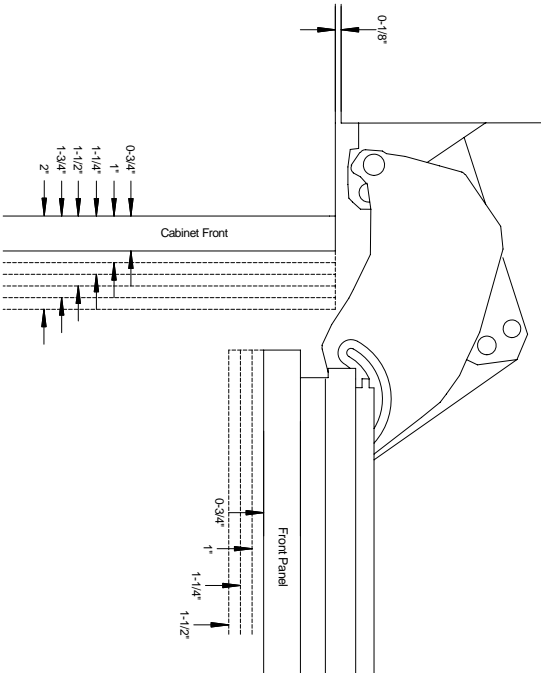


Door Swing

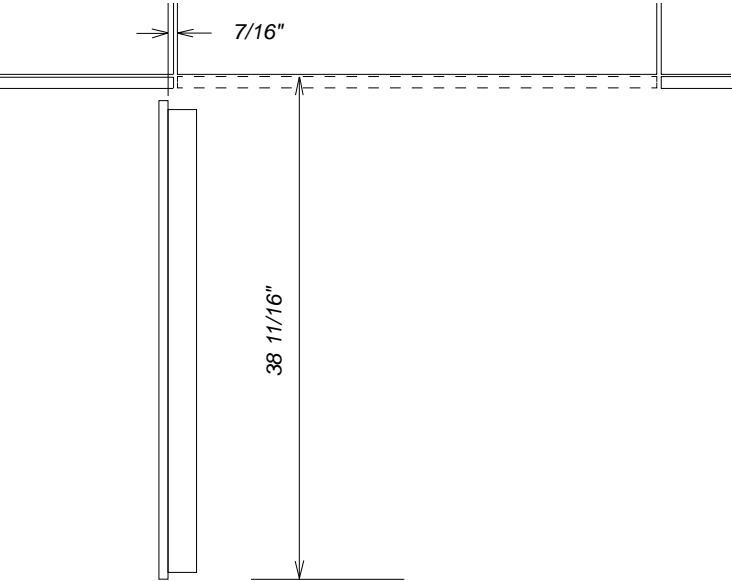


NOTE: Additional space needed depending on thickness of front panels and handle used

115° Door

Thickness options

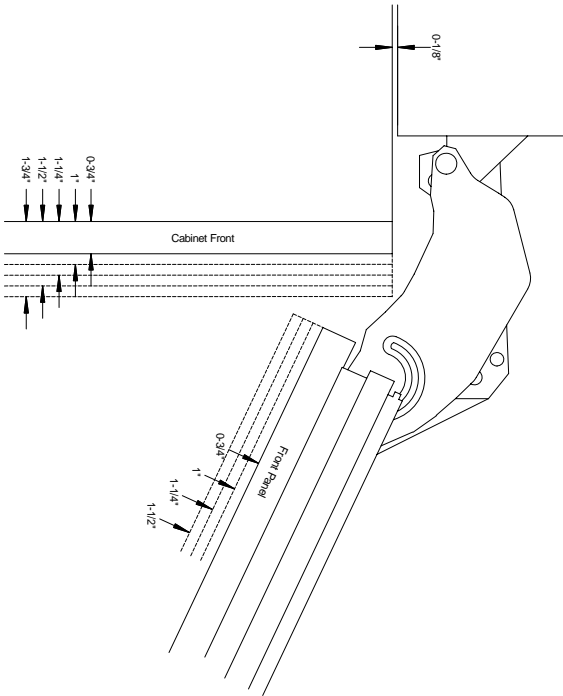

Door Swing

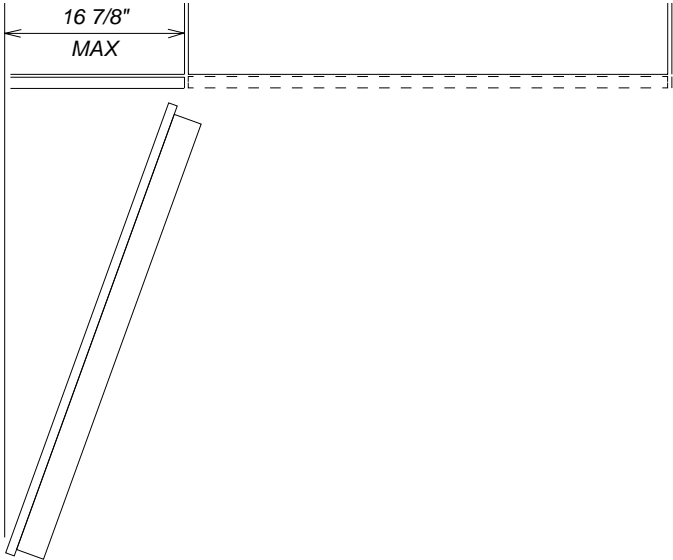

NOTE: Additional space needed depending on thickness of front panels and handle used