



LED lighting modules are tested in cooking environments to ensure long life without dimming.

Heat Sentry™ detects excessive heat and adjusts blower automatically.

Works with optional Universal Make-Up Air Dampers

Black stainless finish resists fingerprints.

Vertical or Horizontal ducting options.

Model Numbers:

WC53I30BLS

WC53I36BLS



Hybrid baffle filters provide ultra-efficient grease removal with superior air flow.



Three-speed electronic control includes 10-minute delay-off and filter clean reminder.



Brilliant three-level LED modules illuminate the cooktop. 3-year warranty.

Hood Sizes

Width	30", 36"
Depth	20"

Finish

Stocked	Black Stainless Steel
Special Order	Not Available

Features

Lighting Type	LED (Color Temp—3000K)
Number of Modules	2
Lighting Levels	3
Lighting Modules Included	Yes
Control Type	3-Speed Electronic PB with LCD
Control Features	Heat Sentry™, Delay Off, Filter Clean Reminder
Remote Control	Not Available
Filter Type	Hybrid Baffle Filter
Non-ducted Capability	Yes

Hood Blower Included (WC53I)

Internal	Centrifugal Blower
Blower CFM Low/High	200/550**
Sones Low/High	1.5/12


Accessories

10'-11' Flue Extension (Ducted)	AEWC53SB
Non-duct Kit	ANKWC53*
CFM Reducer Kit	ARP6
Universal MUA Damper	MD6TU, MD8TU, MD10TU (Requires Fresh Air Inlet)
Fresh Air Inlet	641FA, 643FA, 610FA

Installation Requirements

Amps @ 120V: Internal Blower	3.9
Electrical Connection	Plug-In
Duct Size: Internal Blower	6" RD or 3-1/4" x 10"
Duct Direction	Vertical or Horizontal
Backdraft Damper	Included

*Available January 2018

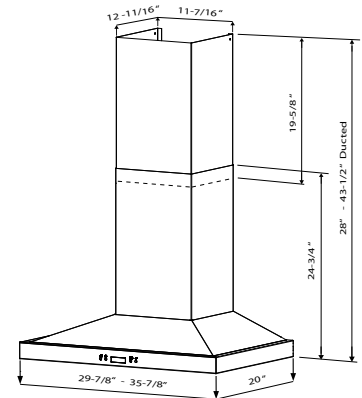

Install hood so that the bottom of the unit is 24" to 30" above the cooking surface. Mounting height may be affected by ceiling height.

Ducted telescopic flue accommodates ceiling heights from 8' to 9'. Flue extension for higher ceilings is also available.

**299 CFM max with ARP6 reducer plate option.

For more details see the product specifications sheet found at www.BESTRangeHoods.com

