accucold

PTHC65G



36" x 23.63" x 23.5" (H x W x D)

Single chamber passive heating blanket warmer with glass door, stainless steel interior and exterior, digital thermostat, and lock

Highlights:

Designed and assembled in the USA

No internal fans or moving parts ensure silent, safe, and efficient operation

Stainless steel interior for durable use and easy cleaning

Product Features:


90 to 140ºF temperature range	Designed and set to keep blankets warm in hospitals, medical and physical therapy offices, spas, and other facilities
Passive heating	Fixed heaters located at the bottom of the cabinet with no fans or moving parts to minimize lint buildup for safer, more efficient use
Digital thermostat	Electronic controls are conveniently located externally for easy temperature adjustment
Electronic readout	Large LED temperature display ensures your staff can easily monitor the interior temperature
Silent operation	No moving parts to ensure a quiet performance
Double pane tempered glass door	Heat-safe glass door offers a full view of stored contents, with a stainless steel door trim to highlight the interior
Professional handle	Stainless steel handle completes the professional look
Stainless steel interior	Interior walls are constructed from stainless steel to ensure lasting durability and easy cleaning
Cantilevered shelving system	Three easily adjustable chrome shelves to accommodate virtually any size

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799 info@summitappliance.com **www.summitappliance.com**

accucold

PTHC65G Specifications:

Overview	
Nominal Height	36.0" (91 cm)
Height of Cabinet	36.0" (91 cm)
Nominal Width	24.0" (61 cm)
Width	23.63" (60 cm)
Nominal Depth	24.0" (61 cm)
Depth	23.5" (60 cm)
Depth with Handle	25.38" (64 cm)
Depth with door at 90°	46.0" (117 cm)
Capacity	4.57 cu.ft. (129 L)
Door	Glass
Cabinet	Stainless Steel
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Amps	5.5
Voltage/Frequency	115 V AC/60 Hz
Weight	90.0 lbs. (41 kg)
Parts & Labor Warranty	1 Year
UPC	761101066110
Warming Cabinet	
Door Swing	RHD
Reversible	Factory Reversible
Adjustable Shelves	Yes
Shelf Type	Chrome
Shelf Qty	3
Thermostat Type	Digital
Interior Height	22.5" (57 cm)
Interior Width	19.38" (49 cm)
Interior Depth	17.38" (44 cm)
Level Legs	4
Dolly	Optional
Temperature Range	90 to 140ºF

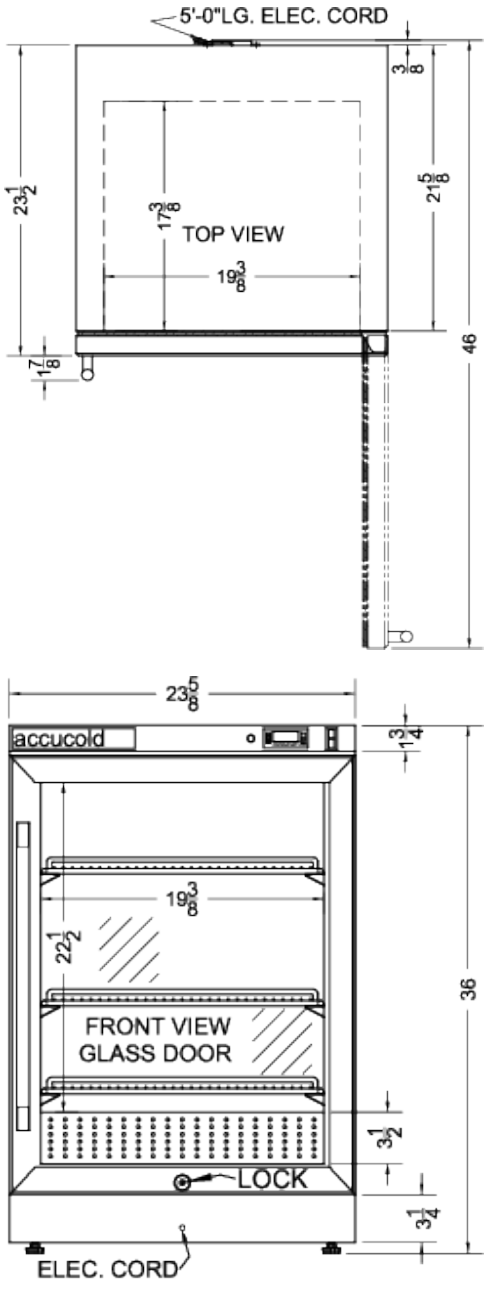

Puretherm Warming Cabinet

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799 info@summitappliance.com **www.summitappliance.com**