

DESCRIPTION

- Metal construction with various finishes identified by suffix ٠
- Flexible supply lines with 3/8" compression fittings •
- Includes metal pop-up waste assembly

OPERATION


- Lever style handle
- Temperature controlled by 100° arc of handle travel
- **FLOW**
- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi CARTRIDGE
- 1255[™] Duralast[™] cartridge for Single-Handle Faucets

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1, NSF 61/9 • and all applicable requirements referenced therein
- Contains no more than 0.25% weighted average lead content • Third party certified to comply with WaterSense[®] High Efficiency •
- **Bathroom Sink Faucet Specification**
- Complies with California Proposition 65 and with • the Federal Safe Drinking Water Act
- ADA 🛃 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




Specifications

RIZON[™] **Single-Handle Lavatory Faucet**

Model: 6900

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/8" MIN. DIA.



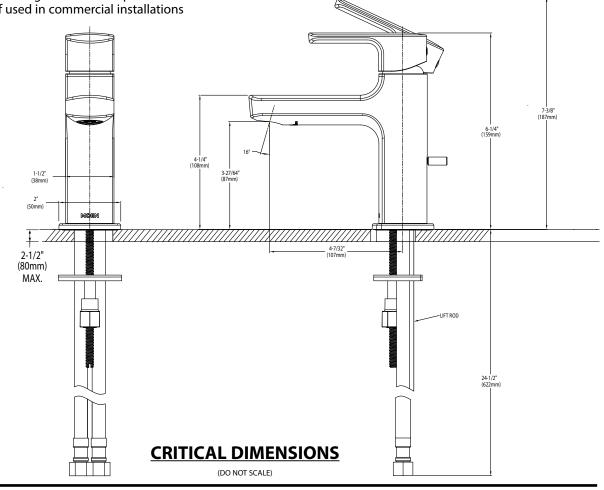

2/04/2012