



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- High arc spout provides the height and reach to fill or clean large pots while the pulldown feature provides the infinite maneuverability for cleaning or rinsing
- Hydrolock® quick connect system
- Metal construction with 2 finishes
- Pulldown spray with 68" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

## OPERATION

- Two handle lever
- When filling a vessel outside of the sink, the pause feature conveniently stops the flow of water as the wand passes over the countertop
- Convenient single-button actuation provides flexibility to switch from stream to spray mode

## FLOW


- Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

## CARTRIDGE

- 1224 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials

## STANDARDS

- Third party certified to CSA B125 and ASME A112.18.1M and all applicable requirements therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow.

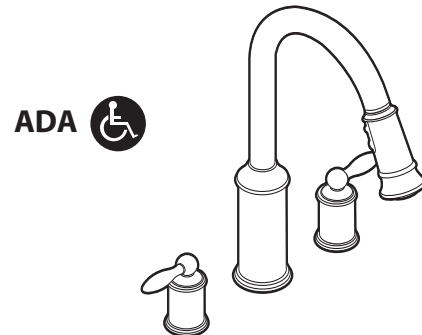


**Aberdeen™**  
**Two Handle High Arc Pull Down Kitchen Faucet**

**Models:** 7592C, 7592SL

**NOTE:** DESIGNED TO INSTALL THRU 3 HOLES 1-1/4" (32mm) MIN. DIA.

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

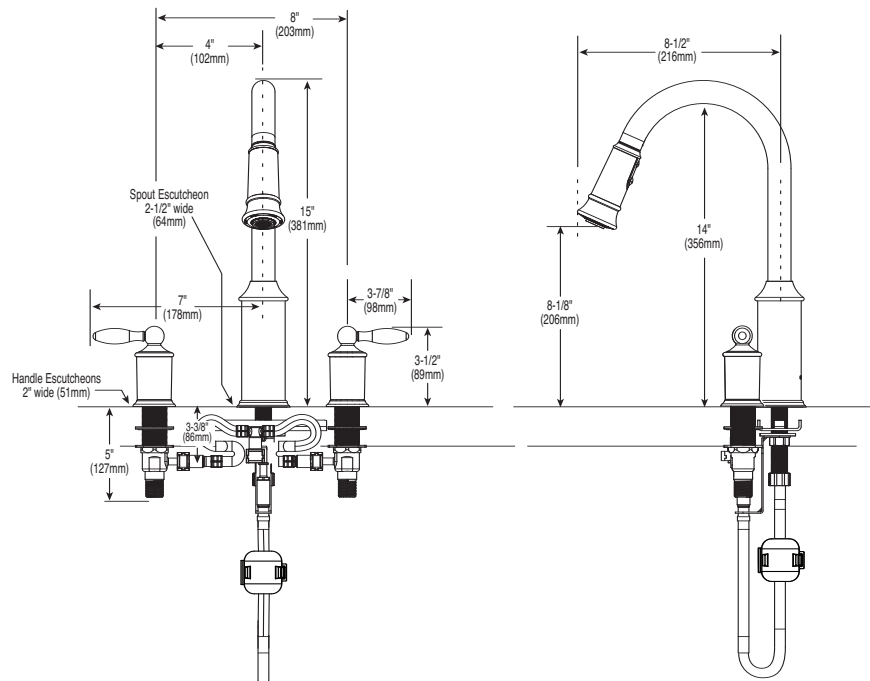

## CRITICAL DIMENSIONS

(DO NOT SCALE)

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

**www.moen.com**