

Buy it for looks. Buy it for life.®

## **FAUCET DESCRIPTION**

- Versatile, hands-free convenience in the kitchen
- Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle Powered by 6 AA batteries or optional AC power adapter
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Hydrolock® quick connect installation
- Pulldown spray with 68" braided hose Valve flexible supply lines with 3/8" compression fittings
- Spout uses push-fit hose connections
- High arc spout provides height and reach to fill or clean large oots while pull down wand provides the maneuverability for cleaning or rinsing

### **OPERATION**

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs of force
- Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

is limited to 2.0 gpm (7.6 L/min) at 60 psi

## CARTRIDGE

1255™ Duralast™ cartridge for Single-Handle Faucets


# **STANDARDS**

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and  $\stackrel{\cdot}{\text{with}}$  the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA (for lever handle

- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser 5 year warranty electronic operation defects to the original consumer purchaser 5 year warranty against leaks, drips, finish defects if used in commercial installations

- 1 year warranty against electronic operation defects if used in commercial installations

# Specifications




MotionSense™ **Single Handle High Arc Pulldown Kitchen Faucet** 

Models: 7594E series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.



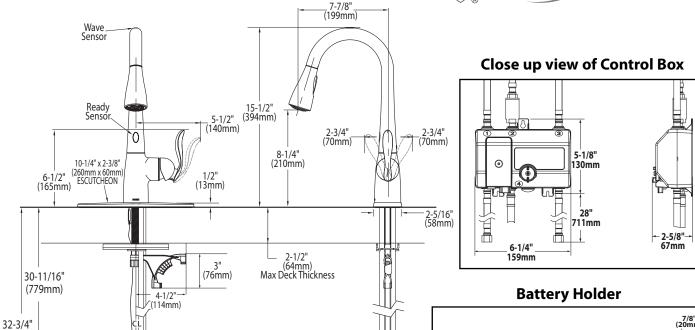

**CRITICAL DIMENSIONS** 

AC Power Adapter

(sold separately) 163712 36" Cord (914mm)

(DO NOT SCALE)

TO ORDER PARTS CALL: 1-800-BUY-MOEN www.moen.com

Battery Holder Cable 36" (914mm)

(127mm)

\_2-5/8"\_ (67mm)

(832mm)