MOEN®
COMMERCIAL

Specifications

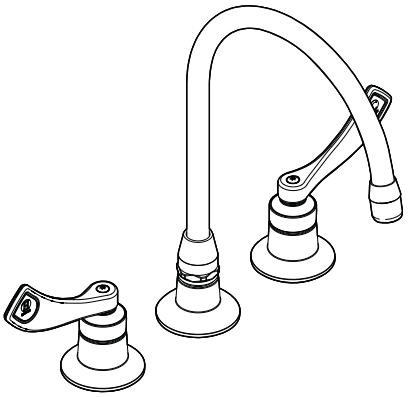

Two-Handle Lavatory Faucet with Spout

Model: 8225

NOTE: Designed to be installed through 3 holes - 1" min. dia.

FAUCET DESCRIPTION
- Brass construction with chrome plated finish
- 1/2" IPS connections
- 8" widespread

OPERATION
- Wristblade handles with hot and cold color indicators
- 1/4 turn to open (clockwise to close)
- Vandal resistant torx head screws

FLOW
- Aerator is limited to 2.2gpm max (8.34 min)
- Optional kit included with faucet - 2.0 gpm plain end laminar outlet with flow control device in spout

CARTRIDGE
- Brass shell, ceramic disc cartridge
- Nonmetallic/nonferrouse and ceramic material

STANDARDS
- Third party certified to meet CSA B-125, ASME A112.18.1M, ANSI A117.1 and all applicable specifications referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handles

WARRANTY
- Warranted for five years against material or manufacturing defects

AjMadison
Your Appliance Authority™
800-570-3355

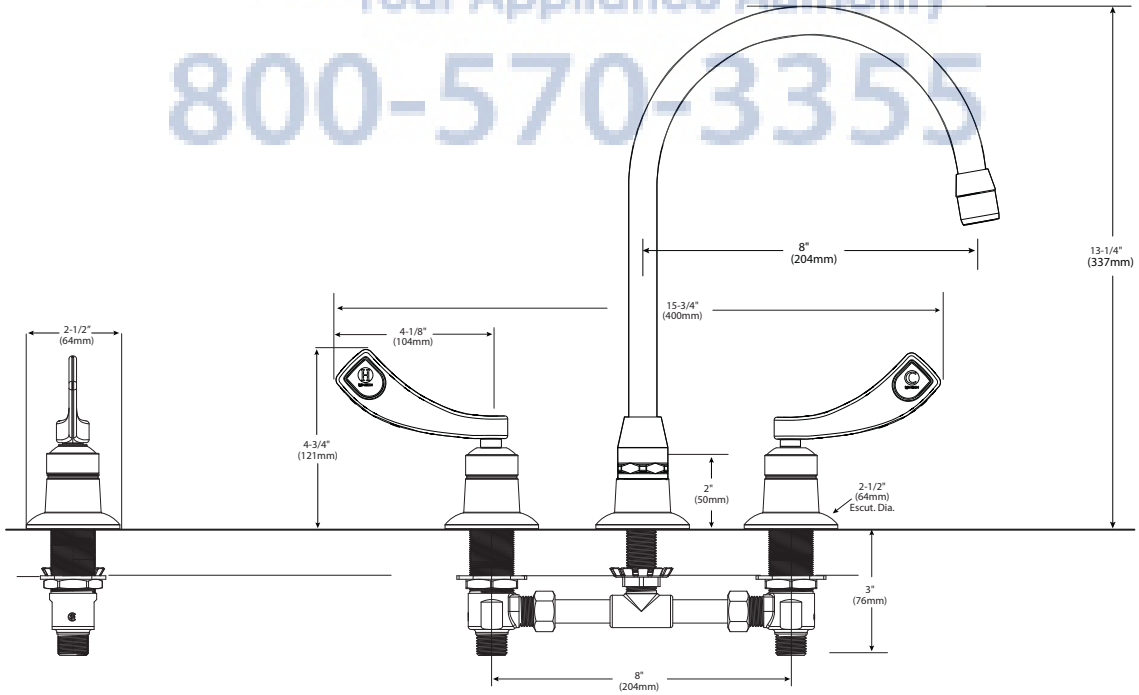

CRITICAL DIMENSIONS

(DO NOT SCALE)