

### FAUCET DESCRIPTION

- Brass construction with chrome plated finish
- 8" widespread
- 1/2" IPS connections

### OPERATION

- Wristblade handles with hot and cold color indicators
- Vandal resistant torx head screws


### FLOW

- Aerator is limited to 2.2gpm max (8.3L/min)
- Optional kit included with faucet - 2.0 gpm plain end laminar outlet with flow control device in spout

### CARTRIDGE


- Brass shell, ceramic disc cartridge
- 1/4 turn operation

### STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1, ICC A117.1 and all applicable specifications referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA  for lever handles

### WARRANTY

- Warranted for five years against material or manufacturing defects

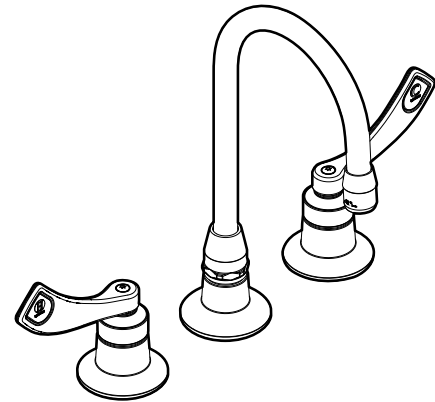


## Two-Handle Lavatory Faucet with Spout

**Model:** 8248

**NOTE:** Designed to be installed through 3 holes - 1" min. dia.

  
 Your Appliance Authority™  
 800-570-3355

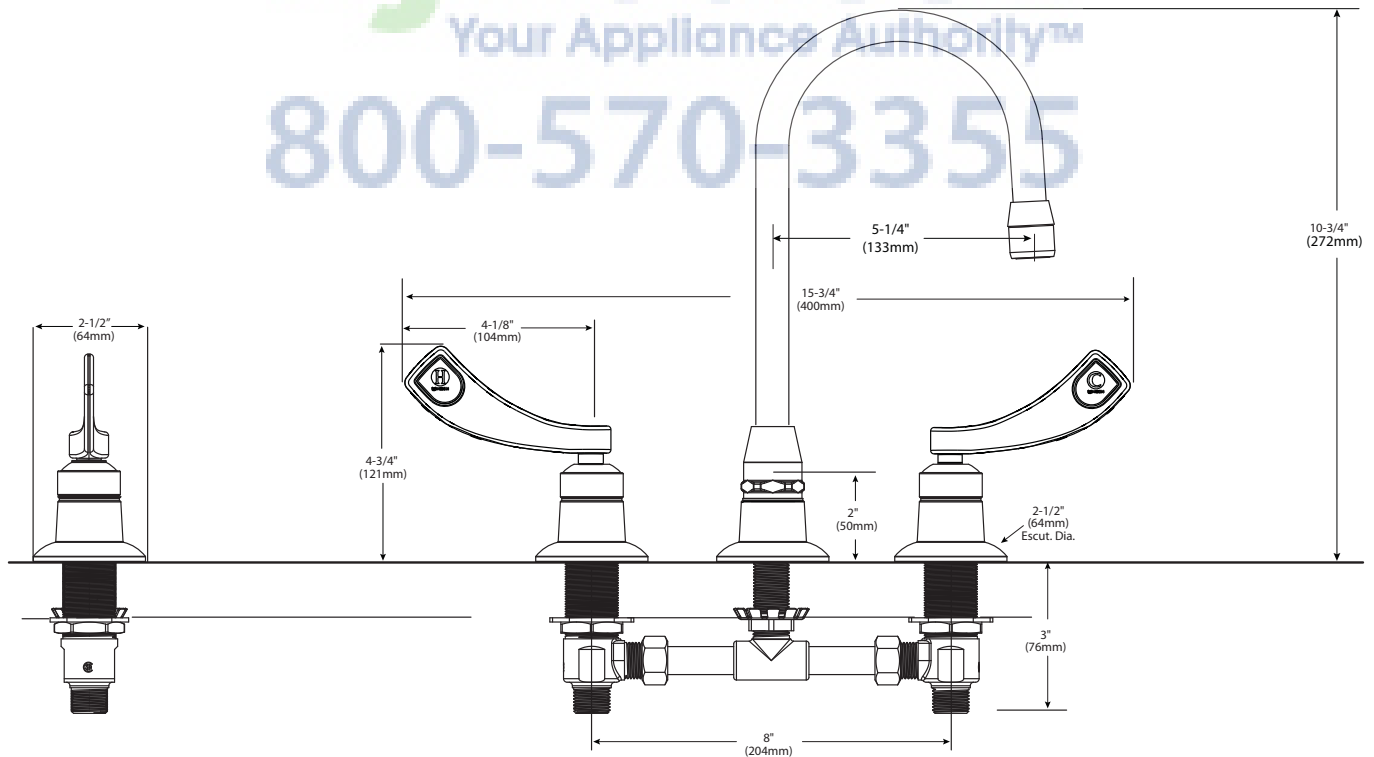

### CRITICAL DIMENSIONS

(DO NOT SCALE)