MOEN®
COMMERCIAL

Specifications

FAUCET DESCRIPTION
- Chrome plated brass construction
- Designed to be installed on 8" to 16" centers.
- Vandal resistant

OPERATION
- ADA compliant lever style handles with hot and cold water indicators
- Metering mechanism is adjustable, to allow the installer to compensate for supply line pressures of 20 to 80 psi
- Cycle time easily adjusted from 5 to 60 seconds
- Factory preset to automatically shut off after 10 seconds at 80 psi
- 1/2" IPS supply shanks

FLOW
- Vandal resistant aerator limits water discharge to a maximum of .25 gpc (.95 L/cycle)

CARTRIDGE
- 16352 cartridge design
- Nonmetallic and nonferrous material
- Self contained metering mechanism which is separate from the potable water supply

STANDARDS
- Third party certified to ASME A112.18.1/CSA B125.1, ICC-A117.1 and all applicable specifications referenced therein
- **ADA** for lever handles

WARRANTY
- Warranted for 5 years against material or manufacturing defects

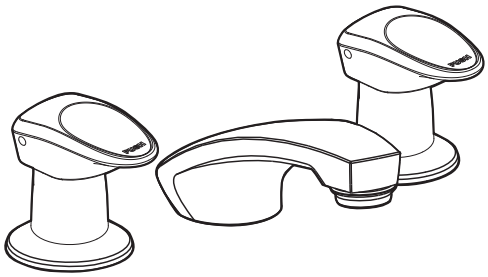

Widespread ADA Metering Lavatory Faucet

Model: 8889 (Chrome)

NOTE: Spout installs through 1" min. dia. hole
Valves install through 1-1/8" min. dia. hole

AjMadison
Your Appliance Authority™
800-570-3355

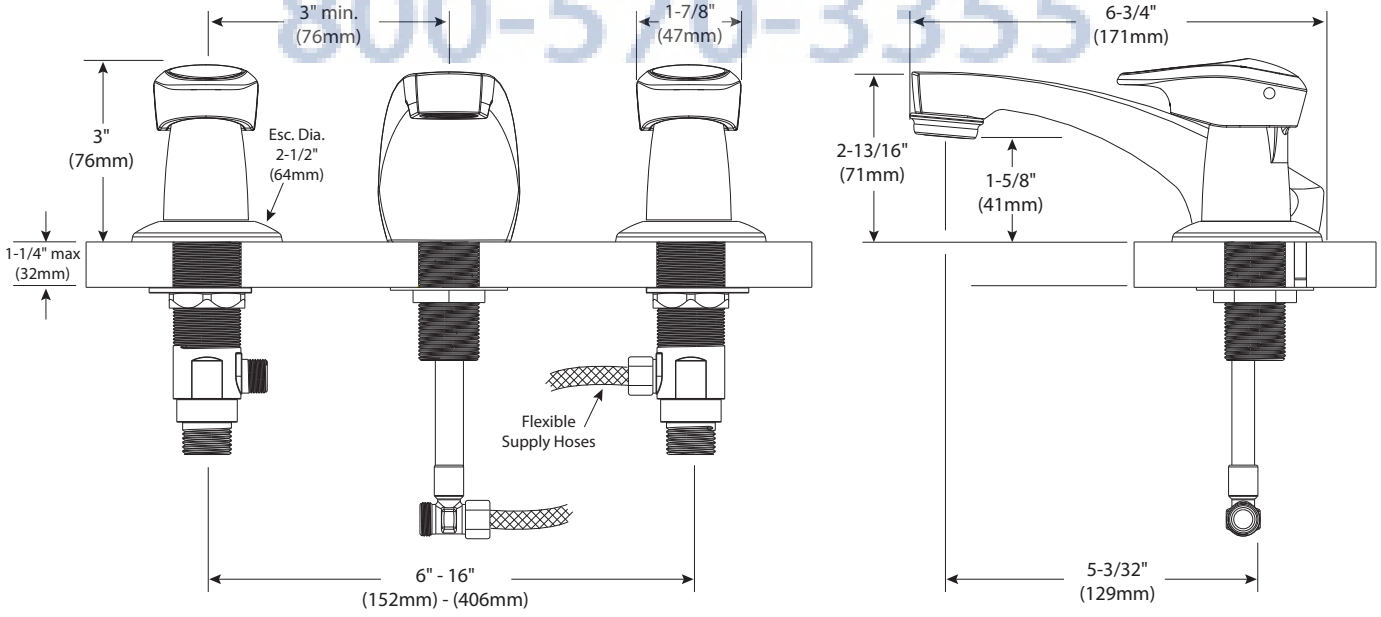

CRITICAL DIMENSIONS

(DO NOT SCALE)