

**FAUCET DESCRIPTION**

- Chrome plated metal construction
- 1/2" IPS connections
- Supplied with vandal resistant screws

**OPERATION**

- Wing style handles (chrome plated ABS) with hot and cold color indicators
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

**FLOW**

- Aerator is limited to 2.2 gpm max (8.3 L/min)

**CARTRIDGE**


- 1224 cartridge design
- Nonmetallic and stainless steel construction

**STANDARDS**

- Third party certified by IAPMO and CSA to meet CSA B-125 and ASME A112.18.1M, NSF 61/9, California Proposition 65, and all applicable specifications referenced therein and complies with the applicable requirements of ANSI A117.1

**WARRANTY**


- Warranted for 5 years against material or manufacturing defects



**Two-Handle Bar Faucet**

**Model: 8957**

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 2 HOLES, 1" MIN. DIA. AND 4" ON CENTER

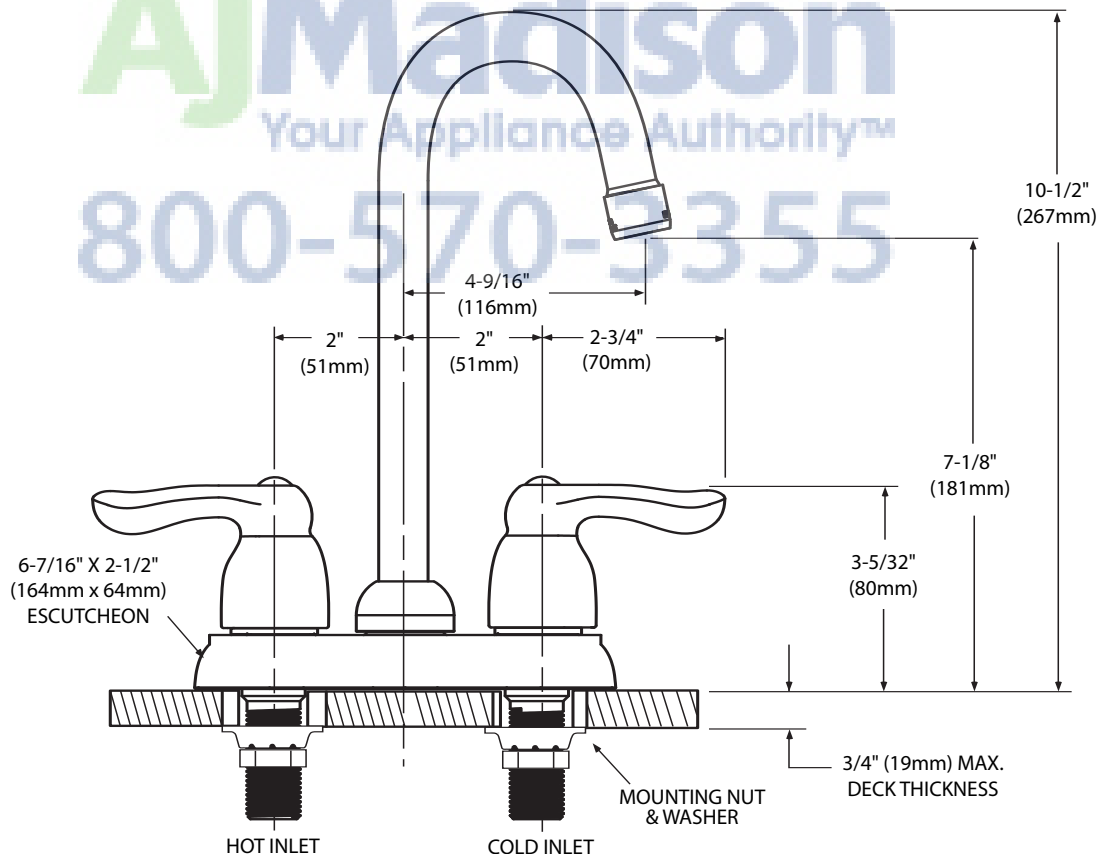

**CRITICAL DIMENSIONS**

(DO NOT SCALE)