

30" Marvel Standard Efficiency Single Zone Wine Cellar

Model # 8SWCE****

- MARVEL Prime™ Controls allow you to set cabinet temperature from 40°F to 65°F
- Thermal-efficient cabinet ensures optimum wine preservation and energy efficiency while maximizing capacity
- Tinted, UV-resistant dual pane glass door protects wine from damaging ultra-violet light
- White incandescent display lighting and midnight black interior
- Natural maple shelf fronts are stainable to match cabinetry
- Roller-glide shelf system
- Close Door Assist System™ gently and automatically closes door
- Sleek stainless steel door, designer handle and adjustable black toe grill
- Vibration Neutralization System™ protects wine from agitation
- 4" black adjustable toe kick



Ordering Details	
Stainless Frame Glass Door, Right Hinge	8SWCE-BS-G-R
Stainless Frame Glass Door, Left Hinge	8SWCE-BS-G-L
Stainless Frame Glass Door with Lock, Right Hinge	8SWCE-BS-G-LR
Stainless Frame Glass Door with Lock, Left Hinge	8SWCE-BS-G-LL
Black Frame Glass Door, Right Hinge	8SWCE-BB-G-R
Black Frame Glass Door, Left Hinge	8SWCE-BB-G-L
Panel Overlay Frame Glass Door, Integrated Right Hinge	8SWCE-BD-R
Panel Overlay Frame Glass Door, Integrated Left Hinge	8SWCE-BD-L

No panel installation kit required.

Storage Capacity

Up to 68 bottles total

Shelving Configuration

(6) 10-bottle rollout wine racks
(1) 8-bottle wine cradle

Product Dimensions

29⁷/₈" W x 33³/₄" minimum H x 24¹/₁₆" D
(including handle)


Finish/Door Options




Stainless Steel

Black

Wood Overlay
(Panel Ready)

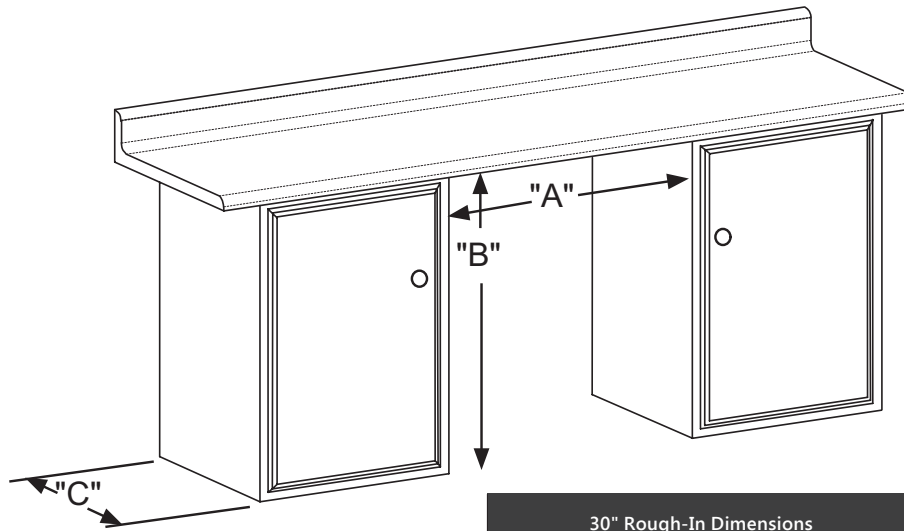

30" Rough-In Dimensions		
"A"	"B"	"C"
30" (76.2 cm)	34" to 35" (86.4 cm to 88.9 cm)	24" (61 cm)

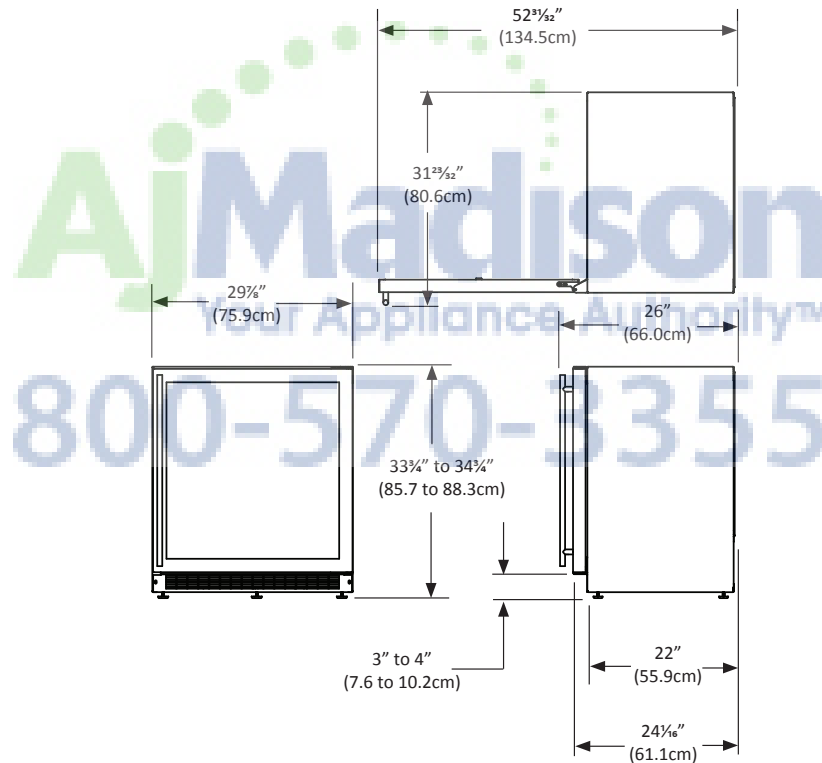

Width	29 7/8"
Interior Finish	Black
Capacity	Up to 68 wine bottles
Shelving System	Side mount - tray
Shelf Fronts	Natural Maple
Other Storage	NA
Interior Lighting	1 incandescent bulb
Toe Grill Finish	Black
Hinge	Classic Hinge
Handle	Designer

Control Type	Marvel Prime™
Temperature Range	40° - 65° F
Lock	NA
Electrical Requirements	120V / 60Hz / 15A
Length of Power Cord	5'
Product Dimensions	29 7/8" W x 33 3/4" H x 22" D
Depth to Front of Door	24 1/16"
Depth to Handle	26"
Depth with door at 90°	52 31/32"
Shipping Weight	191 lbs

Finishes	SS, B, O
Vacation / Sabbath Mode	NA
Agency Approvals	CSA
Energy Star Certified	

Finishes Key

SS = Stainless Steel
 B = Black
 O = Overlay

Overlay Panels

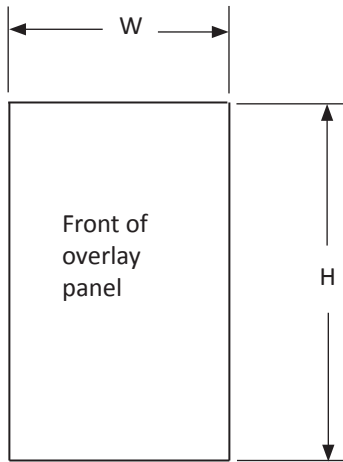


Figure 9
Solid Door Models

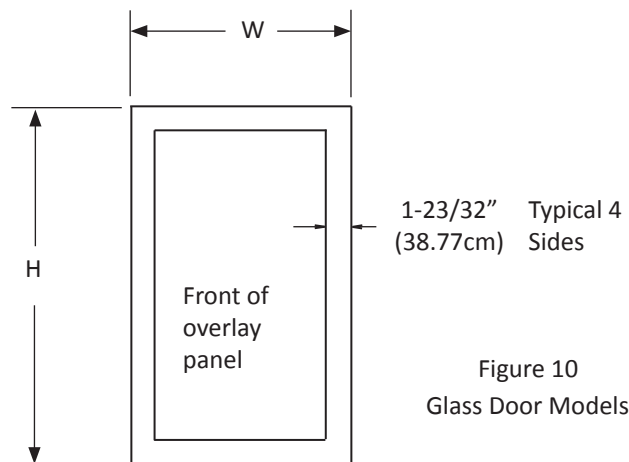


Figure 10
Glass Door Models

Model	W	H
6SWCE	23-5/8" (59.99cm)	30-5/16" (76.99cm)

Table A
Solid Door Models

Model	W	H
8SWCE	29-7/16" (74.78cm)	30-5/16" (76.99cm)

Table B
Glass Door Models

Set the overlay panel on the door front, align the edges, and clamp together. Clamp the panel firmly but be careful not to damage the door or the panel. Mark center of hinge adapter hole on wood panel, top and bottom. (See Figure 11). Remove wood panel from door and drill 5/16" (8mm) diameter clearance holes into the overlay panels 3/4" (20mm) deep. These will be clearance holes for the top and bottom hinge pins.

This is also a convenient time to locate and drill the holes for your handle. Most often the handle is to match that of the surrounding cabinetry. If your handle attaches from the back-side of the custom panel, locate the mounting holes while the panel is attached to the door and cabinet. After the panel is removed from the door, drill the mounting holes from the front, to the recommended diameter of the handle manufacturer. Counter bore the back-side of the panel so the screw heads do not interfere with the surface of the door.

Re-clamp the panel to the door per step 5 and drill the screw pilot holes for attaching the overlay panel to the door. Select the size of the hole from Table C. Be careful not to drill the pilot holes through the overlay panel, (1/2" (12.7mm) deep for 3/4" (19mm) and 5/8" (15.7mm) panels).

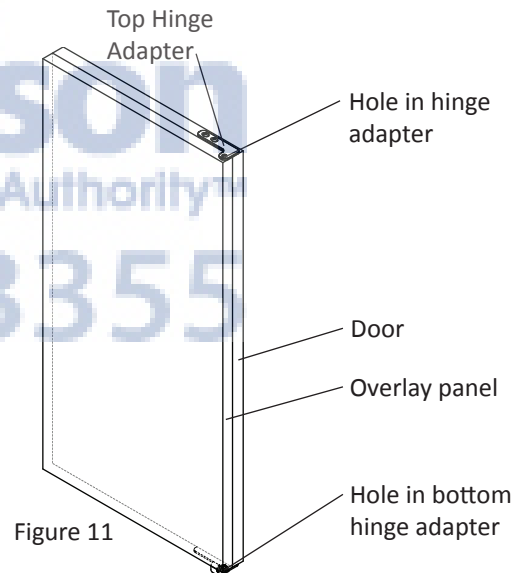


Figure 11

Material Type	Pilot Hole for #8 Wood Screw
Hardwood	1/8" (3.2mm) Diameter. Pilot Hole
Softwood	7/64 (2.8mm) Diameter. Pilot Hole

Table C