


# IEX170 SERIES RANGE HOODS



**For use with external blowers.**


The striking beauty of a multifaceted gemstone in a free-hanging design. Its seamless, handcrafted beauty and slim-line construction accent the faceted look of this centerpiece.

## FEATURES

- Italian design
- Island mount
- Finish: 304 Stainless Steel #4 Brushed
- Size: 70cm x 100cm (27-9/16" x 39-3/8")
- Ducted telescopic flue accommodates 8' to 9' ceilings
- 8" round duct connector/backdraft damper
- Halogen lighting (4 x 20 watt, Type MR16) with two-level lighting provides bright cooktop illumination and a low nighttime setting
- 0.86 Amps - Hood lighting only
- Advanced, multispeed, electronic push-button controls with individual speed indicators
- External mounted blowers available from 280 CFM to 1500 CFM
- Delay timer control automatically shuts off range hood after ten minutes
- Special control indicates when it's time to clean the filter
- Dishwasher-safe filter features a quick-release latch and decorative cover plate
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected

## OPTIONS

- 8" to 10" transition (Model 414)
- Glass shelf (Model GSIS170)
- Replacement grease filters available
- Flue extension for 10' ceiling (Model FEXTIS170)
- Internal blower version available (IS170)

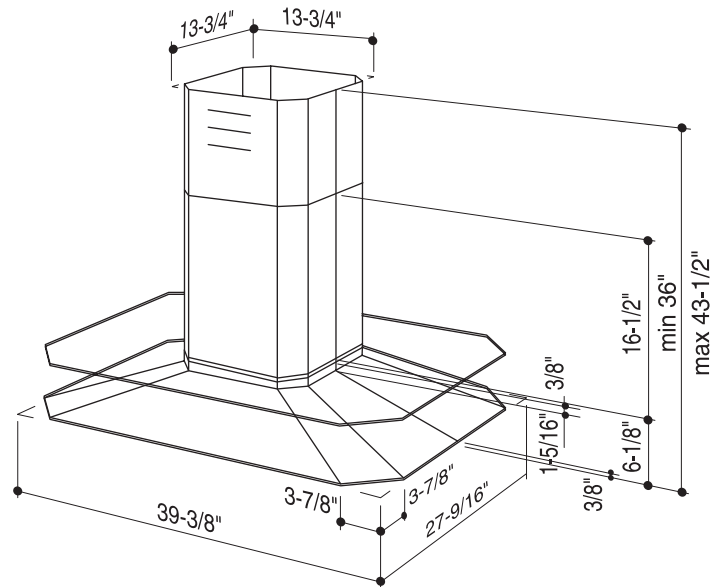

Shown with optional glass shelf.

Mount range hood so bottom of hood is 24" minimum above cooking surface.



**BEST BY BROAN P.O. BOX 140 HARTFORD, WISCONSIN 53027**


| REFERENCE | QTY. | REMARKS | Project           |
|-----------|------|---------|-------------------|
|           |      |         | Location          |
|           |      |         | Architect         |
|           |      |         | Engineer          |
|           |      |         | Contractor        |
|           |      |         | Submitted by Date |

# BLOWER SPECIFICATIONS (purchase blower separately)

|       | IN-LINE BLOWERS |            |          |          | EXTERNAL BLOWERS |          |          |          |
|-------|-----------------|------------|----------|----------|------------------|----------|----------|----------|
| MODEL | ILB3            | ILB6       | ILB9     | ILB11    | EB6              | EB9      | EB12     | EB15     |
| VOLTS | 120             | 120        | 120      | 120      | 120              | 120      | 120      | 120      |
| AMPS  | 2.6             | 2.9        | 3.0      | 3.0      | 2.3              | 5.7      | 3.0      | 3.8      |
| CFM   | 260 (H)         | 600 (H)    | 700 (H)  | 1000 (H) | 600              | 900      | 1200     | 1500     |
| CFM   | 280 (V)         | 600 (V)    | 800 (V)  | 1100 (V) |                  |          |          |          |
| DUCT  | 8" Rd.          | 4½" x 18½" | 8" x 12" | 8" x 12" | 10" Rd.*         | 10" Rd.* | 10" Rd.* | 10" Rd.* |

\* 8" Round Duct connects to hood. 10" Round Duct connects to External Blower. Use Model 414 (8" to 10" Transition).

## IEX170 SERIES WIRING

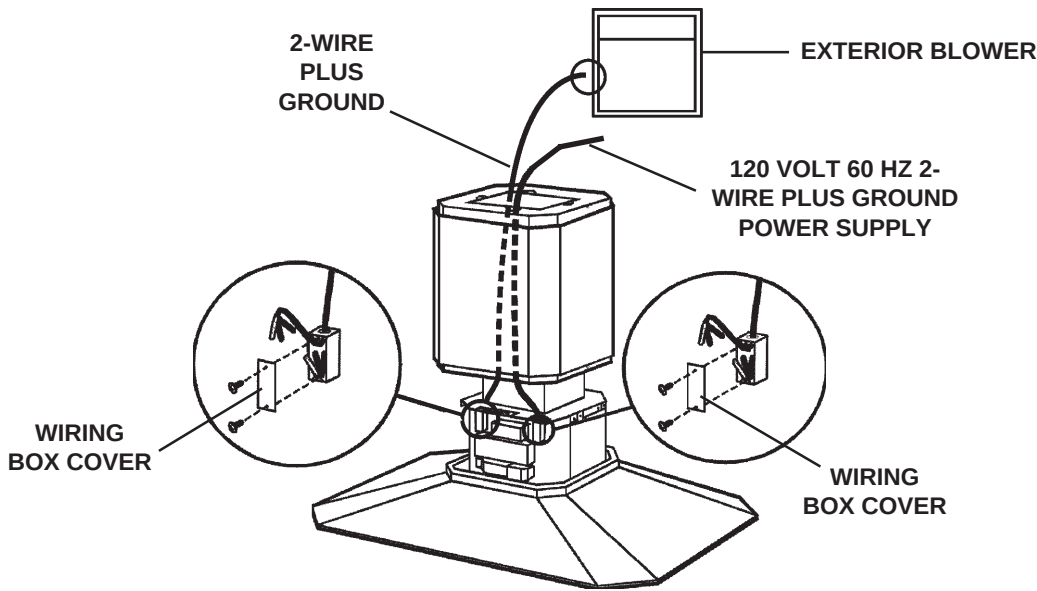

## IEX170 SERIES MOUNTING

