

48-INCH GAS RANGETOP

DTT48M976 | MODERNIST COLLECTION



AVAILABLE MODELS

DTT48M976LS 48" Rangetop, Stainless Steel, Natural Gas DTT48M976PS 48" Rangetop, Stainless Steel, Liquid Propane DTT48M976HS 48" Rangetop, Stainless Steel, Natural Gas/High Altitude DTT48M976AS 48" Rangetop, Stainless Steel, Liquid Propane/ High Altitude DTT48M976LM 48" Rangetop, Graphite Stainless Steel, Natural Gas DTT48M976PM 48" Rangetop, Graphite Stainless Steel, Liquid Propane DTT48M976HM 48" Rangetop, Graphite Stainless Steel, Natural Gas/High Altitude 48" Rangetop, Graphite Stainless Steel, DTT48M976AM Liquid Propane/High Altitude

FEATURES & BENEFITS

- 6 Dual-Stack Sealed Burners + Electric Griddle.
- > Powerful 22K BTU and true simmer burners.
- Continuous grates.
- → Illumina™ Knobs and Ambient Light.
- > Includes brass and black burner caps.
- Available in graphite stainless steel and silver stainless steel finish.

ACCESSORIES (INCLUDED)


WOK RING


BRASS BURNER CAPS


BLACK BURNER CAPS

TOTAL NUMBER OF COOKTOR BURNISSS	4 (DDACC)
TOTAL NUMBER OF COOKTOP BURNERS	6 (BRASS)
LEFT FRONT (BTU)	18,000 DUAL (SIMMER)
LEFT REAR (BTU)	16,000 STACK DUAL (SIMMER)
CENTER FRONT (BTU)	22,000 DUAL (SIMMER)
CENTER REAR (BTU)	9,000 STACK DUAL (SIMMER)
RIGHT FRONT (BTU)	16,000 STACK DUAL (SIMMER)
RIGHT REAR (BTU)	16,000 STACK DUAL (SIMMER)
SEALED BURNERS	YES
GRIDDLE PERFORMANCE	
ELECTRIC	1,400W
CONTROL FEATURES	
LED KNOB BACKLIGHTING	YES
LED AMBIENT LIGHTING	YES
LED CONTROL BUTTON	YES
WI FI CONNECT LED	YES
WI FI CONNECT BUTTON	YES
BLUETOOTH CONNECT LED	YES
BLUETOOTH CONNECT BUTTON	YES
ADDITIONAL FEATURES	
re-ignition	YES
OIL PAN	YES
INSTALLATION	
GAS TYPE	NATURAL GAS/ LIQUID PROPANE
HIGH ALTITUDE AVAILABLE	YES
POWER CORD	YES
TECHNICAL DETAILS	
CIRCUIT BREAKER (A)	15
VOLTS (V)	120
FREQUENCY (HZ)	60
ENERGY SOURCE	GAS AND ELECTRIC
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	8" X 48" X 27 1/2"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	7 3/4" X 48" X 24"
WARRANTY	
WANNAIN I	2 YEARS

APPLIANCE DIMENSIONS




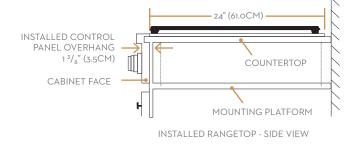



CABINET/COUNTERTOP DIMENSIONS

10" (25.4CM) TO COMBUSTIBLE SIDE WALL MIN. BOTH SIDES





CABINET / COUNTERTOP DIMENSIONS - FRONT VIEW

*NOTE: PRODUCT TOLERANCE +/- 1/16" (+/- 1.6MM)-o UNLESS OTHERWISE NOTED

3/8" (1.0 cm) min. Non combustible rear countertop overhang wall recommended 2.5/8" Open to below to allow for raised vent, gas	10" (2.5 cm) min. to combustible wall above countertop, both sides
and electrical connections 26 5/8" 1/2" (1.3 cm) → ← ← ← ← ← ← ← ← ← ← ← ← ← ← ← ← ← ←	
min. cabinet overhang 1 (2.5 cm) thick mounting platform min.	1/2" (1.3 cm) countertop overhang 1 7/8" (4.8 cm) Counterop overhang 1" (2.5 cm)
below countertop verhang	typical 1 3/8" (3.5 cm) max.

CABINET/COUNTERTOP CUTOUT DMENSIONS WITH DOWNDRAFT VENT - TOP VIEW.

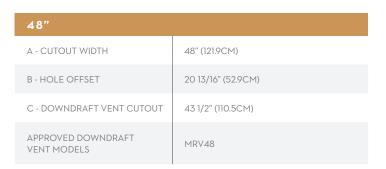





CABINET/COUNTERTOP CUTOUT DMENSIONS WITH DOWNDRAFT VENT - SIDE VIEW

NOTE: Gas and electrical connections may only be routed through the bottom of the rangetop when installed with a downdraft vent.




CABINET/COUNTERTOP CUTOUT DIMENSIONS



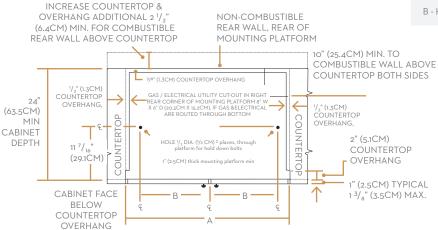

CABINET/COUNTERTOP CUTOUT DMENSIONS WITHOUT DOWNDRAFT VENT - TOP VIEW

CLEARANCE DIMENSIONS

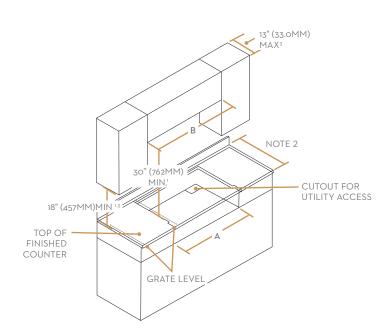

48"	
A - CUTOUT WIDTH	48" (121.9CM)
В	48" (121.9CM)* MINIMUM 54" (137.2CM)** RECOMMENDED

NOTE: All vertical clearances must be maintained for a minimum of 18" (457mm) above the cooking surface.