AMERICAN SANGE

QUALITY PROFESSIONAL COOKING EQUIPMENT

60" AMERICANA Gas RANGES

PERFORMER OPEN BURNERS



RANGE TOP FEATURES

- True commercial lift-off burners for easy cleaning.
- Three sizes of burners to serve your everyday needs:
 25,000 BTU (Ig), 18,000 BTU (med), 12,000 BTU (sm)
- Variable flame settings for all Performer open burners.
- Automatic, electronic re-ignition.
- Continuous cast iron grates allow for easy transfer of pots and pans across the entire cooking surface.
- Porcelainized burner pans catch spills and lift out for easy cleaning.
- Dual action valves provide easy, safe operation.
- Stainless steel Island Back trim included and installed.

OVEN FEATURES

(Two) 30" Convection Oven (4.6 CU.FT. each)

Oven Bake Burner 30,000 BTU each oven

Broil Burner 15.000 BTU each oven

Convection fan

Modes: Bake, Convection Bake, Broil

- Red indicator lights.
- · Functions: Baking, Convection Baking, Broiling.
- Convection system creates uniform air flow.
- Two chrome plated, heavy-duty racks with four positions on heavy gauge chrome side supports.
- Ceramic infrared broiler provides rapid searing at 1,800°F (983°C).

CONVECTION OVEN TECHNOLOGY



Balanced heat distribution is essential when baking, roasting, and dehydrating food. The American Range convection oven technology features a convection motor and louvered side panels to enhance uniform heat distribution throughout the large oven cavity.

The strategic placement of the convection fan ensures


consistent heat distribution.

CONVECTION OVENS ARE GREEN TECHNOLOGY


The highly efficient design of the Convection Oven uses less gas versus a standard oven.




Model # ARROB6062GD Shown with optional leg caps.



ARROB6010



ARROB6062GD



ARROB606GDGR



ARROB6062GR


BURNER CONFIGURATIONS

● 25,000 BTU (lg)

CUSTOMIZE YOUR RANGE

Pick any RAL color to match the color that best suits your lifestyle.






See ralcolorchart.com for color options for the front panel and toe kick. Knobs cannot be customized.






60" AMERICANA GAS RANGES

PERFORMER OPEN BURNERS

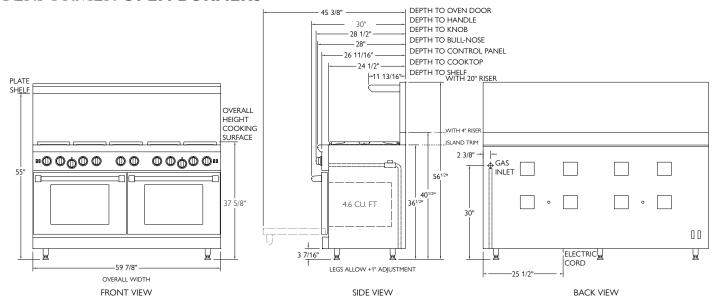

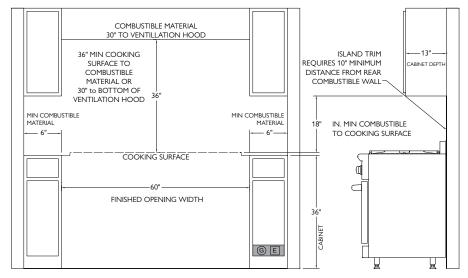

MUST SHIP FROM FACTORY WITH PROPER GAS TYPE

N=Natural Gas L= LP Gas. Must provide N or L after model number for type of gas needed. (Example: ARR636-L) Must specify elevation if over 2000 ft. when ordering.

*ELECTRICAL REQUIREMENTS

A grounded three prong plug with proper polarity must be used.

A manual gas shut-off valve must be installed external to the appliance, in a location accessible from the front, for the purpose of shutting off the gas supply. This is a vented appliance. To be used in conjunction with a suitable vent hood only.

**The American Range Company continually improves its products and reserves the right to change materials, specifications and dimensions without notice. This unit is manufactured for residential use only.

(G) E RECOMMENDED LOCATION OF GAS AND ELECTRICAL SUPPLY ISLAND OR PENINSULA INSTALLATIONS 10" MINIMUM CLEARANCE FROM BACK OF RANGE TO COMBUSTIBLE SURFACE

ISLAND TRIM 0 IN. CLEARANCE TO NON COMBUSTIBLE SURFACE

NO SIDE WALL ABOVE COOKING SURFACE

TECHNICAL SPECIFICATIONS

Overall Oven Capacity	(Two) 30" Convection 4.6 CU. FT. each Oven	Infrared Broiler	15,000 BTU per 30" Oven
Oven Cavity Dimensions	26" W x 201/2" D x 15" H (30" Oven) (660 x 521 x 381) 26" W x 201/2" D x 15" H (30" Oven) (660 x 521 x 381)	Oven Bake Burner	30,000 BTU per 30" Oven
Surface Burner Rating	25,000 BTU (lg) - 18,000 BTU (md) - 12,000 BTU (sm)	Grill Burner Rating	15,000 BTU for every 11" section
		Griddle Burner Rating	20,000 BTU for every 11" section
Gas Supply	7" W.C. Natural, 11" W.C. Propane	Electrical Supply	120 VAC 15 amp 60 Hz Single Phase

			Total Gas	Shipping	
Model Number	Description	Overall Dimensions	Connection Rating	Weight	Crated Dimension
ARROB-1060	10 burners	59%" W x 30" D x 375%" H (1521 x 762 x 956)	293,000 BTU (86 kW)	780 Lbs (354 kg)	61" W x 31" D x 45½" H (1549 x 788 x 1156)
ARROB-660GDGR	6 burners 1 grill 1 griddle	59%" W × 30" D × 375%" H (1521 × 762 × 956)	248,000 BTU (73 kW)	780 Lbs (354 kg)	61" W x 31" D x 45½" H (1549 x 788 x 1156)
ARROB-6602GD	6 burners and 2 griddles	59%" W × 30" D × 375%" H (1521 × 762 × 956)	253,000 BTU (74 kW)	780 Lbs (354 kg)	61" W x 31" D x 45½" H (1549 x 788 x 1156)
ARROB-6602GR	6 burners and 2 grills	59%" W x 30" D x 375%" H (1521 x 762 x 956)	243,000 BTU (71 kW)	780 Lbs (354 kg)	61" W x 31" D x 451/2" H (1549 x 788 x 1156)

ACCESSORIES						OPTIONS (FACTORY INSTALLED)	
1" Island Back (standard)	ARR-48SIB	12" Griddle Cover	ARR-GDCOV12-S	Wok Adapter	ARR-WOK	11" Chrome Flat Griddle Plate	MC11-FS
1" Island Back (welded)	ARR-48IB	12" Grill Cover	ARR-GRCOV12	Porcelainized Broiler Pan	R31005	11" Chrome Grooved Griddle Plate	MC11-GG
4" Stub Back	ARR-484SB	12" Griddle Plate	ARR-PGP12	Extra Oven Rack – 30" Oven	R31037	22" Chrome Flat Finish Griddle Plate	MC22-FS
20" High Back w/ Shelf	ARR-4821HBS	24" Griddle Plate	ARR-PGP24	Easy Glide Rack 30"	R31033	22" Cr L. Matte & R. Grooved GR Plate	MC22HG
S/S Leg Caps (3)	ARR-3LC	24" Griddle Cover	ARR-GDCOV24-S			22" Chrome Grooved Griddle Plate	MC22-GG
12" Cutting Board	ARR-CUTB-12	24" Grill Cover	ARR-GRCOV24			22" Griddle Plate w/ Flavor Separator	MC22-SP

NMFCCODE: 25970-2 Class: 85

