

AZ41E12DAB

GE Zoneline® Deluxe Series Cooling and Electric Heat

Dimensions and Installation Information (in inches) Electrical Wiring

All wiring, including installation of receptacle, must be made in accordance with local electrical codes and regulations.

Note: Aluminum wiring may pose special problems – consult a qualified electrician.

Grille Options

Stamped Aluminum Grille – RAG60

Exterior Architectural Louvers Durable Polycarbonate:

RAG61 (Beige)

RAG63 (Bittersweet)

RAG62 (Maple)


RAG67 (Extruded Aluminum)

Retrofit Kits:

RAK901L – Wall Case Insulation for use with heat pumps.

RAK40 – Deflector Kit to adapt chassis for use with existing exterior architectural louvered grilles.

Wall Case Dimensions

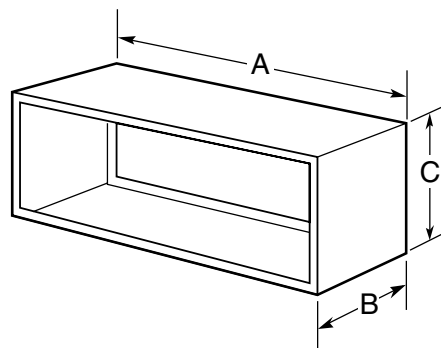

RAK71 Wall Sleeve

Heavy-gauge galvanized steel, with insulation.


A – 42"; B – 13-3/4"; C – 16"

RAK77 Wall Sleeve

Molded SMC fiberglass-reinforced polyester compound.

A – 42-1/8"; B – 13-7/8"; C – 16-1/4"

Maximum Cord Extension (in inches)

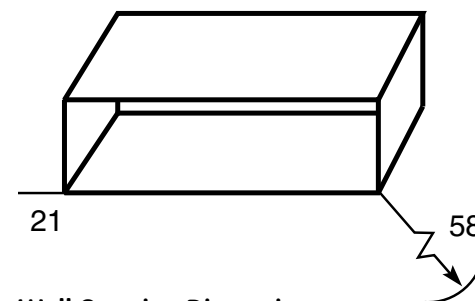

Wall Opening Dimensions

Add 1/4" to A and C dimensions for all cut-out size.

RAK71 16-1/4" Min. H x 42-1/4" Min. W

RAK71 available in 16", 24", 28" and 31" depths

RAK77 16-1/2" Min. H x 42-3/8" Min. W

Ducted Applications

4100 and 6100 series can be used with ductwork to heat or cool more than one room. RAK6052 Duct Adaptor is applied to top of case over air discharge/RAK601 Duct Extension is applied to right or left of adaptor. Locally fabricated ductwork may be added to extend to maximum recommended distance of 15 feet.

Electrical Connection

230/208 volt units may be plugged into a receptacle. 265 volt units are provided with a junction box and require direct connection. (NEC Requires 265V Direct Connection) See Architects and Engineers Design Data Manual for electrical connection information including use of sub-base for direct connected units. Installation must comply with local electrical codes and regulations.

Power Connection kits required on all Zoneline chassis.

For answers to your Monogram®, GE Profile™

or

GE® appliance questions, visit our website at

ge.com or call GE Answer Center® service,

230/208 Volt Line Cord Connected Units				
Line Cord Kit	Electric Heat (Btuh)	Electric Heater Watts	Electric Heat Amps	Min. Circuit Protection (Amps)
RAK3153A	8,600/7,100	2,550/2,090	11.6/10.6	15
RAK3203A	11,700/9,600	3,450/2,820	15.5/14.1	20
RAK3303A	17,000/13,900	5,000/4,090	22.3/20.3	30

230/208 Volt Sub-Base Connected Units				
Sub-Base	Electric Heat (Btuh)	Electric Heater Watts	Electric Heat Amps	Min. Circuit Protection (Amps)
	8,600/7,100	2,550/2,090	11.6/10.6	15
	11,700/9,600	3,450/2,820	15.5/14.1	20
	17,000/13,900	5,000/4,090	22.3/20.3	30




imagination at work

AZ41E12DAB

GE Zoneline® Deluxe Series Cooling and Electric Heat

Features and Benefits

- R-410A Refrigerant
- 11,800/11,600 BTUH Cooling Capacity
- 11.8/11.8 E.E.R.
- Electronic Touch Controls with LED Display
- 3.5 Dehumidification (pts/hr)
- 420/323 CFM Indoor Fan (High/Low)
- 75/38 Vent CFM
- Electronic 7-Step Temperature Limiting To Prevent Overcooling or Overheating of Room
- Heat Sentinel
- 29 Sound Transmission Class (STC)
- Warm Grey Beige

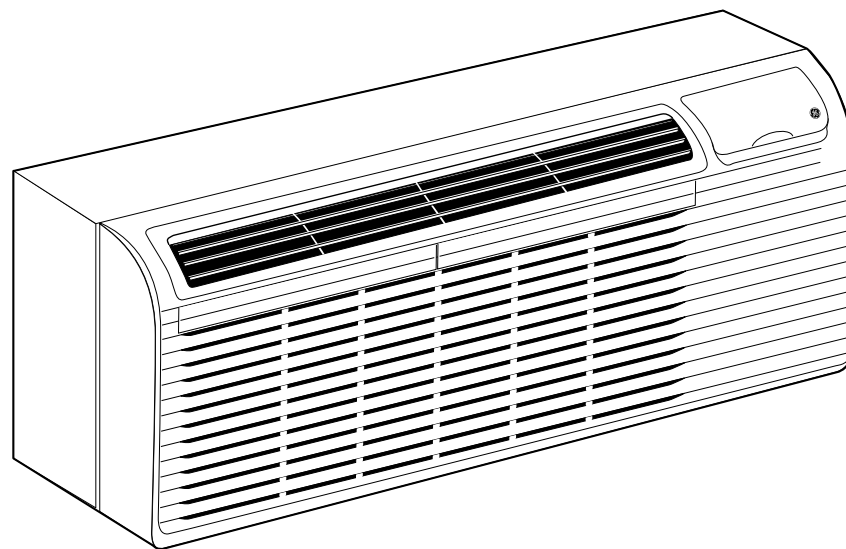

For answers to your Monogram,® GE Profile™
or
GE® appliance questions, visit our website at
ge.com or call GE Answer Center® service,



imagination at work