

The clean, contemporary shape of Glacier complements any kitchen design. This new design has features like the quiet Captur™ system and brilliant halogen lighting.

SIZE	BISQUE	BLACK	STAINLESS	WHITE	GREASE FILTERS (replacement)	NON-DUCTED FILTERS
24 in.		BCSD124BL	BCSD124SS	BCSD124WW	HPFA124 (Type "B1")	HPF24 (Type "Xb")
30 in.	BCSD130BC	BCSD130BL	BCSD130SS	BCSD130WW	HPFA130 (Type "C1")	HPF30 (Type "Xc")
36 in.	BCSD136BC	BCSD136BL	BCSD136SS	BCSD136WW	HPFA136 (Type "D1")	HPF36 (Type "Xd")
42 in.		BCSD142BL	BCSD142SS	BCSD142WW	HPFA142 (Type "E1")	HPF42 (Type "Xe")

HVI PERFORMANCE

Duct Orientation	Size	Damper	Sones		CFM		
			Normal	High	Normal	High 0.25 in. w.g.	High 0.1 in. w.g.
Vertical - Rectangular	3¾ in. x 10 in.	Included	1.5	5.0	140	130	220
Horizontal - Rectangular	3¾ in. x 10 in.	Included	1.5	5.0	110	128	210
Round - Vertical	7 in.	Sold Separately	1.5	5.0	150	110	240

FEATURES

Max. Blower Airflow	300 CFM
Control type	2-speed Rocker
Delay off	no
Filter Clean Reminder	no
Heat Sentry™	no
ADA Capable	yes
Lighting	2-level 50 W Halogen (not included)
Grease Filters	Open Mesh (Qty. 2)
Installation Hardware	EZ1 brackets
ENERGY STAR®	no
Recirculation	Non-ducted filters sold separately

AC INPUT

120 V, 60 Hz - 1.4 AMPS

OPTIONAL ACCESSORIES

7-in. Round Damper	BP87Q
Make-up Air Dampers	MD6TU, MD8TU and MD10TU



MOUNTING HEIGHT

18 in. to 24 in. from cooktop to bottom of hood

LIMITED WARRANTY

1-year (See installation manual for full warranty text.)

FOR INDOOR USE ONLY

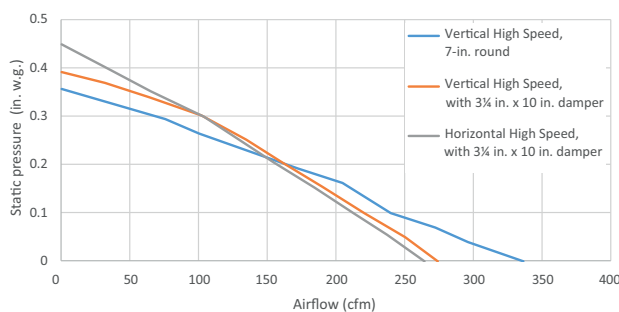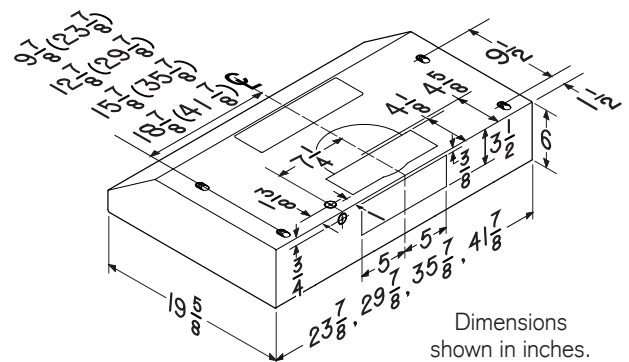

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

99045740D