




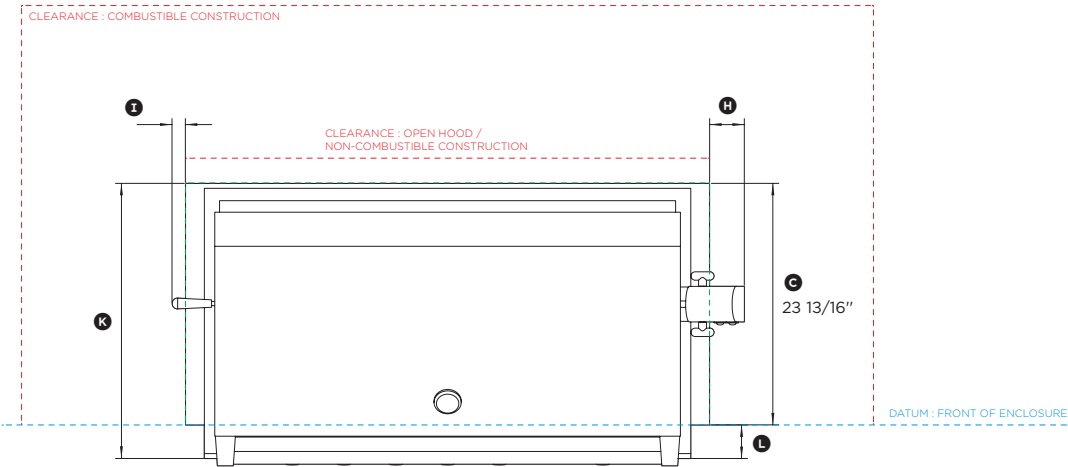


PLAN VIEW

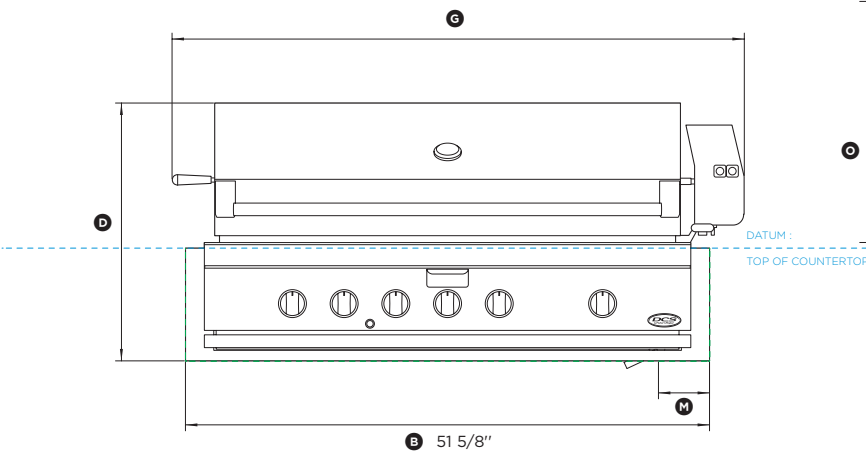

FRONT VIEW

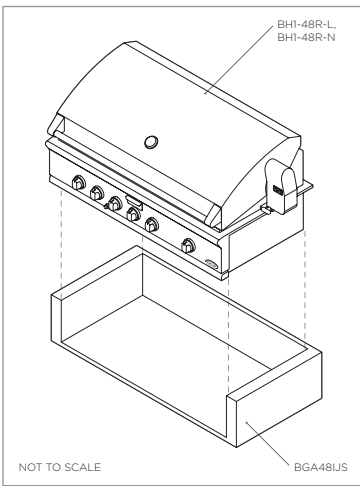

CLEARANCE :  
COMBUSTIBLE CONSTRUCTION

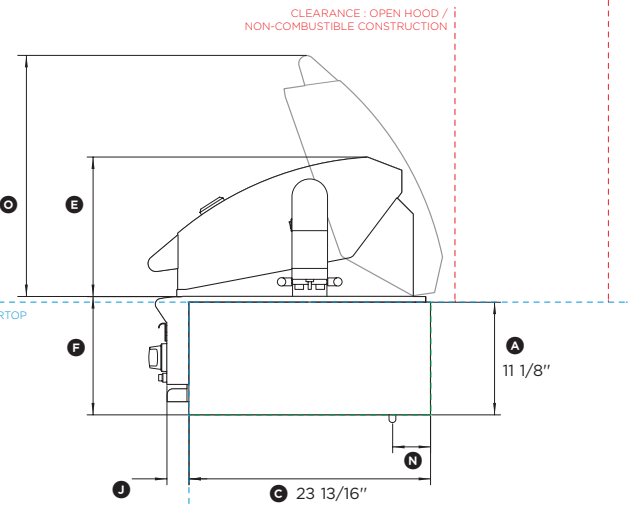

PROFILE VIEW

48" Outdoor Grill with Insulation Jacket

Model no:  
**BH1-48R-L, BH1-48R-N with BGA48IJS**  
(refer page 2 for metric measurements)

| Dimensions                                                                   | in        |
|------------------------------------------------------------------------------|-----------|
| Ⓐ Height of insulation jacket                                                | 11 1/8"   |
| Ⓑ Overall width of insulation jacket                                         | 51 5/8"   |
| Ⓒ Depth from front datum to rear of insulation jacket                        | 23 13/16" |
| Ⓓ Overall height of grill with insulation jacket                             | 25 3/8"   |
| Ⓔ Height from top of hood to top of chassis                                  | 13 3/4"   |
| Ⓕ Height from top of chassis to bottom of insulation jacket                  | 11 5/8"   |
| Ⓖ Overall width of grill with insulation jacket                              | 56 3/8"   |
| Ⓗ Width from right side of jacket to right side of motor cover               | 3 7/16"   |
| Ⓘ Width from left side of jacket to end of skewer handle                     | 1 5/16"   |
| Ⓣ Depth from control panel to front datum                                    | 2 3/16"   |
| Ⓚ Overall depth of grill with insulation jacket (excluding handle and dials) | 27 1/16"  |
| Ⓛ Depth from front of product to front datum (excluding handle and dials)    | 3 3/8"    |
| Ⓜ Distance from gas inlet to right side of insulation jacket                 | 5 1/16"   |
| Ⓝ Distance from gas inlet to rear of insulation jacket                       | 3 3/4"    |
| Ⓞ Height from top of open hood to top of chassis                             | 24 5/8"   |


| Minimum Clearances                                                                                          | in      |
|-------------------------------------------------------------------------------------------------------------|---------|
| Overall width of cavity                                                                                     | 51 5/8" |
| Overall depth of cavity                                                                                     | 23 3/4" |
| Overall height of cavity                                                                                    | 11 1/8" |
| Clearance for open hood / non-combustible construction                                                      | 3"      |
| Clearance to adjacent vertical combustible construction from sides and rear of grill above countertop level | 18"     |

INDICATES CUTOUT  
INDICATES PRODUCT DATUM  
INDICATES CLEARANCES


DATE: 15.01.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. [www.dcsappliances.com](http://www.dcsappliances.com)




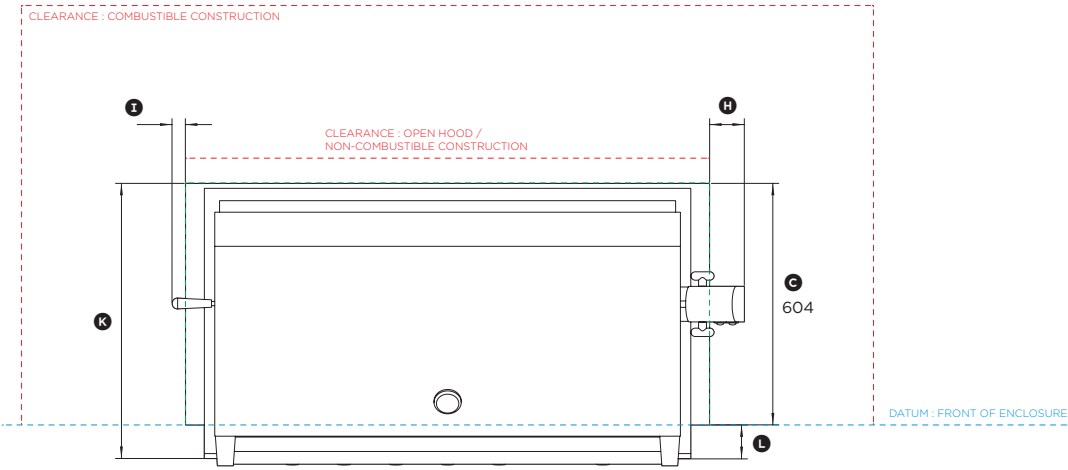

PLAN VIEW

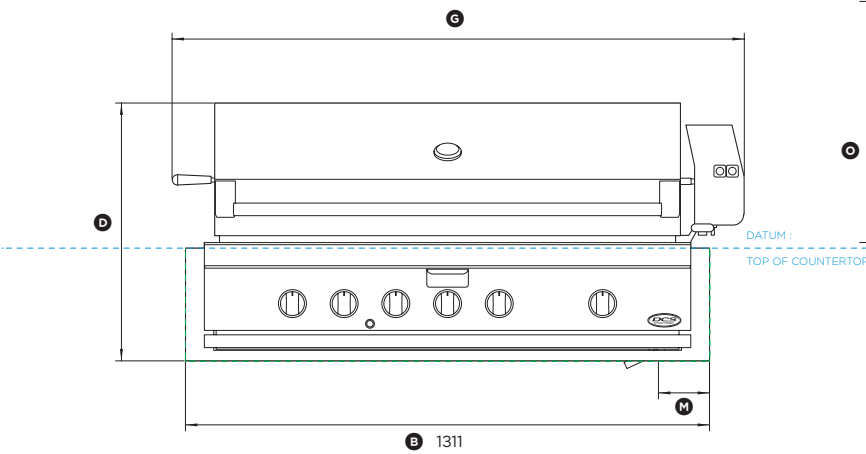

FRONT VIEW

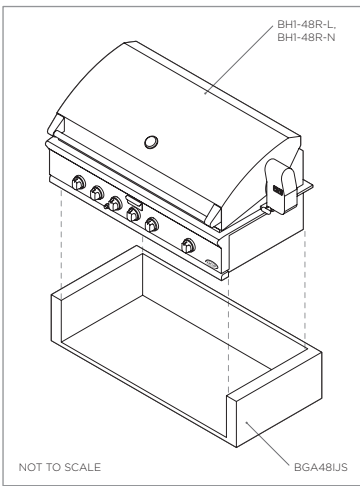

PROFILE VIEW



48" Outdoor Grill with Insulation Jacket

Model no:  
**BH1-48R-L, BH1-48R-N with BGA48IJS**  
(refer page 1 for imperial measurements)

| Dimensions                                                                   | mm   |
|------------------------------------------------------------------------------|------|
| Ⓐ Height of insulation jacket                                                | 282  |
| Ⓑ Overall width of insulation jacket                                         | 1311 |
| Ⓒ Depth from front datum to rear of insulation jacket                        | 604  |
| Ⓓ Overall height of grill with insulation jacket                             | 645  |
| Ⓔ Height from top of hood to top of chassis                                  | 349  |
| Ⓕ Height from top of chassis to bottom of insulation jacket                  | 296  |
| Ⓖ Overall width of grill with insulation jacket                              | 1432 |
| Ⓗ Width from right side of jacket to right side of motor cover               | 92   |
| Ⓘ Width from left side of jacket to end of skewer handle                     | 34   |
| Ⓣ Depth from control panel to front datum                                    | 55   |
| Ⓚ Overall depth of grill with insulation jacket (excluding handle and dials) | 688  |
| Ⓛ Depth from front of product to front datum (excluding handle and dials)    | 85   |
| Ⓜ Distance from gas inlet to right side of insulation jacket                 | 128  |
| Ⓝ Distance from gas inlet to rear of insulation jacket                       | 95   |
| Ⓟ Height from top of open hood to top of chassis                             | 626  |

| Minimum Clearances                                                                                          | mm   |
|-------------------------------------------------------------------------------------------------------------|------|
| Overall width of cavity                                                                                     | 1311 |
| Overall depth of cavity                                                                                     | 603  |
| Overall height of cavity                                                                                    | 283  |
| Clearance for open hood / non-combustible construction                                                      | 76   |
| Clearance to adjacent vertical combustible construction from sides and rear of grill above countertop level | 457  |

INDICATES CUTOUT  
INDICATES PRODUCT DATUM  
INDICATES CLEARANCES

DATE: 15.01.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. [www.dcsappliances.com](http://www.dcsappliances.com)

