


New 200 Series Single Oven
Metal behind glass
 Pyrolytic self-cleaning system
 Width 30" (76 cm)



Right-hinged
BO 280-610*
 Stainless steel-backed full glass door
BO 280-630*
 aluminum-backed full glass door

Left-hinged
BO 281-610*
 Stainless steel-backed full glass door
BO 281-630*
 aluminum-backed full glass door

*Available 3rd quarter 2007.

Included accessories:

One core temperature sensor.
 One rotisserie spit.
 One wire rack.
 One baking tray.
 One broiling tray with wire rack.

Optional accessories:

BO 280/281-...*

- An extra-wide 30" oven, 4.4 cu.ft. of usable volume, and 5 rack levels. Space for the especially large roast or two chickens.
- 17 heating modes, with core temperature sensor, rotisserie spit and baking stone option, basically all cooking methods.
- Pyrolytic self-cleaning system for easy oven cleaning.

Universal heating system with 17 heating modes.
 Electronic temperature control from 85°F – 570°F.

Net volume 4.5 cu.ft.

LCD function display with digital clock.
 Timer functions: cooking time, switch off time, short-term timer, stop watch, long-term timer.
 Rotary knob and touch key operation.

Save up to 6 memory recipes (incl. core temperature sensor).
 Rotisserie spit.
 Core temperature sensor with automatic shut off.
 Thermo-Test actual temperature display.
 Super-Quick preheat.
 Baking stone outlet.
 Menu settings with clear text display.
 75 W halogen light on the top.
 2 x 10 W halogen light on the side.
 Gaggenau Clean-Enamel.
 Enamel wire racks on the side with 5 rack levels, pyrolytic safe.
 Thermally insulated door with quadruple glazing.
 Child lock.
 Safety lock.
 Side-opening door opens up to 180° angle.
 Cooled housing with temperature protection.

Pyrolytic self-cleaning.
 Heated air cleaning catalyst.

BA 058-131 Baking stone with support and pizza peel (heating element must be ordered separately).

BA 058-111 Heating element.
 Necessary accessory for baking stone BA 058-131.

A cast roaster for the roasting function of the new BO 200 Series is in development.

Additional accessories on page 25-26.

Planning notes:


Door hinge not reversible.

The front of the appliance extends 1 7/8" from the cabinet front.
 The outer edge of the door handle extends 3 11/16" from the cabinet front.
 When planning a corner solution, pay attention to the 90° door opening angle.
 Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.
 Plan a gap of at least 3/16" between the appliance and adjacent cabinets.
 To achieve the 21 5/8" installation depth, the connecting cable needs to follow the slanted edge on the lower right hand corner of the housing. The plug needs to be planned outside of the cut-out niche.

Rating:

Total rating: 5.52 kW.
Total Amps: 25 or 2 x 16 Amps
208/220-240V/60Hz

Plan for a connecting cable.

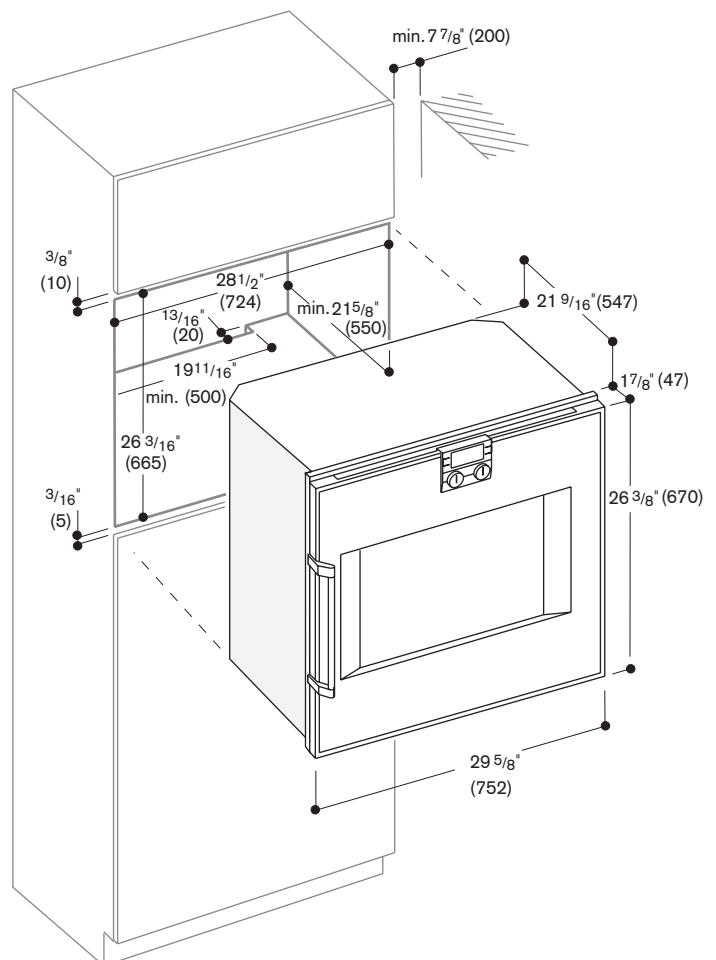

Numbers indicated inside parenthesis () = mm