BROAN® NuTone®

SPECIFICATION SHEET

MODEL PM25
POWER MODULE

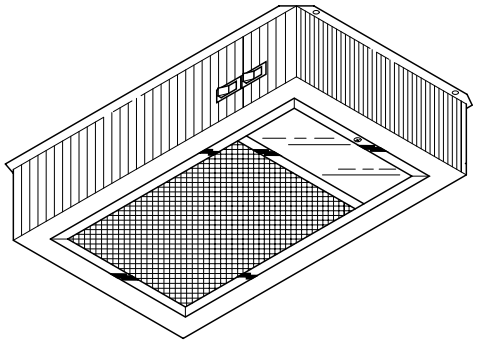

FEATURES

- Two-speed motor
- Rocker switch controls
- 6 5/8" Fan, 250 CFM, 6.0 Sones
- 7" round ducted or non-ducted discharge
- Enclosed light
- Accepts one incandescent max. 60-watt bulb (not included)
- One-piece, washable aluminum mesh filter
- Optional, disposable charcoal filter kit - #354NDK
- Durable, powder coated finish
- All edges hemmed for safety and strength
- One Year Limited Warranty

c UL us

TESTED/CERTIFIED 2100 HVI Home Ventilating Institute DIVISION OF AMCA

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

TYPICAL SPECIFICATION

Power Module shall be Broan Model PM25WW (PM25BL).

Power Module shall have a two-speed motor and enclosed light, controlled by rocker switches.

Fan must be convertible between ducted and non-ducted discharge. Ducted mode uses 7" duct and washable aluminum mesh filter. Non-ducted mode uses optional, disposable charcoal filter.

Unit shall have a durable, powder coated finish with all edges hemmed.

Air delivery to be at least 250 CFM and sound levels not greater than 6.0 Sones. Unit shall be U.L. listed.

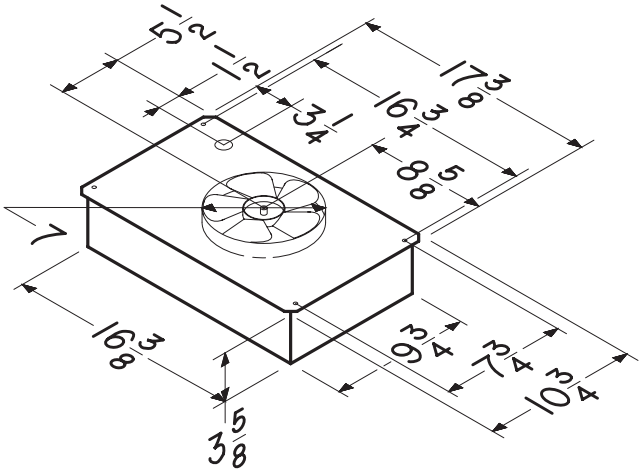

Broan-NuTone LLC, 926 W. State Street, Hartford, WI 53027 (1-800-637-1453)
NuTone, Inc., 4820 Red Bank Road, Cincinnati, OH 45227 (1-800-543-8687)
Broan-NuTone Canada, Inc., 1140 Tristar Drive, Mississauga, Ontario L5T 1H9 (1-888-882-7626)

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date