



IN HARMONY WITH YOUR LIFE

Established in 1883 in Germany, Blomberg® has more than 130 years of delivering quality and innovation in the appliance and metal industries. Blomberg focuses on intelligent solutions, advanced design techniques, and the highest quality materials to achieve cutting-edge performance found in larger footprint units but optimized for smaller living spaces.

TABLE OF CONTENTS

1	REFRIGERATORS	3
	COMPACT WASHERS & DRYERS09	9
	DISHWASHERS15	<u>-</u>
	COOKING APPLIANCES 23	3
	TECHNICAL DETAILS	3

IN HARMONY WITH NATURE

Environmentally friendly refrigeration

HARMLESS COMPONENTS

Blomberg® refrigerators are not only energy-efficient but also RoHS compliant. The products are built of 99.9% lead-free materials, and 85% of our components are recyclable.

MAXIMUM ENERGY EFFICIENCY

All Blomberg products are ENERGY STAR® qualified, offering you maximum freshness while saving you money and energy. Some Blomberg fridges are recognized by the Environmental Protection Agency (EPA) most distinguished ENERGY STAR Most Efficient 2014 mark.



REFRIGERATORS

From proprietary Blue Light Technology to maintain the freshness and vitamin value of your fruits and vegetables, to a Flexi Zone temperature control system from -10°F to +50°F that allows you to store fresh or frozen foods in one compartment, Blomberg's Four-Door Cooling Refrigerator is manufactured with innovative technology and state-of-the-art design to stay in harmony with your life.

MAIN FEATURES



Illumination with white LED

The majority of the models in the Blomberg® range feature illumination with white LED for better aesthetics inside your fridge and less energy consumption.

Maximum space

Flexi rack, a flexible, suspended, chrome bottle holder featured in certain refrigerators, is a practical accessory. It is located just below the glass shelves. It provides extra storage space for bottles, and it is ideal for cooling wine and tall bottles of water.







Inner digital display

The inner digital display featured in Blomberg BRFB 1822 and BRFB 1812 series allows accurate temperature settings. Furthermore; models that include automatic ice machines have a special function over the display where you can stop and initiate the ice-making process.

Automatic ice machine

BRFB 1822 series features an automatic ice machine that prepare your ice with a single step.

Robust handle

Blomberg cooling products are equipped with robust aluminum handles that give your product an elegant look.

Glass shelves

The shelves within the Blomberg cooling range are made of safety glass and are high-impact resistant. They help to prevent food and beverages from spilling onto the lower shelf, making cleaning easier.

Transparent drawers

The front of the crisper and freezer drawers in Blomberg refrigerators are transparent, so that you can see the contents clearly without opening the drawers, saving time and minimizing energy loss.





SPECIALTY FEATURES

Four-door french door

The Blomberg four-door French door refrigerator is specially designed to provide maximum cooling advantages. With 80 cm (31½ inch) wide shelf space, it has the largest cooling area for easy and ergonomic use of the refrigerator. For maximum flexibility, you can set the temperature of the special cool & freeze zone from -10°F to +50°F. You can use this 77-liter (2.7 cu.ft) compartment as a freezer, super fresh zone, or a fresh-food compartment depending on your storage needs.





This special four-door french door refrigerator features the Blomberg trio-cycle no frost technology, which provides separate air circulation in the freezer, the fresh food compartment, and the flexi zone by means of three separate fans. This separate air movement prevents odor blending and leads to a more homogenous air distribution for better preservation of food, delivering at the same time more energy efficiency and silent cooling.

Duo cycle no frost technology



Certain Blomberg fridge freezers are equipped with an advanced duo cycle no frost technology, which provides more homogenous, energy-efficient, and silent cooling. There is no air transfer between the freezer and fresh-food compartments.

By means of this separate air movement, the air in the freezer section does not mix with the air in the fresh

food section, eliminating odor mixing. This duo cycle air circulation also leads to a more homogenous air distribution for better preservation of food items. Because the freezing air circulates only in the freezer compartment, food is frozen faster in comparison to conventional freezers.

Frost free



Certain Blomberg fridge-freezers keep fruits and vegetables fresher for longer periods of time. The frost-free cooling system creates a permanent cold environment, eliminating buildup of ice and bacteria in the freezer and avoiding unpleasant fridge odors. You will find that food packs don't stick together. Best of all, there is no need to manually defrost the freezer.

SAFETY FEATURES







Blue Light Technology

The exclusive Blomberg Blue Light Technology allows fruit and vegetables to continue photosynthesis while in the fridge. The blue zone is a special crisper illuminated with blue light, which is essential for healthy plant development. Through a constant supply of blue light rays, your Blomberg refrigerator will maintain the vitamin value of fruit and vegetables so you can keep them fresher and juicier for longer.

Hygiene+ antibacterial carbon filter

Present in some fridges is the photo catalyst carbon filter, which eliminates bacteria potentially present in the refrigerator by working in conjunction with the air-cooling systems of the no frost or static models (with built-in fans). This ensures permanently high levels of hygiene. protection from bacteria buildup, and reduced fridge odor. The carbon filter can be reactivated easily, with just one day's exposure to sunlight.

HygAIR ionizing technology

The exceptional HygAIR technology, inherent in select Blomberg refrigerators, is developed to bring freshness of the pine forests to your kitchen. The HygAIR technology eliminates airborne bacteria and odor-forming molecules by producing natural negative ions inside the cabinet. These ions capture microorganisms and transfer them out of the refrigerator via the defrost process. As a result, your food stays fresher for longer, and you can smell nature in your fridge.

Antibacterial door gaskets

The refrigerator door gaskets provide an ideal environment for bacteria formation, creating a health hazard for you and your family. For maximum hygiene inside your refrigerator, Blomberg coated the refrigerator door gaskets with an antibacterial seal that eliminates bacteria.

REFRIGERATORS

BRFD 2650 SSN



25.7 cu.ft (750 L) Total Gross Volume Trio-Cycle No Frost Cooling

- 15.36 cu.ft (435 L) net fresh food volume
- Frost free
- Water dispenser
- Touch button display
- Chrome coated wine rack Illumination with white LED
- 3 safety glass shelves
- 6 door racks
- ENERGY STAR® qualified

Flexible temperature selection option from -10°F to +50°F

- 7.98 cu.ft (226 L) net freezer volume
- Auto defrost
- Automatic ice machine
- 6 drawers

Blue zone

- hygAIR ionizing technology
- Hygiene+ antibacterial carbon filter
- Antibacterial seal

Technical Information

- Dimensions (H x W x D) (cm): 185 x 90.8 x 86.1
- Dimensions (H x W x D) (in): 72 3/4 x 35 3/4 x 33 15/16* *Depth is with door handles. (Without handles, depth is 31 15/16".)

BRFD 2650 SSN: Fingerprint-free stainless steel















BRFB 1822 SS/BRFB 1822 SSL



17.8 cu.ft (505 L) Total Gross Volume **Duo Cycle No Frost Cooling**

- 11.05 cu.ft (313 L) net fresh food volume
- Frost free
- Chrome coated wine rack
- Illumination with white LED
- 3 safety glass shelves
- 3 door racks
- ENERGY STAR® qualified

Freezer

- 5.12 cu.ft (145 L) net freezer volume
- Auto defrost
- Automatic ice maker
- Fast-freeze function
- 3 drawers

Hygiene

- Blue zone
- hygAIR ionizing technology
- Hygiene+ antibacterial carbon filter
- Antibacterial seal

Technical Information

- Dimensions (H x W x D) (cm): 172 x 74 x 77
- Dimensions (H x W x D) (in): 67 3/4 x 29 1/8 x 30 3/8* *Depth is with door handles. (Without handles, depth is 28 3/8".)

- BRFB 1822 SS: Fingerprint-free stainless steel, auto ice maker, right hinge
- BRFB 1822 SSL: Fingerprint-free stainless steel, auto ice maker, left hinge
- BRFB 1822 WH: Fingerprint-free white, auto ice maker,













BRFB 1812 SS / BRFB 1812 SSL



- 11.05 cu.ft (313 L) net fresh food volume
- Frost free Chrome coated wine rack
- Illumination with white LED
- 3 safety glass shelves
- 3 door racks ENERGY STAR® qualified

Freezer

- 5.12 cu.ft (145 L) net freezer volume
- Auto defrost
- Twist Ice Maker
- Fast-freeze function
- 2 drawers

Hygiene

- Blue zone
- hygAlR ionizing technology
- Hygiene+ antibacterial carbon filter
 - Antibacterial seal

Technical Information

- Dimensions (H x W x D) (cm): 172 x 74 x 77
- Dimensions (H x W x D) (in): 67 3/4 x 29 1/8 x 30 3/8* *Depth is with door handles. (Without handles, depth is 28 3/8".)

- BRFB 1812 SS: Fingerprint-free stainless steel, no ice maker, right hinge
- BRFB 1812 SSL: Fingerprint-free stainless steel, no ice maker, left hinge





















BRFB 1452 SSN



14.83 cu.ft (408 L) Total Gross Volume No Frost

- 10.77 cu.ft (305 L) net fresh food volume
- Chrome coated wine rack
- Bottle holder
- Illumination with white LED
- 3 safety glass shelves
- 4 door racks
- 2 egg trays
- Field reversible hinge design ENERGY STAR® qualified

- 3.04 cu.ft (86 L) net freezer volume
- Auto defrost Ice cube tray Fast-freeze function

Hygiene

- Antibacterial seal
- Technical Information
- Dimensions (H x W x D) (cm): 191.5 x 70 x 63 Dimensions (H x W x D) (in): 77 1/4 x 27 1/2 x 26 3/4* *Depth is with door handles. (Without handles, depth is 24 3/4".)

BRFB 1452 SSN: Fingerprint-free stainless steel











11.7 cu.ft (330 L) Total Gross Volume No Frost

- 7.23 cu.ft (205 L) net fresh food volume
- Chrome coated wine rack
- Bottle holder
- Illumination with white LED 3 safety glass shelves
- 4 door racks
- 2 egg trays Field reversible hinge design

ENERGY STAR® qualified

- 2.61 cu.ft (74 L) net freezer volume

Hygiene Antibacterial seal

Technical Information

 Dimensions (H x W x D) (cm): 184.5 x 59.5 x 65 Dimensions (H x W x D) (in): 72 5/8 x 23 3/8 x 25 5/8*

*Depth is with door handles. (Without handles, depth is 23 5/8".)

nofrost hygiene*

LED interior interior

BRFB 1152 SSN: Fingerprint-free stainless steel

BRFB 1042 SSN



10.6 cu.ft (300 L) Total Gross Volume No Frost

- 6.18 cu.ft (175 L) net fresh food volume Chrome coated wine rack
- Bottle holder
- Illumination with white LED 3 safety glass shelves
- 3 door racks 2 egg trays

ENERGY STAR® qualified

2.61 cu.ft (74 L) net freezer volume

Field reversible hinge design

Auto defrost Ice cube tray

Fastf-reeze function

Antibacterial seal


echnical Information Dimensions (H x W x D) (cm): 171 x 59.5 x 65

*Depth is with door handles. (Without handles, depth is 23 5/8".)

BRFB 1042 SSN: Fingerprint-free stainless steel

Dimensions (H x W x D) (in): 67 3/8 x 23 3/8 x 25 5/8*

- BRFB 1042 SLN: Silver Look
- BRFB 1042 WHN: White















BRFB 1050 FFBIN



10.6 cu.ft (300 L) Total Gross Volume **Duo Cycle No Frost Cooling**

- 6.1 cu.ft (173 L) net fresh food volume
- Bottle holder
- 3 safety glass shelves 3 door racks
- 2 egg trays Field reversible hinge design

Illumination with white LED

ENERGY STAR® qualified

- Freezer • 2.3 cu.ft (65 L) net freezer volume
- Auto defrost
- Ice cube tray

Hygiene Antibacterial seal

Fast-freeze function

Hygiene+ antibacterial carbon filter

Technical Information

Dimensions (H x W x D) (in): 69 15/16 x 21 15/16 x 21 1/2

BRFB 1050 FFBIN: Fully integrated

Must order separate kitchen cabinet door from your cabinet manufacturer.

Dimensions (H x W x D) (cm): 177.7 x 55.6 x 54.5














Blomberg

IN HARMONY WITH NATURE

Environmentally friendly clothing care

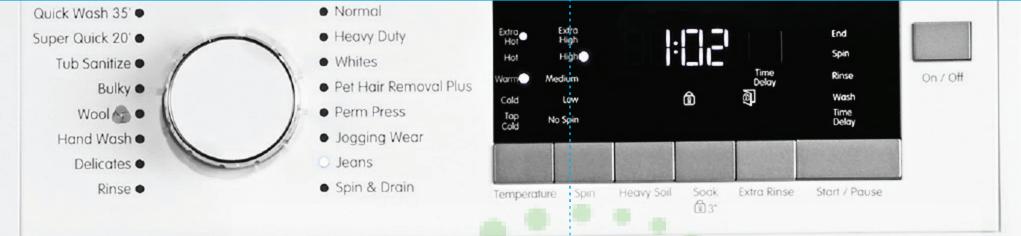

MAXIMUM ENERGY



All Blomberg® washers are ENERGY STAR® qualified, offering you cleaner laundry while saving you money and energy. All Blomberg washers and dryers are not only energy-efficient but also RoHS compliant.

MAXIMUM WATER EFFICIENCY

All Blomberg washing machines are equipped with the automatic water adjustment system, which enables your machine to adjust its water intake based on the amount of the laundry for conservation of water resources.



COMPACT WASHERS & DRYERS

Whether it's a white cotton button-down or black denim jeans, Blomberg's compact washing machines and dryers are in harmony with you, your fashion, and your style. The washers are equipped with a variety of cycles, each specifically designed for expert clothing care. Architects and designers will find flexibility and freedom in installation with a line of compact and stacking washers and dryers.



MAIN FEATURES

WASHING FEATURES

Electronic controls

All Blomberg[®] washing machines have ergonomically positioned control panels, fully electronic controls, and intelligent programs operated via a single dial for simple program selection. Washing with an LCD controlled machine makes laundry care easy; just press "start" and go. The machine helps you by suggesting the correct temperature and spin speed according to the selected program, and you can either accept the suggestion or choose your own settings.



Designed specially for Blomberg washers, this system measures the level of excessive foam in the laundry and automatically adjusts the rinse cycle for a perfect result. This ensures efficient rinsing and prevents risks of irritation to sensitive skin and white traces on dark color textiles.

Internal water heater

Blomberg washers are equipped with internal water heaters, which enable higher water temperatures for better washing results and the total hygiene of cottons

ENGINEERED IN HARMONY WITH YOUR HOME



Liquid detergent compartment

Blomberg offers a special liquid detergent compartment for washing of different kinds of textiles like wool, silk, and colorful

Special functions

Blomberg washing machines offer auxiliary functions to provide for better care for your laundry.

Super wash function chooses the best washing option and increases the wash duration to eliminate even the toughest stains from clothes. Extra rinse function provides more rinse cycles, which prevents risk of irritation to sensitive skin and white traces on dark color clothes. Anti-crease function reduces creases while washing clothes. For heavily soiled items, Soak function soaks the laundry in a relatively high amount of warm water to pre-treat it before washing.



Easy access to lint filter

DRYING FEATURES

Special drum paddles

The extra-large lint filter is located on the front of the machine, allowing easy access. With its wide handle, removal and cleaning are easy tasks. The large surface area of the filter also improves drying performance.

The special drum paddles, with their unique form, ensure

more homogenous drying as well as less creasing.

Moreover, you will not face any tangling problems



The bi-directional drum action ensures that your laundry dries evenly.

Flexible placement

Stacking kit is an easy and safe way to keep the aesthetic harmony between washing machine and dryer. It's so simple to install the kit that you can even do it yourself.

Anti-crease

The anti-crease cycle separates and smoothes your laundry after the drying cycle by means of a gentle drum action, so clothes come out wrinkle-free and ready to wear.





and baby clothing.



SMARTER CLOTHING CARE

Blomberg® washers feature special programs engineered for different fabrics.



Cottons / Regular

For the care of your cotton garments, Blomberg washers feature a choice of programs with wash temperatures ranging from 60°F to 165°F. The cold cycle is for lightly soiled cottons while the sanitary cycle provides maximum hygiene for highly soiled clothes.



Permanent Press

To ensure safe cleaning of synthetic fibers, Blomberg washers offer three different alternatives from cold to hot according to the dirt level of your laundry. Furthermore, your machine limits the spin speed to 800 rpm for longer fabric life.



To ensure safe cleaning of synthetic fibers, Blomberg washers offer three different alternatives from cold to hot according to the dirt level of your laundry. Furthermore, your machine limits the spin speed to 800 rpm for longer fabric life.



Hand wash cycles allow the safe wash of fabrics such as silks and cashmere. These programs wash gently with a slow and even drum movement that delivers highly efficient cleaning while caring for and extending the life of clothes. With the intelligent control system, your washer automatically limits the spin speed to 600 rpm, and for complete hand wash protection, the cycle will not allow you to select any function which may damage your clothes.



To extend the life of woolens, Blomberg washers feature special wool wash cycles, which gently rock your clothes to and fro and limit the spin speed to 600 rpm.

For different laundry needs, the Blomberg dryer offers flexible program options.



This program is ideal for durable cottons such as sheets. You have the option of choosing the drying level between damp, regular, and extra dry alternatives.



To extend the life of woolens, Blomberg heat pump ventless dryers feature special wool wash cycles, which gently and safely dry your clothes.



For less durable fabrics, Blomberg features the permanent press cycle, which dries the laundry at a lower temperature. This program is ideal for synthetic clothes.



Delicate drying is a special cycle for your delicate laundry items where the drying time is

The refresh cycle is a freshen-up program that eliminates odors in clothes, without having to



To achieve the desired final drying level, the Blomberg dryer features 15, 30, and 60-minute timed program options. Regardless of the dryness level of the laundry, the cycle continues to dry at a low temperature for the duration chosen.



This program is specially designed for clothes made of different types of fabric. It provides low-temperature, gentle drying for longer garment life.

IN HARMONY WITH THE FUTURE

NEW VENTLESS HEAT PUMP TECHNOLOGY

DISCOVER THE MOST ENERGY-EFFICIENT DRYER IN ITS CLASS.

At 24 inches wide, big things now come in small, efficient packages. The NEW Ventless Heat Pump Technology and state-of-the-art design from Blomberg provide unparalleled clothing care while working in harmony with nature, your home, and your life.



MOST ENERGY-EFFICIENT

Blomberg heat pump dryers are the most energy-efficient in their class, with 5



To keep clothes at their best, Blomberg dryers' circulating air temperature is 40% lower.* The dryers also feature a special woolen cycle for longer garment life.




Designed with small-space living in mind. the 24" width, 4.1 cubic-foot capacity, compact dryer is perfect for homes of all



FLEXIBLE

The ventless heat pump technology with easy installation allows builders and designers the flexibility to place dryers anywhere in the home, from the kitchen to hall closets.





WASHERS

WM 98400 SX/WM 98200 SX

Full Electronic Washing Machine

2.5 cu.ft loading capacity Variable spin speed from 600 to 1400rpm LED digital display

Wash Cycles

Normal, Heavy Duty, Whites, Bulky, Perm Press, Jogging Wear, Jeans, Woolens, Delicates, HandWash, Super Quick 20'. Quick Wash 35', Tub Sanitize, Rinse, Spin & Drain

Main Features

- 24-h time delay
- Remaining time
- Functions: Heavy Soil. Pre-Soak. Extra Rinse
- Automatic water adjustment system
- Automatic detergent dispensing system Automatic temperature control
- Numerical display
- Stainless steel drum
- ENERGY STAR® qualified
- Child lock

- Dimensions (H x W x D): 33 1/8 x 23 3/8 x 24 5/8 in
- Dimensions (H x W x D): 84 x 59.5 x 62.5 cm

WM 98400 SX: With chrome door WM 98200 SX: With white door



















WM 77120

Full Electronic Washing Machine

1.95 cu.ft loading capacity Variable spin speed from 400 to 1200rpm LCD control

Wash Cycles

Regular/Cotton, Sanitary, Baby, Sport, Jeans, Quick Wash, Drain & Spin, Rinse, Hand Wash, Wools, Delicates, Permanent Press, Pet Hair Removal Plus

Main Features

- 24-h time delay
- Remaining time
- Functions: Super Wash, Soak, Extra Rinse, Anti-Crease
- Automatic water adjustment system
- Automatic detergent dispensing system
- Automatic temperature control Numerical display
- Stainless steel drum
- ENERGY STAR® qualified
- Child lock

Technical Information

- Dimensions (H x W x D): 33 1/8 x 23 3/8 x 21 5/8 in
- Dimensions (H x W x D): 84 x 59.5 x 55 cm

WM 77120: White









DHP 24412 W/DHP 24400 W

DRYERS



Heat Pump Ventless Dryer

LED digital display

Drying Cycles

4.1 cu.ft

Jeans, Delicates, Permanent Press, Cottons/Regular, Timed Programs, Air Fluff, Express Sensor Drying, Bulky, Timed Dry, Silent, Woolens, Jogging Wear, Baby

Main Features

- OptiSense Automatic sensor drving
- Bi-directional drum action
- Auto anti-creasing cycle
- Aguawave structured stainless steel drum
- Clean filter indicator light
- End-of-cycle buzzer
- Child lock
- Reversible door
- Automatic direct drain Interior drum light
- ENERGY STAR® qualified
- 24-h time delay

Technical Information

- Dimensions (H x W x D): 33 1/4 x 23 3/8 x 23 3/4 in Dimensions (H x W x D): 84.5 x 59.5 x 60.4 cm

DHP 24412 W: With chrome door DHP 24400 W: With white door







DV 17542



Air-Vented Drver

3.67 cu.ft loading capacity LED control

Jeans, Delicates, Permanent Press, Cottons/Regular, Timed Programs, Refresh, Mixed Fabric, Mini, Shirts

Main Features

- OptiSense Automatic sensor drying
- Bi-directional drum action
- Auto anti-creasing cycle · Aquawave structured stainless steel drum
- Clean filter indicator light
- End-of-cycle buzzer Child lock

- **Technical Information** • Dimensions (H x W x D): 33 1/4 x 23 3/8 x 21 3/8 in
- Dimensions (H x W x D): 84.5 x 59.5 x 54 cm

Color

DV 17542: White










MAXIMUM ENERGY ENERGY ENERGY STAF



HARMLESS COMPONENTS

Blomberg dishwashers are not only energy-efficient but also RoHS compliant. The products are built of 99.9% lead-free materials, and 85% of our components are recyclable.

BRUSHLESS DC™ MOTOR

Some tall tub models feature a Brushless DC Motor, which is an electric controlled innovative pump technology designed for the efficient use of natural resources and of your time.

A Madison Your Appliance Authority 800-570-3355



From a sensor management system that automatically monitors the soil level of dishes to premium flexible racks that create extra space for your cutlery, espresso cups, and tall wine glasses, experience harmony in your kitchen with the Blomberg Dishwasher Series. Every model is built to include advanced technology that provides the most robust washing experiences, even for those with tiny kitchens.



IN HARMONY WITH YOU MAIN FEATURES



Electronic controls


The electronic display offers you a quick and easy way to select your programs. In addition, products with numerical display offer an "end of cycle audible signal," which reminds you that your wash cycle has finished and the dishes are ready to use. Also, the hidden control panel prevents your children from changing programs and playing with your dishwasher.


Blomberg® dishwashers perform well with all types of compact detergents.



Blomberg understands that your time is precious and provides a 30-minute quick wash program alternative for your lightly soiled dishes.



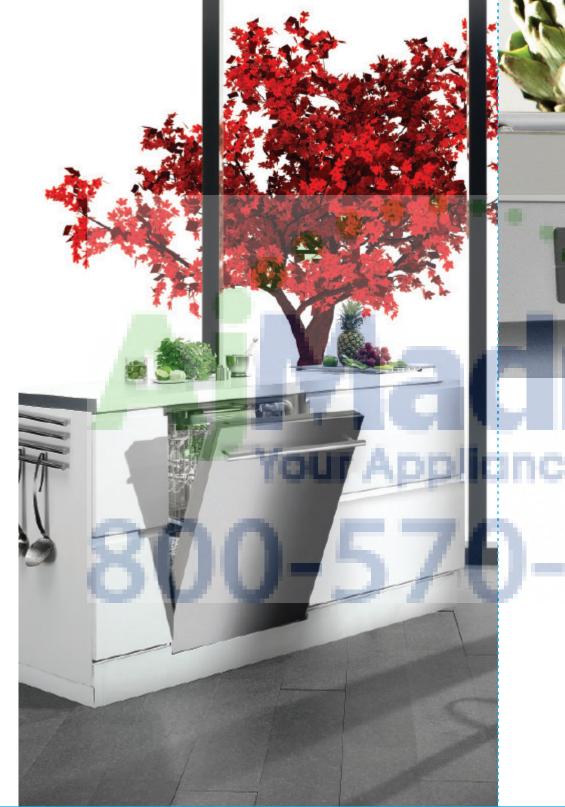



Multi flex racks with flip down tines in the lower rack and smartFOLD™ plate supports in the upper rack have been designed to maximize space in your dishwasher, allowing large items to be easily washed. With the flip-down shelves, you maximize space by using lower and upper parts of the shelf at the same time. You can wash long utensils and cappuccino/espresso cups all together, increasing capacity. What's more, the flip-down shelves in the upper rack can be positioned at different levels, allowing you to wash tall champagne flutes with short brandy glasses.



Height-adjustable Upper Rack

All Blomberg dishwashers have a height-adjustable upper rack, which can be raised to make room for pans, platters and baking trays in the bottom rack or lowered to accommodate tall glasses. Available in some models is **FlexiRack**, which allows you to adjust the rack height in one simple action even when the rack is fully loaded.

Sliding cutlery basket

Your Blomberg dishwasher's cutlery basket can be placed anywhere in the front row of the dishwasher by simply sliding it from side to side. Sliding cutlery basket is not available on 18" models.



smartFIT™ and smartBALANCE™

Blomberg developed a height adjustment mechanism called smartFIT™, which allows the rear feet to be adjusted from the front. In addition, fully integrated Blomberg dishwashers have a front adjustable hinge system, smartBALANCE™, which helps achieve a perfectly balanced door by adjusting the dishwasher to the height of your kitchen cabinet door.



Some of Blomberg's 2015 dishwasher models equipped with brushless motor technology have been recognized by the EPA as the Most Efficient 2015.

MAIN FEATURES



5 level wash

The 5 level wash system ensures immaculately clean dishes. The two spray arms, placed in the bottom and the middle of the dishwasher, and the third spray arm at the top spray water from every direction, reaching even the most remote parts of your dishes.

Silent operation

By utilizing three layers of insulation, including bituminous material, cotton insulation, and side walls, Blomberg® dishwashers are among the most quiet in the market. With advanced motor technology introduced in Blomberg models, noise levels are so low that you don't even have to run your dishwasher late at night.

SAFETY FEATURES

Stainless steel tank

Blomberg dishwashers are manufactured with the best stainless steel materials available, which not only protect dishwashers from heat and corrosion, but also sanitize your dishes with one of the highest washing temperatures available (167°F) in the dishwasher market.





Flow through heater

The heater is concealed to provide a safer and more convenient alternative to the conventional exposed heater. This allows plastic dishware to be placed on both top and bottom racks without damage.

Pots and pans plus 167°F

The pots and pans plus program offers a technology that cares for your dishes and guarantees exceptional cleaning of the most soiled dishes at 167°F temperature.

3 way euro filtering system

The 3 way euro filtering system removes even the smallest dirt particles and ensures circulation of clean water.

DMF:

All Blomberg dishwashers have a double motion float system (DMFS) and a bottom tray to prevent flooding. DMFS is an enhanced anti-leak system designed to provide maximum security against water damage. It is an intelligent mechanism that detects the source of excess water collection. The first float activates the drain pump, and the machine continues to run until the cycle is complete. If there is an operational problem, the second float level is involved to shut off the valve to stop water intake and drain the existing water until all the water inside the machine is discharged.



TALL TUB DISHWASHER FEATURES

Turbo fan drying

The additional fan included in some of the models will improve the drying performance of your dishwasher by means of active ventilation at the end of the washing cycle.

Inner illumination

Blomberg models in the DWT 57500 series are equipped with a brilliant interior white LED light activated with door opening and allowing you to see all dishes, even in dark environment.



FlexiDrawer removable 3rd rack

Some models feature a third rack to create extra space for your cutlery and espresso cups. What makes this rack special is that it still allows you to place tall stemware on the sides of the upper dishwasher basket. It can be completely and easily removed should you prefer to place tall objects in the middle of the upper rack as well.

Full folding tines for the lower rack

Some Blomberg models have a full flat lower basket to enable proper placing of large pots and pans. This way pots and pans are cleaned thoroughly.

Built-in water softener

Available in some models, the Blomberg water softener can help you reduce your water hardness to a manageable level and prevent your glasses and dishes from being etched.

Auto wash

Using an advanced sensor technology, the Blomberg sensor management system automatically monitors the soil level of your dishes and operates at the right temperature and length of time to deliver perfect washing results with optimum water and energy consumption. Just place your dishes in the machine, choose the auto wash cycle, and the job is as good as done.

TALL TUB DISHWASHERS

DWT 25300 Series

DWT 24100 Series



14 Place Settings Thin Panel Front-Control LCD Display

Main Features

- 4 programs 3 wash temperatures
- Condensing drying system
- 50 dBA wash noise level
- Program follow-up display
- Time delay up to 9.5 hrs.
- Allin1 tablet detergent function
- 1/2 load function
- 3 way euro filtering system
- smartFIT™ front adjustable rear feet
- Interior high loop with air gap
- Power plug

Interior Design

- All stainless steel tank
- 3 spray arms (lower, upper, and ceiling)

Base Rack Loading System

- Unloaded adjustable upper rack
- Upper-rack handle
- 2 adjustable mug shelves
- Sliding cutlery basket
- Fixed lower-rack tines

DWT 24100 W: White

- DWT 24100 B: Black
- DWT 24100 SS: Stainless steel

ALLIN]














DWT 25500 Series



14 Place Settings Thin Panel Front-Control LCD Display

Main Features

- 3 wash temperatures
- Condensing drying system
- 50 dBA wash noise level Program follow-up display

Thin Panel Front-Control LCD Display

- Time delay up to 9.5 hrs.
- Allin1 tablet detergent function
- 1/2 load function

14 Place Settings

Main Features

5 programs

- 3 wav euro filtering system
- smartFIT™ front adjustable rear feet
- Interior high loop with air gap
- Power plug

- All stainless steel tank
- 3 spray arms (lower, upper, and ceiling)

Premium Rack Loading System FlexiDrawer removable 3rd rack

- FlexiRack™ loaded adjustable upper rack
- Upper-rack handle
- 4 adjustable mug shelves
- Sliding cutlery basket
- smartFOLD™ plate supports on lower rack
- Stainless Blomberg® embossed lower-rack handle

- DWT 25300 W: White DWT 25300 B: Black
- DWT 25300 SS: Stainless steel

ALLIN]




















ALLIN





DWT 54100 Series



14 Place Settings

- 5 programs
- 3 wash temperatures
- Brushless DCTM motor
- Turbo fan drying
- 46 dBA wash noise level
- Program follow-up display
- Time delay up to 9.5 hrs.
- Allin1 tablet detergent function 1/2 load function
- 3 way euro filtering system
- smartFIT™ front adjustable rear feet
- Interior high loop with air gap
- Power plug

Interior Design


- All stainless steel tank
- 3 spray arms (lower, upper, and ceiling)

Ultra-Premium Rack Loading System

- FlexiDrawer removable 3rd rack
- FlexiRackTM loaded adjustable upper rack
- Upper-rack handle with stainless insert
- 4 adjustable mug shelves
- Sliding cutlery basket
- smartFOLD™ plate supports on lower rack Stainless Blomberg embossed lower-rack handle

- DWT 25500 W: White
- DWT 25500 B: Black
- DWT 25500 SS: Stainless steel





Top-Control LCD Display

- Main Features
- 4 programs 3 wash temperatures
- Condensing drying system 50 dBA wash noise level
- Program follow-up display
- Time delay up to 9.5 hrs.
- Allin1 tablet detergent function
- 1/2 load function
- 3 way euro filtering system
- smartFIT™ front adjustable rear feet
- smartBALANCETM front adjustable hinge system • smartPINTM joint handle system
- Interior high loop with air gap

Power plug Interior Design

All stainless steel tank

• 3 spray arms (lower, upper, and ceiling) Base Rack Loading System

- Unloaded adjustable upper rack Upper-rack handle
- 2 adjustable mug shelves

• DWT 54100 FBI: Fully integrated

Sliding cutlery basket Fixed lower-rack tines

• DWT 54100 SS: Stainless steel

- DWT 55300 W: White DWT 55300 B: Black

ALLIN]









DWT 55300 Series/DWT 55200 SSWS



14 Place Settings **Top-Control LCD Display**

Main Features

- 3 wash temperatures
- Condensing drying system
- Program follow-up display
- Time delay up to 9.5 hrs Allin1 tablet detergent function
- 1/2 load function 3 way euro filtering system
- smartFIT™ front adjustable rear feet
- smartBALANCE™ front adjustable hinge system smartPIN™ ioint handle system
- Interior high loop with air gap
- Built-in water softener (DWT 55200 SSWS)

• Electronic salt display (DWT 55200 SSWS)

- All stainless steel tank 3 spray arms (lower, upper, and ceiling)
- **Premium Rack Loading System** FlexiDrawer removable 3rd rack (excl. DWT 55200 SSWS)
- FlexiRack™ loaded adjustable upper rack
- Upper-rack handle 4 adjustable mug shelves
- Sliding cutlery basket smartFOLD™ plate supports on lower rack

Stainless Blomberg embossed lower-rack handle

- DWT 55300 SS/DWT 55200 SSWS: Stainless steel DWT 55300 FBI: Fully integrated











DWT 55500 SS

14 Place Settings **Top-Control LCD Display**

- Main Features
- 3 wash temperatures Brushless DC™ motor
- 46 dBA wash noise level
- Time delay up to 9.5 hrs.
- Allin1 tablet detergent function • 1/2 load function
- 3 way euro filtering system smartFIT™ front adjustable rear feet

smartPIN™ ioint handle system Interior high loop with air gap

Interior Design All stainless steel tank

- Premium Plus Rack Loading System
- FlexiDrawer removable 3rd rack FlexiRack™ loaded adjustable upper rack
- Upper-rack handle with stainless insert
- smartFOLD™ plate supports on lower rack Stainless Blomberg embossed lower-rack

DWT 55500 SS: Stainless steel



ALLIN]



DWT 57500 Series

Most Efficience 2015



- 4 wash temperatures Auto sensor controlled program
- Interior LED illumination

14 Place Settings

Main Features

7 programs

Top-Control LCD Displa

- 45 dBA wash noise level Program follow-up display
- Time delay up to 9.5 hrs.
- 1/2 load function 3 way euro filtering system
- smartFITTM front adjustable rear feet smartBALANCETM front adjustable hinge system smartPIN™ joint handle system

Interior high loop with air gap Power plug

- 3 spray arms (lower, upper, and ceiling) Interior Design All stainless steel tank
 - White LED interior illumination • 3 spray arms (lower, upper, and ceiling)
- 4 adjustable mug shelves





DW 24100 Series



14 Place Settings Thin Panel Front-Control LCD Display

- Main Features 4 programs 3 wash temperatures
- · Condensing drying system 50 dBA wash noise level
- Time delay up to 9.5 hrs.
- Allin1 tablet detergent function 1/2 load function

Program follow-up display

 3 wav euro filtering system smartFIT™ front adjustable rear feet Interior high loop with air gap

Power plug

- 3 spray arms (lower, upper, and ceiling)
- Base Rack Loading System Unloaded adjustable upper rack

Fixed lower-rack tines

DW 24100 W: White

DW 24100 B: Black

ALLIN]

DW 24100 SS: Stainless steel

All stainless steel tank

 Upper-rack handle Ultra-Premium Rack Loading System 2 adjustable mug shelves FlexiDrawer removable 3rd rack Sliding cutlery basket

Sliding cutlery basket smartFOLD™ plate supports on lower rack Stainless Blomberg embossed lower-rack handle

4 adjustable mug shelves



FlexiRack™ loaded adjustable upper rack

Upper-rack handle with stainless insert

ALLIN'



DW 55100 Series

14 Place Settings

Main Features

5 programs

Top-Control LCD Display

3 wash temperatures

Condensing drying system

50 dBA wash noise level

Time delay up to 9.5 hrs.

1/2 load function

Power plug

Interior Design

All stainless steel tank

Upper-rack handle

ALLIN

Sliding cutlery basket

4 adjustable mug shelves

• DW 55100 SS: Stainless steel

DW 55100 FBI: Fully integrated

Program follow-up display

Allin1 tablet detergent function

smartPINTM joint handle system

Interior high loop with air gap

smartFIT™ front adjustable rear feet

• 3 spray arms (lower, upper, and ceiling)

FlexiRack™ loaded adjustable upper rack

smartFOLD™ plate supports on lower rack

Stainless Blomberg embossed lower-rack handle

Premium Rack Loading System

smartBALANCETM front adjustable hinge system

3 way euro filtering system

STANDARD/SLIM TUB DISHWASHERS



8 Place Settings **Top-Control LCD Display**

Main Features 4 programs

- 3 wash temperatures Condensing drying system
- 48 dBA wash noise level Program follow-up display

Power plug

 Time delay up to 9.5 hrs. Allin1 tablet detergent function 1/2 load function

The Asset of the Party

- 3 way euro filtering system smartFIT™ front adjustable rear feet
- smartBALANCETM front adjustable hinge system. smartPIN™ joint handle system

Interior Design All stainless steel tank

Interior high loop with air gap

• 3 spray arms (lower, upper, and ceiling) **Premium Rack Loading System**

FlexiRackTM loaded adjustable upper rack Upper-rack handle 4 adjustable mug shelves

Cutlery basket

 DWS 54100 SS: Stainless steel DWS 54100 FBI: Fully integrated

ALLIN]



smartFOLD™ plate supports on lower rack









ENVIRONMENTALLY FRIENDLY COOKING

Preservation of natural resources is a priority for Blomberg®, where not only our production facilities are environment-conscious, but also all our products. All Blomberg wall ovens are not only energy-efficient but also RoHS compliant. The products are built of 99.9% lead-free materials, and 85% of our components are recyclable.

COOKING APPLIANCES

Blomberg introduces an outstanding collection of cooking appliances with advanced state-of-the-art designs. All Blomberg cooking appliances feature environmentally friendly, safe, and functional components to make them a harmonious part of your home. In addition, the 24100 model series comes with a true European convection system for a three-dimensional cooking system.



BUILT-IN WALL OVEN FEATURES



3D cooking

3D cooking is an advanced convection system that uses an additional heating element, which surrounds the cooking fan located at the back of the oven, for a three-dimensional cooking effect. Through constant air circulation, food is cooked more uniformly throughout. This function allows you to cook large pieces such as a big turkey or meat perfectly.

Robust handle

All Blomberg® ovens feature the robust, elegantly finished straight stainless handle. The same handle is used in other Blomberg appliances such as refrigerators and our dishwasher line-up in order to create a uniform look in your kitchen.

Programmable electronic timer

Blomberg ovens feature electronic timers that show the time of day and allow you to preset the start time, duration, or end of cooking. When the set cooking time ends, the oven switches itself off automatically and warns you with an audio signal.



Full glass door with large window

Blomberg ovens are designed with a wide, transparent glass window to allow you to see the oven interior without having to open the door, avoiding heat and energy loss during the cooking cycle. In addition, the door has multiple glass panels to keep the full heat inside the oven and reflect minimum heat outside of the unit when cooking is in progress. All models have easily removable doors for a thorough wipe of the door itself or to allow easy access to the oven cavity. In certain models the glass window is also removable to allow you to clean the glass separately.

Stylish details

By concealing the top heater, Blomberg has not only maximized the cooking space but also given it a smooth, elegant look inside the wall oven. The special Easy Clean gray enamel coating is another stylish design element featured on Blomberg ovens.

Fan-assisted cooking

The circular heater and the fan motor operate together. This function allows heat to be distributed evenly in the center of our oven. In this setting, you can cook 3 different dishes at the same time without blending their flavors or aromas.



CRAFTED IN HARMONY WITH YOUR COOKING

Interior lighting

To allow you thorough and easy observation of the cavity, Blomberg ovens feature interior lighting with cylindrical lamps placed on the rear wall. Gray-color cavity surface reduces reflection on the glass doors.

Large cavity

Blomberg BWOS 24102 and BWOS 24202 models have extended cavities by up to 20% to maximize the joy of cooking and dining. Blomberg ovens offer one of the largest spaces in the market in this class with 65-liter (2.3 cu.ft) cavity for conventional and multifunction ovens and they come with bigger-sized trays. You no longer have to worry about fitting the Thanksgiving turkey in your oven or the tray. In addition, three separate dishes can be cooked at the same time by placing each to any 5 different levels in the cavity.

CLEANING FEATURES





Easy Clean enamel

Blomberg oven cavities are coated with Easy Clean, exclusive, nonporous, gray enamel. This long lasting finish gives an elegant look and allows easy, quick, and ecologic cleaning of the oven cavity and trays.

Smooth cav

With no visible screws or connection points, the surface of the Blomberg oven cavity is smoother than ever. The smooth surface eliminates the risk of food and dirt particle collection and enables easy cleaning.

Easy-to-remove side racks

Blomberg ovens are equipped with wire racks easily removed by hand, which provide effortless access to the oven sidewalls, enabling complete cavity cleaning with minimal effort.

SAFETY FEATURES

luto shut-down

Your Blomberg electronic oven will automatically shut itself down after six hours of operation (except during warm keeping and defrost functions). You no longer need to ask yourself if you've remembered to turn off the oven before leaving home.

lden top heater

The top heater in Blomberg ovens is hidden, eliminating the risk of self injury when reaching the top shelf. In addition, it minimizes the temperature of the oven handle and knobs for a safe touch.

ualitv tested

For long time expectancy, 100% of Blomberg ovens are tested before they leave the factory. In addition, random accelerated-life tests are performed on products.



FREESTANDING RANGE FEATURES



3D cooking

3D cooking is an advanced convection system that uses an additional heating element, which surrounds the cooking fan located at the back of the oven, for a three-dimensional cooking effect. Through constant air circulation, food is cooked more uniformly throughout. Furthermore, it is possible to cook three different dishes at the same time without mixing their favors or aromas.

Cast iron grates

Stylish and elegantly designed cast-iron grates not only give Blomberg® gas ranges a close-to-pro look, but also provide maximum durability and safety and enable use of various sizes of pots and pans over the range too.



Programmable electronic timer

Blomberg cookers feature electronic timers that show the time of day and allow you to preset the start time, duration, or end of cooking. When the set cooking time ends, the oven switches itself off automatically and warns you with an audio signal.

Electronic ignition integrated into the knob

Igniting Blomberg gas burners is much quicker and easier with the integrated knob ignition system. Simply press and turn the dial for instant auto ignition, and you are ready to cook.



Easy-glide storage drawers

The robustly designed storage drawer is ideal for the storage of oven accessories. Furthermore, its side rollers and easy-glide mechanism make it easy to use.



CLEANING FEATURES





Easy Clean gray enamel

All Blomberg oven cavities are coated with exclusive, long-lasting, nonporous enamel, which is attractive and makes cleaning extremely easy—a damp cloth is all you need! Blomberg also coats the baking trays with Easy Clean gray enamel to help keep your oven looking new and clean.

mooth cavity

With no visible screws or connection points, the surface of the Blomberg oven cavity is smoother than ever. The smooth surface eliminates the risk of food and dirt particle collection and enables easy cleaning.

Glass inner surface

A full glass inner surface of the oven door is a special feature in top-of-the-range Blomberg cooking appliances. The oven doors feature three layers of glass to minimize the exterior temperature of the oven while also reducing heat loss. These layers, incorporated in a single sheet of glass, allow easy cleaning and can be safely used to place plates and dishes on. The oven door can also be easily removed for a quick reach to the oven cavity.

Easy-to-remove side racks

Blomberg ovens are equipped with hand-removable wire racks, which provide effortless access to the oven sidewalls, enabling complete cavity cleaning with minimal effort.

SAFETY FEATURES

Residual heat indicator

Residual heat indicators on the ceramic glass cooktop warn you if the cooking zone is not cool enough to touch safely.

Hidden top heate

The top heater in Blomberg ovens is hidden, eliminating the risk of injury when reaching the top shelf. In addition, it minimizes the temperature of the oven handle and knobs for a safe touch.

Quality teste

For long time expectancy, 100% of Blomberg ovens are tested before they leave the factory. In addition, random accelerated life tests are performed on products.

Flame failure safety device

All Blomberg gas cooking burners are equipped with a flame failure safety device that will cut the gas supply automatically, preventing any leakage of gas.

Ovens Cooking Functions



Bottom heater

Only the bottom heater is in operation. This function is ideal for slow cooking and for baking pizza and pastries where the base needs more crisping than the top.



The top and bottom heaters are in operation. The bottom heater will cook the base and the middle of the food while the top heater is used for browning. This function is ideal for stews, casseroles, pastries, and meats.



The full grill is in operation. This function is ideal for grilling and browning larger quantities of food.



Fan cooking

The circular heater and the fan motor operate together. The heat in the oven is distributed evenly in the center. In this setting, you can cook three different dishes at the same time without blending their flavors or aromas.



Low grill + fan (built-in ovens)

The mid part of the grill and the fan motor operate together. This function is ideal for perfect browning of food placed on the top shelf and warming food on lower shelves.



Grill + fan (freestanding ovens)
The full grill and fan motor operate together. This function is ideal for lean meats and fish.



Conventional + fan

The bottom and top heaters operate together with the fan motor. This function is ideal for using the whole oven, with particular focus on browning and base heat.



The fan motor is in operation. This function is ideal for defrosting delicate foods like cakes and pastries.



Top, bottom, and central heaters operate together with the fan motor. This function allows you to cook large pieces such as a big turkey or meat perfectly.



IN HARMONY WITH YOU **CERAMIC COOKTOP FEATURES**

Elegant design

Blomberg[®] ceramic cooktops have scratch-free. easy-to-clean smooth surfaces, providing clean and modern looks thanks to their frameless finish.

Blomberg CTE 36500 model has a timer that allows you to set a separate cooking time for each cooking zone. When the cooking time is up, the cooktop will automatically switch off the zone and a buzzer will signal the end of cooking.

When the cooking zone is not cool enough to touch safely, the residual heat indicators warn you with a visible red indicator on the cooktop surface. The child lock prevents children from changing the cooking settings, by locking the controls. The overflow protection system automatically shuts off the power in case of liquid boiling over onto the control panel. Also, the cooktop automatically switches itself off if the zone is left on for a long period of time.

Easy controls

Blomberg electric cooktops have touch slider or touch-sensitive front controls that are practical and allow precise temperature settings. Each heating zone is also operated by a separate touch point so that power levels on each individual cooktop can easily be regulated

Fingerprint-free stainless steel

A selection of stainless steel models in the range have fingerprint-free panel and doors so you won't have to worry about leaving behind a mark.







BUILT-IN WALL OVENS

BWOS 30100



Electronic Multifunction Oven

Mechanical Display

2.8 cu.ft (78 L) 7 Cooking Functions

Cooking Function

Convection Bake, Convection Boil, Convection Roast Broil, Dehydrate, Fast Preheat, Self-Clean

- Removable full width glass inner door
- Oven light with door opening
- Quadruple-glazed cool door

- Smooth surface
- Easy Clean enamel
- 4 level embossed racks Interior light

Accessories

Technical Information

- Dimensions (H x W x D): 23 3/16" x 29 3/8" x 22 1/16"
- Dimensions (H x W x D): 589 x 745 x 560 mm
- KW/Amps rating at 240V, 60Hz: 3.625kW 15.6Amps
- KW/Amps rating at 208V, 60Hz: 3.529kW 17.4Amps

Color

Stainless steel



BW0S 24102



Electronic Multifunction Oven

Programmable Digital Display

Broil, Fast Preheat, 3D, Defrost

Removable full width glass inner door

Convection Bake, Convection Broil, Convection Roast, Bake,

Dimensions (H x W x D): 23 3/8" x 23 3/8" x 22 3/9"

KW/Amps rating at 240V, 60Hz: 2.374W / 9.89Amps

KW/Amps rating at 208V, 60Hz; 1.783W / 8.57Amps

Dimensions (H x W x D): 594 x 595 x 567 mm

2.3 cu.ft (65 L)

8 Cooking Functions

Cooking Function

Main Features

Door-closed grilling

Triple-glazed door

Smooth surface

Interior light

Accessories

Wire shelf


Stainless Steel

Easy Clean enamel

5 level removable side racks

Technical Information

Cavity





BW0S 24202



Electronic Multifunction Oven

Programmable Digital Display 2.3 cu.ft (65 L) 8 Cooking Functions

Cooking Function

Convection Bake, Convection Broil, Convection Roast, Bake, Broil, Fast Preheat, 3D, Defrost

Main Features

- Door-closed arilling
- Removable full width glass inner door
- Triple-glazed door

Cavity

- Smooth surface
- Easy Clean enamel
- 5 level removable side racks Interior light

Accessories Wire shelf

Technical Information

- Dimensions (H x W x D): 23 3/8" x 23 3/8" x 22 3/9"
- Dimensions (H x W x D): 594 x 595 x 567 mm
- KW/Amps rating at 240V, 60Hz: 2.374W / 9.89Amps
- KW/Amps rating at 208V, 60Hz: 1.783W / 8.57Amps

Stainless steel









FREESTANDING RANGES

BERU/BERC 24100 SS



24" (60 cm) Convection Electric Range Convection Range **Smoothtop Cooking Zones**

Oven Cavity

- Digital programmable timer
- 2.3 cu.ft (65 L) oven cavity
- 8 functions: Defrost, Static, Static + Fan, Fan Heating (Turbo), Bottom Heater, Low Grill + Fan, Grill, 3D
- Closed-door grilling
- Easy Clean gray enamel
- Oven light
- Full width glass inner door

 4 vitroceramic burners: Q120/210 mm 1800W = 4.7/8.2 inch (double zone)Q140 mm 1200W = 5.5 inch Q160 mm 1500W = 6.3 inch Q210 mm 2200W = 8.3 inch

Additional Features

- Easy glide storage drawer
- Adjustable feet

Accessories Wire shelf

- Splash back, stainless (included)
- Technical Information
- Dimensions: (H x W x D): 35.4" X 23.6" X 23.6"
- Dimensions: (H x W x D): 900 X 600 X 600 mm
- Net Weight: 130 lb / 59 kg

- BERC 24100 SS: Stainless steel (Canada) with 40 A power cable
- BERU 24100 SS: Stainless steel (USA)



BERU/BERC 24200 SS



24" (60 cm) Non-Convection Electric Range Non-Convection Range Smoothtop Cooking Zones

Oven Cavity

- Mechanical timer
- 2.4 cu.ft (67.5 L) oven cavity
- 4 Functions: Upper Heater, Bottom Heater, Low Grill, Grill
- Closed-door grilling
- Easy Clean gray enamel
- Oven light
- Full width glass inner door

Cooking Zones

 4 vitroceramic burners: Q180 mm 1800W = 7 inch Q140 mm 1200W = 5.5 inch Q140 mm 1200W = 5.5 inch

Q210 mm 2200W = 8.3 inch

Additional Features

- Flap door storage
- Adjustable feet

Accessories

- Wire shelf
- Splash back (optional)

Technical Information

- Dimensions: (H x W x D): 35.4" X 23.6" X 23.6"
- Dimensions: (H x W x D): 900 X 600 X 600 mm
- Net Weight: 146 lb / 66 kg

- BERU 24200 SS: Stainless steel (USA)
- BERC 24200 SS: Stainless steel (Canada) with 40 A power cable



BGR 24100 SS



24" (60 cm) Gas Range Gas Range Gas Burners

Oven Cavity

- 2.3 cu.ft (65 L) oven cavity
- Gas grilling
- Easy Clean gray ename
- Oven light
- Full width glass inner door

Cooking Zones 4 gas burners:

2900W = 10,000btu 2000W = 7,000btu1000W = 3,500btu

2000W = 7.000btu

 Cast iron pan supports Electronic ignition integrated into the knob

Flame failure safety device

Additional Features

Flap door storage Adjustable feet

Accessories |

Wire shelf

Technical Information

- Dimensions: (H x W x D): 35.4" X 23.6" X 23.6"
- Dimensions: (H x W x D): 900 X 600 X 600 mm Net Weight: 134.5 lb / 61 kg


BGR 24100 SS: Stainless steel



CTE 36500



COOKTOPS



36" Electric Smoothtop Cooktop

Touch Slider Sensitive Front Contro Digital Display

5 Vitroceramic Zones

Main Features

- 9 cooking levels per zone
- 5 vitroceramic zones
- 3 x 1800W 7"
- 2500W / 1600W / 800W 9" / 7" / 5
- 1200W 6"
- On/off indicator

Safety

- Individual residual-heat indicators

Technical Information


- Dimensions (H x W x D): 3 9/32" x 36" x 21"
- Dimensions (H x W x D): 84 x 914 x 533 mm

Frameless black glass



CTE 30400





30" Electric Smoothtop Cooktop

Touch Sensitive Front Control Digital Display

4 Vitroceramic Zones

Main Features

- 9 cooking levels per zone
- 4 vitroceramic zones
- 2 x 1200W 6"
- 2500W / 1100W 9" / 6" • 2200W / 800W - 8" / 5"

On/off indicator

- Individual residual-heat indicators
- Key lock

Technical Information

- Dimensions (H x W x D): 3 9/32" x 30" x 21"
- Dimensions (H x W x D): 84 x 762 x 533 mm


Color

Frameless black glass



CTE 24402





24" Electric Smoothtop Cooktop

Manual Side-Mounted Control 4 Vitroceramic Zones

Main Features

- 6 cooking levels per zone
- 4 vitroceramic zones
- 2 x 1800 W 7"
- 2 x 1200 W 5.5" On/off indicator

Individual residual heat-indicators

- Technical Information Dimensions (H x W x D): 3 1/4" x 24 1/8" x 20 7/8"
- Dimensions (H x W x D): 82 x 614 x 532 mm

Color

Stainless steel frame





REFRIGERATORS

MODEL	BRFD 2650 SSN	BRFB 1822 SS	BRFB 1822 SSL	BRFB 1812 SS	BRFB 1812 SSL	BRFB 1452 SSN	BRFB 1152 SSN	BRFB 1042 SERIES	BRFB 1050 FFBIN
Туре	Four Door French Door Refrigerator	Full Frost Free Bottom Freezer Refrigerator	Frost Free Bottom Freezer Refrigerator	Frost Free Bottom Freezer Refrigerator	Frost Free Bottom Freezer Refrigerator	Fully Integrated Frost Free Bottom Freezer Refrigerator			
Control System	Electronic control	Electronic control	Electronic control	Electronic control	Electronic control	Mechanical control	Mechanical control	Mechanical control	Electronic control
Cooling System	TRIO-CYCLE NO FROST COOLING	DUO CYCLE NO FROST COOLING	FROST FREE	FROST FREE	FROST FREE	DUO CYCLE NO FROST COOLING			
CAPACITIES									
Total Net Volume, cu.ft	23.3	16.2	16.2	16.2	16.2	13.8	9.8	8.8	8.4
L	661	458	458	458	458	391	279	249	238
Fresh Food Net Volume, cu.ft	15.4	11.1	11.1	11.1	11.1	10.8	7.2	6.2	6.1
Freezer Net Volume, cu.ft	435 8.0	313 5.1	313 5.1	313 5.1	313 5.1	305 3.0	205 2.6	175 2.6	173
I 166261 IVEL VOIGITIE, GU.IL	226	145	145	145	145	86	74	74	65
FRIDGE FEATURES	220	140	140	140	140	00	7.4	14	03
Water Dispenser	/	-	-	-	-	-	-	-	-
Electronic Control Display Type	Touch control	7 segment	7 segment	7 segment	7 segment	-	-	-	Touch control
Auto Defrost	✓	√	/	/	/	✓	✓	✓	/
Inner Illumination	White LED	White LED	White LED	White LED	White LED	White LED	White LED	White LED	White LED
Shelves	3 safety glass	3 safety glass	3 safety glass	3 safety glass	3 safety glass	3 safety glass	3 safety glass	3 safety glass	3 safety glass
Crispers	2	1	1	1	1	2	1	1	1
Door Racks	6	3	3	3	3	4	4	3	3
Wine Rack	-	✓	√	√	✓	<i></i>	√ /	<i></i>	-
Bottle Gripper Egg Tray	1 transparent / 15 egg holder	2 opaque / 6 egg holder	2 opaque / 6 egg holder	2 opaque / 6 egg holder	2 opaque / 6 egg holder	2 opaque / 6 egg holder	2 opaque / 6 egg holder	2 opaque / 6 egg holder	2 opaque / 6 egg holder
Compressor	Variable speed VCC	Variable speed VCC	Variable speed VCC	Variable speed VCC	Variable speed VCC	Variable speed VCC	Variable speed VCC	Variable speed VCC	Variable speed VCC
Fan Ventilation	Variable opeca vec	J	/ variable opecia vee	/	/ variable opecia vee	-	-	-	/
FLEXI ZONE					·				
Total Net Volume, cu.ft	3.99	-	-	-	-	-	-	-	-
L	113	-		-	-	-	-	-	-
Number of Drawers	2			-	-	-	-	-	-
Number of Shelves	1		-	-	-	-	-	-	-
Adjustable Temperature Range	-10°F to +50°F			-	-	-	-	-	-
Auto Defrost		/	/	√	✓	√	√	√	√
Fast-Freeze Function		v		-	· ·		· ·	- ·	-
Number of Freezer Drawers	6	3	3	2	2	3	3	3	3
Number of Flaps				-	-	-	-	-	-
Automatic Ice Maker	/	1	/	-	-	-	-	-	-
Ice Cube Tray	-			✓	✓	✓	✓	✓	/
HYGIENE	process of the same								
Blue Zone	√	✓	1	/	√	-	-	-	-
hygAIR lonizing Technology		V	/	√	√	-	-	-	-
Hygiene+ Antibacterial Carbon Filter Antibacterial Seal	1		/	<i>J</i>	√ ✓	-	-	-	<i></i>
TECHNICAL INFORMATION	√	√	√	│	√	√	√	√	<i>y</i>
Supply Voltage, V/Hz	120 V / 60 Hz	120 V / 60 Hz	120 V / 60 Hz	120 V / 60 Hz	120 V / 60 Hz	120 V / 60 Hz	120 V / 60 Hz	120 V / 60 Hz	120 V / 60 Hz
Rated Current, A	1.5.A	1.7 A	1.7 A	1.7 A	1.7 A	1.5 A	1.5 A	1.5 A	2.1 A
Noise Level, dBA	47	44	44	44	44	42	42	42	39
DIMENSIONS									
Unpacked H x W x D, in	72 3/4 x 35 3/4 x 33 15/16	67 3/4 x 29 1/8 x 30 3/8	67 3/4 x 29 1/8 x 30 3/8	67 3/4 x 29 1/8 x 30 3/8	67 3/4 x 29 1/8 x 30 3/8	77 1/4 x 27 1/2 x 24 3/4	72 5/8 x 23 3/8 x 25 3/8	67 3/8 x 23 3/8 x 25 5/8	69 15/16 x 21 15/16 x 21 1/2
Unpacked H x W x D, cm	185 x 90.8 x 86.1	172 x 74 x 77	191.5 x 70 x 63	184.5 x 59.5 x 65	171 x 59.5 x 65	177.7 x 55.6 x 54.5			
Packed H x W x D, in Packed H x W x D, cm	77 1/4 x 41 3/8 x 37 1/2 196.3 x 104.9 x 95.2	71 5/8 x 31 7/8 x 31 1/8 182 x 81 x 79	71 5/8 x 31 7/8 x 31 1/8 182 x 81 x 79	71 5/8 x 31 7/8 x 31 1/8 182 x 81 x 79	71 5/8 x 31 7/8 x 31 1/8 182 x 81 x 79	78 x 30 1/4 x 27 3/4 198.3 x 76.9 x 70.4	76 15/16 x 26 1/8 x 26 3/4 192.9 x 66.4 x 67.9	70 1/16 x 26 1/4 x 26 3/4 178 x 66.4 x 67.9	72 15/16 x 23 1/2 x 23 1/2 185.3 x 59.7 x 59.7
Product Weight, Ib	196.3 X 104.9 X 95.2	182 X 81 X 79	182 X 81 X 79 213	182 X 81 X 79	182 X 81 X 79 198	198.3 X 76.9 X 70.4 165	192.9 X 66.4 X 67.9	178 X 66.4 X 67.9	165.3 X 59.7 X 59.7
Product Weight, kg	148	90	97	90	90	75	68	58	76
Packed Weight, lb	356	209	224	213	213	179	163	141	176
Packed Weight, kg	162	95	102	98	98	82	74	64	80
PERFORMANCE									
ENERGY STAR® Qualified	✓	✓	✓	✓	✓	√	√	✓	✓
Climatic Class	T	Т	T	T	Т	Т	T	T	T
Annual Energy Consumption, kWh/year	681	528	528	444	444	412	378	370	387
Cooling Gas	R134a	R600a	R600a	R600a	R600a	R600a	R600a	R600a	R600a
COLOR OPTIONS WH: White	-	✓	-	√	-	-	-	√	_
SL: Silver	-	√	-	✓	-	-	-	<i>J</i>	-
SS: Fingerprint-Free Stainless Steel		<u>-</u> ✓	- /			- /	- /		-
FFBIN: Fully Integrated	-	- v	-	- v	-	-	-	- v	/
			1						· · ·



WASHERS

MODEL		WM 98400 SX	WM 98200 SX	WM 77120
FEATURES				
Drum Volume	cu.ft	2.5	2.5	1.95
Washing Load Capacity	kg	10.1	10.1	7
<u> </u>	lb	22.2	22.2	15.4
	rpm	1400	1400	1200
Variable Spin Speed		√	/	/
Control		Digital display	Digital display	Electronic display
Time Delay		0–24 h	0–24 h	0-24 h
Remaining-Time Indicator			/	/
Program Follower			/	/
Automatic Water Adjustment Syst	tom	√	√	√
Automatic Detergent Dispensing Sy		✓ ✓	✓ ✓	<i>y</i>
	Stelli			<u> </u>
Automatic Temperature Control		✓	✓	✓
Sensorinse Suds Detection Syste	m	-	-	-
Bleach Dispenser		✓	✓	√
Unbalance Detection System		✓	✓	✓
Euro Wash System With Internal Water	r Heater	✓	✓	✓
Child Lock		✓	/	✓
Drum Material		Stainless steel with	Stainless steel with	Stainless steel
		aquawave structured	aquawave structured	
Removable Worktop				✓
CYCLES				
Number of Wash Cycles		16	16	12
Cottons / Regular Wash		-	-	✓
Normal		✓	/	-
Heavy Duty		✓	/	-
Permanent Press		✓	/	✓
Hand Wash		✓	1	✓
Delicates		✓	1	✓
Bulky		/	√	-
Woolens		/	√	✓
Drain + Spin		✓	✓	✓
Jogging Wear		/	√	✓
Whites		/	✓	-
Jeans		/	✓	√
Pet Hair Removal Plus		/	✓	-
Tub Sanitize		/	√	/
Baby		-	-	/
Quick Wash 35 min.		/	/	-
Super Quick 20 min.				
<u>'</u>		√	✓	-
Rinse		✓	✓	✓
FUNCTIONS				
Super Wash		-	-	✓
Soak		/	✓	✓
Extra Rinse		✓	✓	✓
Heavy Soil		✓	✓	-
Anti-Crease		-	-	✓
DIMENSIONS				
Product Dimensions (H x W x D)	in	33 1/8 x 23 3/8 x 24 5/8	33 1/8 x 23 3/8 x 24 5/8	33 1/8 x 23 3/8 x 24 3/8
	cm	84 x 59.5 x 62.5	84 x 59.5 x 62.5	84 x 59.5 x 62
Packed Dimensions (H x W x D)	in	35 x 25 5/8 x 26	35 x 25 5/8 x 26	34 5/8 x 25 5/8 x 24
	cm	89 x 66.5 x 66	89 x 66.5 x 66	88 x 65 x 66
Product Weight	kg	84	84	61
	lb	185.851852	185.851852	161
Packed Weight	kg	87	87	76
	lb	191.7989418	191.7989418	168
TECHNICAL FEATURES				
Voltage / Frequency		208-240V / 60Hz	208-240V / 60Hz	208-240V / 60Hz
Rated Current Amps		15	15	15
ENVIRONMENTAL STANDARDS				
ENERGY STAR® Qualified		√	√	/
Energy Consumption, kWh/year	-	117	117	136
RoHS** Compliant		√ / · · · · · · · · · · · · · · · · · ·		130
Color		V	· · · · · · · · · · · · · · · · · · ·	<u> </u>
OUIUI				
White		✓	✓	✓

DRYERS

MODEL	DHP 24412 W	DHP 24400 W	DV 17542
FEATURES			
Dryer Type cu.ft	Heat pump ventless	Heat pump ventless	Air-vented
Drum Volume	4.1	4.1	3.67
Dry Load Capacity kg	8.0	8.0	7.0
Ib	17.7	17.7	15.5
Control	Digital display		LED
		Digital display	
Program Follower	/	√ ·	✓ ·
Child Lock	√	√	✓
Clean Filter Indicator	√	✓	✓
Bi-Directional Drum Action	✓	✓	✓
Glass Door With Heat Protection	✓	√	✓
Reversible Glass Door	✓	✓	-
Automatic Water Drain	✓	✓	-
Interior Drum LED Lighting	✓	-	-
Delay Time	0-24 h	0-24 h	
	Stainless steel with	Stainless steel with	Stainless steel with
Drum Material	aguawave structured	aguawave structured	aguawave structured
Cycles			
Number of Cycles	16	16	15
Cottons / Regular Dry	/	1	/
Permanent Press	/	1	/
Mixed Fabric	1	/	/
Delicates	1	7	
	/	1	/
Bulky			-
Air Fluff / No Heat	✓	/	√
Woolens	1	√	
Jeans	1	1	1
Baby	/	1	
Silent Program	/	/	
Jogging Wear	/	1	
Super Quick 30 min.	1	/	
Timed Programs	10-20-30-40-50-60-70-	10-20-30-40-50-60- 70-80 -	15-30-75min.
	80-100-120-140-160 min.	100-120-140-160 min.	10-30-7011111.
FUNCTIONS			
Low Heat	-		/
Auto Anti-Creasing	/	/	/
Auto Cool-Down Phase	/	/	1
End-of-Cycle Buzzer	/	/	
DIMENSIONS			
	33 1/4 x 23 3/8 x	33 1/4 x 23 3/8 x	00.1/000.0/001.1/
Product Dimensions (H x W x D) in	23 3/4	23 3/4	33 1/2 x 23 3/8 x 21 1/
cm	84.6 x 59.5 x 60,4	84.6 x 59.5 x 60,4	85 x 59.5 x 54
Packed Dimensions (H x W x D) in	35 1/4 x 26 x 26 3/8	35 1/4 x 26 x 26 3/8	35 x 26 3/8 x 2 3 3/ 8
cm	89.5 x 66 x 67	89.5 x 66 x 67	90.5 x 67.5 x 59 .5
	52.5	52.5	35.5
Product Weight kg	116	116	79
			40
Packed Weight kg	56.5	56.5	
lbs -	125	125	89
TECHNICAL FEATURES			
Rated Current Amps	5A	5A	15A
Voltage / Frequency	208-240V / 60Hz	208-240V / 60Hz	208-240V / 60Hz
ENVIRONMENTAL STANDARDS			
ENERGY STAR Qualified	YES	YES	NO
Energy Consumption, kWh/year	190	190	379
RoHS** Compliant	1	/	/
STACKING KITS			
Kit 1 (Universal stacking kit): Can be			
mounted with all WM with any depth	-	-	2977200300
Kit 2: Can be mounted with all WM			
with 50-54-60 cm depth	2985400200	2985400200	2967100100
Color			
OUIOI			

TALL TUB DISHWASHERS

MODEL White	DWT 24100 W	DWT 25300 W	DWT 25500 W	_	DWT 55300 W	_	_	_
Black	DWT 24100 B	DWT 25300 B	DWT 25500 B	_	DWT 55300 B	_	_	_
Stainless Steel	DWT 24100 SS	DWT 25300 SS	DWT 25500 SS	DWT 54100 SS	DWT 55300 SS	DWT 55200 SSWS	DWT 55500 SS	DWT 57500 SS
Fully Integrated	-		- DIVI 23300 33	DW 54100 58	DWT 55300 FBI	- DIVI 30200 30113	-	DWT 57500 FBI
CONTROLS	_		_	DH 341001DI	DW1 33300 1 DI			DW1 373001 DI
Control Type	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Position	Front	Front	Front	Top	Тор	Top	Top	Тор
MAIN FEATURES	TTOTIC	TTOTIC	TTOTIE	100	100	Тор	100	100
Loading Capacity (Place Settings)	14	14	14	14	14	14	14	14
Tub Material	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Inner Door Material	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Interior Illumination	-	-	-	-	-	-	-	1
Water Softener	-	-	-	-	-	/	-	-
DMFS Overflow Protection	/	1	1	1	/	/	1	1
5 Level Wash With 3rd Spray Arm	/	1	1	1	1	1	1	1
Delay Timer Up to 9.5 hrs	/	./		1	1	1	1	1
3 Way Euro Filter		./	./	./	1	./		-/
Drying Drying	Condensation	Condensation	Turbo Fan	Condensation	Condensation	Condensation	Turbo Fan	Turbo Fan
Brushless DC TM Motor	-		Tuibo Faii √	-			Tuibo Faii √	IUIDU FaII
Turbidity Sensor	/	/	<i>y</i>	/	/	/	<i>y</i>	√ √
Silence Level, dBA	50 dBA	50 dBA	46 dBA	50 dBA	50 dBA	50 dBA	46 dBA	45 dBA
Allin1 Tablet Function	50 UBA	JU UBA	40 UBA	JU UBA	JU UBA	JU UBA	40 UBA	40 UBA ✓
1/2 Load Function	1	<i>y</i>	✓ ✓	/	1	<i>y</i>	✓ ✓	✓ /
SmartPIN TM Joint	V	√ ·	-	1	<i>y</i>	<i>y</i>	<i>y</i>	✓ ✓
Interior High Loop With Air Gap	/	1	1	1	<i>y</i>	<i>y</i>	<i>y</i>	
Power Plug								/
PROGRAMS	1	1	/	1	1	√	√	✓
		-	-	4	_		-	7
Number of Programs	4	5	5	4	5	5	5	-
Rinse & Hold		1	/	-	/	/	√	/
Quick Wash (131°F rinse temp)	1	1	1	✓ ·	/	✓ ·	✓ ·	✓ ·
China/Crystal (149°F rinse temp)	1	<i>J</i>	1	√	/	√	√	√
Regular Wash (142°F–145°F rinse temp)	1	1	1	✓	1	✓	1	√
Pots and Pans (158°F rinse temp)	-	-	-	-	-	-	-	/
Pots and Pans Plus (167°F rinse temp)	/	V	/	1	1	1	✓	1
Auto Program (131°F–149°Frinsetemp) DISPLAY	100			-	-	-	-	✓
Program Sequence	√ / LCD display	√ / LCD display	✓ / LCD display	√ / LCD display	✓ / LCD display	✓ / LCD display	✓ / LCD display	√ / LCD display
Rinse Aid Indicator	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Rinse Aid Indicator Display	/	/	/	1	1	1	1	1
Salt Indicator Display	-	_	-	-	-	1	-	-
RACK SYSTEM								
smartFOLD Lower-Rack Folding Tines		1	1	-	1	1	1	1
Lower-Rack Embossed Stainless Handle		1	1	-	1	1	1	1
Cutlery Basket	Sliding	Sliding	Sliding	Sliding	Sliding	Sliding	Sliding	Sliding
Upper Rack (inset shelves)	2	4	4	2	4	4	4	4
smartFOLD Upper-Rack Folding Tines	-	1	1	-	1	1	1	1
FlexiRack Adjustable Upper Rack	Unloaded	Loaded	Loaded	Unloaded	Loaded	Loaded	Loaded	Loaded
FlexiDrawer Removable 3rd Rack	- 1	/	/	-	1	-	1	1
Nylon Coated Racks DIMENSIONS	√	✓	✓	√	√	✓	√	√
Packed (H x W x D) in	35 x 25 3/16 x 26	35 x 25 3/16 x 26	35 x 25 3/16 x 26	35 x 25 3/16 x 26	35 x 25 3/16 x 26	35 x 25 3/16 x 26	35 x 25 3/16 x 26	35 x 25 3/16 x 26
cm	88.9 x 64.4 x 66.1	88.9 x 64.4 x 66.1	88.9 x 64.4 x 66.1	88.9 x 64.4 x 66.1	88.9 x 64.4 x 66.1	88.9 x 64.4 x 66.1	88.9 x 64.4 x 66.1	88.9 x 64.4 x 66.1
Packed Weight (lb/kg)	99/45	99/45	99/45	95/43	95/43	95/43	95/43	101/46
Unpacked (H x W x D) in	33 7/8 x 23 9/16 x 21 5/8	33 7/8 x 23 9/16 x 21 5/8	33 7/8 x 23 9/16 x 21 5/8	33 7/8 x 23 9/16 x 21 5/8	33 7/8 x 23 9/16 x 21 5/8	33 7/8 x 23 9/16 x 21 5/8	33 7/8 x 23 9/16 x 21 5/8	33 7/8 x 23 9/16 > 21 5/8
cm	86 x 59.8 x 54.8	86 x 59.8 x 54.8	86 x 59.8 x 54.8	86 x 59.8 x 54.8	86 x 59.8 x 54.8	86 x 59.8 x 54.8	86 x 59.8 x 54.8	86 x 59.8 x 54.8
Unpacked Weight (lb/kg)	93/42	93/42	93/42	101/46	101/46	101/46	101/46	95/43
ENVIRONMENTAL STANDARDS	00/12	00/72	1 00/12	101/-10	101/10	101/40	101/10	00/10
ENERGY STAR® Qualified	/	1	1	1	1	1	1	1
Energy Consumption, kWh/year	273	240	214	273	240	260	214	214
Water Consumption, gal/cycle	3.79	2.98	2.54	3.79	2.98	3.50	2.54	2.54
RoHS* Compliant	J.13	Z.50	<i>∠.</i> 54	J.13	Z.50	J.50	✓	<i>∠.</i> 54
	· *	· ·	· · · · · · · · · · · · · · · · · · ·	4		· ·	· · · · · · · · · · · · · · · · · · ·	. v

STANDARD/SLIM TUB DISHWASHERS

White	DW 24100 W	-	-
Black	DW 24100 B	_	-
Stainless Steel	DW 24100 SS	DW 55100 SS	DWS 54100 S
Fully Integrated	_	DW 55100 FBI	DWS 54100
CONTROLS			
Control Type	Electronic	Electronic	Electronic
Position	Front	Тор	Тор
MAIN FEATURES			
Loading Capacity (place settings)	14	14	8
Tub Material	Stainless steel	Stainless steel	Stainless ste
Inner Door Material	Stainless steel	Stainless steel	Stainless ste
Water Softener	-	-	-
DMFS Overflow Protection	1	✓	/
5 Level Wash With 3rd Spray Arm	1	1	/
Delay Timer Up to 9.5 hrs	1	1	/
3 Way Euro Filter	/	1	1
Drying	Condensation	Condensation	Condensatio
Turbidity Sensor	/	/	1
Silence Level, dBA	50 dBA	50 dBA	48 dBA
Allin1 Tablet Function	/	1	1
1/2 Load Function	/	1	1
SmartPIN™ Joint	-	✓	1
Interior High Loop With Air Gap	/	/	1
Power Plug	/	✓	/
PROGRAMS			
Number of Programs	4	5	4
Rinse & Hold	-	✓	-
Quick Wash (131°F rinse temp)	/	/	1
China/Crystal (149°F rinse temp)	/	✓	/
Regular Wash (142°F–145°F rinse temp)	✓	✓	/
Pots and Pans Plus (167°F rinse temp)	✓	✓	✓
DISPLAY			
Program Sequence	√ / LCD display	√ / LCD display	√ / LCD disp
Rinse Aid Indicator	Electronic	Electronic	Electronic
Rinse Aid Indicator Display	1	1	/
Salt Indicator Display	-	-	-
RACK SYSTEM			
smartFOLD Lower-Rack Folding Tines	-	/	1
Lower-Rack Embossed Stainless Handle	-	1	-
Cutlery Basket	Sliding	Sliding	Standard
Upper Rack (inset shelves)	2	4	2
smartFOLD Upper-Rack Folding Tines	-	1	/
FlexiRack Adjustable Upper Rack	Unloaded	Loaded	Loaded
Nylon Coated Racks	✓	✓	✓
DIMENSIONS			
Packed (H x W x D) in	34 3/8 x 25 3/16 x 26	34 3/8 x 25 3/16 x 26	34 3/8 x 19 3/ x 26
cm	85.9 x 64.4 x 66.1	85.9 x 64.4 x 66.1	85.9 x 49.4 x 6
Packed Weight (lb/kg)	93/42	97/44	90/41
Unpacked (H x W x D) in	32 1/4 x 23 9/16	32 1/4 x 23 9/16	32 1/4 x 17 3
Unpacked (T X W X D) III	x 21 5/8	x 21 5/8	x 21 5/8
cm	82 x 59.8 x 54.8	82 x 59.8 x 54.8	82 x 45 x 54
Unpacked Weight (lb/kg)	88/40	90/41	82/37
ENVIRONMENTAL STANDARDS			
ENERGY STAR Qualified	/	/	1
Energy Consumption, kWh/year	273	273	210
Water Consumption, gal/cycle	3.79	3.79	2.54

*Lead-free. *Lead-free.

BUILT-IN WALL OVENS

MODEL	BW0S 30100	BW0S 24102	BW0S 24202
SERIES			
Туре	Self clean	Built-in Oven	Built-in Oven
Size	30"	24"	24"
Color	Stainless Steel	Stainless Steel	Stainless Steel
Oven Type // Upper Oven Type	Multifunction (True Euro Convection)	Multifunction (True Euro Convection)	Multifunction (Tru Euro Convection)
Control type	Electronic	Electronic	Electronic
FUNCTIONS			
Pyrolitic Self-Clean With Automatic Door Latch	Yes	No	No
True European Convection	Yes	Yes	Yes
Bake (ring element)	Voc	Voc	Voo
Convection Broil Convection Roast	Yes Yes	Yes Yes	Yes Yes
Bake	Yes	Yes	Yes
Broil	Yes	Yes	Yes
Dehydrate	Yes	No	No
Fast Preheat	Yes	Yes	Yes
Defrost	No	Yes	Yes
SPECIAL FEATURES			
Automatic Fast Preheat	Yes	Yes	Yes
Electronic Lock	Yes	Yes	Yes
Sabbath Mode	Yes	No	No
12/24 Hours Clock Format	Yes	Yes	Yes
°C/°F Degree Unit	Yes	N/A	N/A
OVEN DOOR			
Oven Glass Window	Large See-Through Glass	Large See-Through Glass	Large See-Throug Glass
Door Cooling System	4-Pane Heat-	3-Pane Heat-	3-Pane Heat-
	Resistant Glass	Resistant Glass	Resistant Glass
OVEN CAVITY Net Capacity (cu.ft)	78 L / 2.78 cu.ft	65 L / 2.3 cu.ft	65 L / 2.3 cu.ft
	Black	Grav	Grav
Cavity Enameling Color			
Rack Positions	4 embossed	5 side rack	5 side rack
Oven Lights	2 x 20 W Halogen	1 x 25 W	1 x 25 W
Broil Upper Heating Element	3500 W (240V)	2200 W	2200 W
Upper Auxiliary Element Wattage	1032 W (240V)	1100 W	1100 W
Concealed Bake Lower Heating Element	3000 W (240V)	1200 W	1200 W
Convection Element Wattage	2500 W (240V)	1800 W	1800 W
ACCESSORIES OVEN // UPPER Chromed Racks	OVEN CAVITY	2	2
DIMENSIONS / WEIGHT			
Overall Dim - Width	29 3/8" (745 mm)	23 3/8" (595 mm)	23 3/8" (595 mm
Overall Dim - Height	23 3/16" (589 mm)	23 3/8" (594 mm)	23 3/8" (594 mm
Overall Dim - Depth	22 1/16" (560 mm)	22 3/9" (567 mm)	22 3/9" (567 mm
Cutout - Width*	28" (710 mm)	23 2/8" or 23 5/8" (590 mm or 600 mm)	23 2/8" or 23 5/8" (590 mm or 600 mr
Cutout - Height (min)	23" (585 mm)	22 3/64" (560 mm)	22 3/64" (560 mr
Cutout - Depth (min)	24" (610 mm)	21 3/4" (550 mm)	21 3/4" (550 mm
Overall Dim - Width (packed)	820 mm	26" (660 mm)	26" (660 mm)
Overall Dim - Height (packed)	750 mm	26" (660 mm)	26" (660 mm)
Overall Dim - Depth (packed)	690 mm	26" (660 mm)	26" (660 mm)
Net Weight (lb / kg)	148lb / 67kg	70lb / 32kg	70lb / 32kg
Brut Shipping Weight (lb / kg)	163lb / 74ka	79lb / 36ka	79lb / 36kg
POWER / RATINGS (208/240 V	, 60 Hz)	I JULI JUNG	1 July Juny
KW/Amps rating at 240V, 60Hz	3.625kW / 15.6Amps	2.374W / 9.89Amps	2.374W / 9.89Am
KW/Amps rating at 208V, 60Hz	3.529kW / 17.4Amps	1.783W / 8.57Amps	1.783W / 8.57Am
Cable + Conduit	Yes	Yes	Yes
INSTRUCTIONS FOR USE			
Use & Care Manual	EN, SP, FR	EN, SP, FR	EN, SP, FR

^{*}Min-max cutout width info is given for under-counter and column installations respectively.

COOKTOPS

MODEL	CTE 36500	CTE 30400	CTE 24402
Size	36"	30"	24"
Color	Black	Black	Black
Heating Technology	Radiant heaters	Radiant heaters	Radiant heaters
Glass Type	Glass ceramic	Glass ceramic	Glass ceramic
Stainless Steel Frame	Yes	N/A	Yes
Control Type	Touch control with slide TC	Touch control	Knob control
Control Features			
Slide Touch Control for Power Setting	Yes	N/A	N/A
Digital Display for Power Level Indication	5	4	N/A
Low Power Scale for Delicate Cooking	Yes	Yes	N/A
Command Lock	Yes	Yes	N/A
Automatic Fast Boil Function	Yes	Yes	N/A
Hot Surface Indication	Yes	Yes	Yes
Residual-Heat Indication	Yes	Yes	Yes
Timer Function	Yes	N/A	N/A
Timer Display	Yes	N/A	N/A
Acoustic Buzzer	Yes	Yes	N/A
Failure Codes Indication	Yes	Yes	N/A
Size and Power			
Front Left Zone	1800W - 7"	1200W - 6"	1800W - 7"
Bridge Element	800W	N/A	N/A
Rear Left Zone	1800W - 7"	2500W / 1100W - 9" / 6"	1200W - 5,5"
Central Zone	2500W / 1600W / 800W - 9" / 7" / 5"	N/A	N/A
Rear Right Zone	1800W - 7"	2200W / 800W - 8" / 5"	1800W - 7"
Front Right Zone	1200W - 6"	1200W - 6"	1200W - 5.5"
Dimensions/Weight			
Overall Dim Width	36" (914 mm)	30" (762 mm)	24 1/8" (614 mm)
Overall Dim Height	3 9/32" (84 mm)+ conduit 15/16" (24 mm)	3 9/32" (84 mm)+ conduit 15/16" (24 mm)	3 1/4" (82 mm)
Overall Dim Depth	21" (533 mm)	21" (533 mm)	20 7/8" (532 mm)
Cutout - Width (min-max)	34 1/16" (865 mm) - 34 5/16" (872 mm)	28 11/16" (729 mm) - 28 15/16" (735 mm)	22 3/5" (575 mm) - 22 4/5" (580 mm)
Box - Height	3 1/16" (78 mm)+ conduit 15/16" (24 mm)	3 1/16" (78 mm)+ conduit 15/16" (24 mm)	5 4/5" (150 mm)
Cutout - Depth (min-max)	19 19/64" (490 mm) - 19 5/8" (498 mm)	19 19/64" (490 mm) - 19 5/8" (498 mm)	19 1/2" (494 mm) - 19 5/8" (498 mm)
Approx. Ship Weight	19.4 kg (43 lb)	16.2 kg (36 lb)	12.5 kg (27.6 lb)
Power/Ratings (208/240 V, 60Hz)			
KW/Amps Rating at 240V, 60Hz	9.900kW - 41.25Amps	7.100kW - 29.58Amps	6.000kW - 25Amps
KW/Amps Rating at 208V, 60Hz	7.436kW - 35.75Amps	5.332kW - 25.63Amps	N/A
Cable + Conduit	Yes	Yes	Yes
INSTRUCTIONS FOR USE			
Use & Care Manual	EN, SP, FR	EN, SP, FR	EN, SP, FR
Installation Manual	EN, SP, FR	EN, SP, FR	EN, SP, FR

FREESTANDING RANGES

ODEL	BERC 24100 SS	BERU 24100 SS	BERC 24200 SS	BERU 24200 SS	BGR 24100 SS
уре	Electric Range	Electric Range	Electric Range	Electric Range	Gas Range
ize	24"	24"	24"	24"	24"
olor	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
ide Walls	BLACK	BLACK	BLACK	BLACK	BLACK
ven Type	Multifunction	Multifunction	Non-Convection	Non-Convection	Gas Grill / Gas Burner
ontrol Type	Digital	Digital	Mechanic	Mechanic	Manual Thermostat
UNCTIONS					
Multi-Dimensional Cooking	Yes	Yes			
onventional Cooking	Yes	Yes	Yes	Yes	
ottom Heater	Yes	Yes	Yes	Yes	
an ow Grill	Yes	Yes	Yes	Yes	
rill	Yes	Yes	Yes	Yes	Gas Grill (door closed)
an + Grill	Yes	Yes	103	103	das di ili (door closed)
an + Bottom + Top Heater	Yes	Yes			
an Heating (Turbo)	Yes	Yes			
PECIAL FEATURES	100	100			
2/24 Hours Clock Format	Yes	Yes			
plash Back	Yes	Yes	Optional	Optional	
ooling Fan	Yes	Yes	Yes	Yes	Yes
avity Enamelling Color	Gray	Gray	Gray	Gray	Gray
ven Lights	1 x 25 W	1 x 25 W	1 x 25 W	1 x 25 W	1 x 25 W
djustable Feet	Yes	Yes	Yes	Yes	Yes
nti-Tip (tilting) bracket	Yes	Yes	Yes	Yes	Yes
ottom Compartment / Storage	Drawer	Drawer	Drop down	Drop down	Drop down
as Type					G 20-20 Mbar - Natural Gas
pare Parts Description					LPG kit (included)
VEN DOOR(\$) ven Glass Window	Large See-Through Glass	Large See-Through Glass	Large See-Through Glass	Large See-Through Glass	Large See-Through Glass
oor Cooling System	3-Pane Heat-Resistant Glass (fixed)	3-Pane Heat-Resistant Glass (fixed)	3-Pane Heat-Resistant Glass (fixed)	3-Pane Heat-Resistant Glass (fixed)	3-Pane Heat-Resistant Glass (fixed
VEN CAVITY / UPPER OVEN CAVI	TY	_			
let Capacity (cu.ft)	65 L / 2.3 cu.ft	65 L / 2.3 cu.ft	67.5 L / 2.4 cu.ft	67.5 L / 2.4 cu.ft	65 L / 2.3 cu.ft
ottom Heating Element					
attage	1200 W	1200 W	1200 W	1200 W	
pper Heating Element	1100 W	1100 W	1100 W	1100 W	
Vattage			110011	-	
onvection Element Wattage ow Grill (Broil)	1800 W	1800 W	1100 W	1100 W	
rill (Broil)	2200 W	2200 W	2200 W	2200 W	
CCESSORIES / OVEN CAVITY	EE00 III	ELOU W	ZZOO W	2200 W	
ack Positions	5 side rack	5 side rack	5 side rack	5 side rack	5 side rack
thromed racks		0 0100 10010	2	2	
	2	2			2
	2	2	2	2	2
ООКТОР	2 Ceramic Halogen 4 zones	2 Ceramic Halogen 4 zones	Ceramic Halogen 4 zones	Ceramic Halogen 4 zones	2 4 Gas Zone
OOKTOP one Configuration	Ceramic Halogen 4 zones	Ceramic Halogen 4 zones	Ceramic Halogen 4 zones	Ceramic Halogen 4 zones	4 Gas Zone
OOKTOP one Configuration ront Left	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone)	Ceramic Halogen 4 zones Q120/210 mm 1800 W= 4.7/8.2 inch (double zone)	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch	4 Gas Zone 2.9kW=10000btu
OOKTOP one Configuration ront Left ear Left	Ceramic Halogen 4 zones Q120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu
OOKTOP one Configuration ront Left ear Left ront Right	Ceramic Halogen 4 zones Q120/216 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch 0160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu
OOKTOP one Configuration ront Left ear Left ront Right ear Right	Ceramic Halogen 4 zones Q120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu
OOKTOP one Configuration rort Left ear Left rort Right ear Right an Support Type	Ceramic Halogen 4 zones Q120/216 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch 0160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu Cast Iron
OOKTOP one Configuration ront Left ear Left ront Right ear Right an Support Type an Support Quantity	Ceramic Halogen 4 zones Q120/216 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch 0160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu Cast Iron 2
OOKTOP one Configuration ront Left ear Left ront Right ear Right ear Support Type an Support Quantity as Safety Device for Hob	Ceramic Halogen 4 zones Q120/216 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch 0160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu Cast Iron
controp cont Left ear Left cont Right ear Right an Support Type an Support Quantity as Safety Device for Hob as Safety Device for Oven	Ceramic Halogen 4 zones Q120/216 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch 0160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu Cast Iron 2 Yes
OOKTOP one Configuration ront Left ear Left ront Right ear Right ear Right an Support Type an Support Quantity as Safety Device for Hob as Safety Device for Oven IMENSIONS / WEIGHT	Ceramic Halogen 4 zones Q120/216 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch 0160 mm 1500 W=6.3 inch	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu Cast Iron 2 Yes
ooktop one Configuration ont Left ear Left ont Right ear Right an Support Type an Support Quantity as Safety Device for Hob as Safety Device for Oven IMENSIONS / WEIGHT verall Dim - Width (unpacked)	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch 0210 mm 2200 W=8.3 inch	Ceramic Halogen 4 zones 6120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch 0160 mm 1500 W=6.3 inch 0210 mm 2200 W=8.3 inch	Ceramic Halogen 4 zones 0180 mm 1800 W=7 inch 0140 mm 1200 W=5.5 inch 0140 mm 1200 W=5.5 inch 0210 mm 2200 W=8.3 inch	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW- 7000btu Cast Iron 2 Yes Yes
ooktop one Configuration ont Left ear Left ont Right ear Right an Support Type an Support Quantity as Safety Device for Hob as Safety Device for Oven IMENSIONS / WEIGHT verall Dim - Width (unpacked) verall Dim - Height (unpacked)	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch	Ceramic Halogen 4 zones 6120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch	Ceramic Halogen 4 zones 0180 mm 1800 W=7 inch 0140 mm 1200 W=5.5 inch 0140 mm 1200 W=5.5 inch 0210 mm 2200 W=8.3 inch 23.6" (600 mm)	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 236" (600 mm)	4 Gas Zone 2.9kW=10000btu 2kW=7000btu 1kW=3500btu 2kW=7000btu Cast Iron 2 Yes Yes 23.6" (600 mm)
OOKTOP One Configuration oront Left ear Left oront Right ear Right ear Right ear Right ear Support Quantity eas Safety Device for Hob as Safety Device for Oven IMENSIONS / WEIGHT werall Dim - Height (unpacked) werall Dim - Depth (unpacked) werall Dim - Depth (unpacked) werall Dim - Width (packed) werall Dim - Width (packed)	Ceramic Halogen 4 zones 0120/210 mm 1800W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm)	Ceramic Halogen 4 zones 9120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch 0160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 354" (900 mm)	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm)	Ceramic Halogen 4 zones	4 Gas Zone 2.9kW=10000btu 2kW=7000btu 1kW=3500btu 2kW=7000btu Cast Iron 2 Yes Yes 35.6" (600 mm) 35.4" (900 mm) 23.6" (600 mm)
ooktop one Configuration ont Left ear Left ont Right ear Right an Support Type an Support Quantity as Safety Device for Hob as Safety Device for Hob as Safety Device for Oven IMENSIONS / WEIGHT verall Dim – Width (unpacked) verall Dim – Depth (unpacked) verall Dim – Width (packed) verall Dim – Width (packed) verall Dim – Width (packed)	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 23.6" (600 mm)	Ceramic Halogen 4 zones G120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 354" (900 mm) 226" (660 mm) 40.3" (1025 mm)	Ceramic Halogen 4 zones 0180 mm 1800 W=7 inch 0140 mm 1200 W=5.5 inch 0140 mm 1200 W=5.5 inch 0210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 28.6" (600 mm) 28.6" (600 mm) 40.3" (1025 mm)	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 26" (660 mm) 40.3" (1025 mm)	4 Gas Zone 2.9kW=10000btu 2kW=7000btu 1kW=3500btu 2kW= 7000btu Cast Iron 2 Yes Yes 23.6" (600 mm) 35.4" (900 mm) 23.6" (660 mm) 40.3" (1025 mm)
ooktop one Configuration ront Left ear Left ront Right ear Right an Support Type an Support Quantity as Safety Device for Hob as Safety Device for Hob as Safety Device for Hob in Intensions / Weight verall Dim - Width (unpacked) verall Dim - Depth (unpacked) verall Dim - Height (packed) verall Dim - Height (packed) verall Dim - Height (packed) verall Dim - Depth (packed) verall Dim - Depth (packed) verall Dim - Depth (packed)	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 23.6" (600 mm) 40.3" (1025 mm) 27.6" (700 mm)	Ceramic Halogen 4 zones 91:20/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm 2200 mm 2200 W=8.3 inch Q210 mm 2200 W=8.3 inc	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 23.6" (600 mm) 40.3" (1025 mm) 27.6" (700 mm)	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 236" (600 mm) 40.3" (1025 mm) 27.6" (700 mm)	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu Cast Iron 2 Yes Yes 3.6" (600 mm) 35.4" (900 mm) 23.6" (660 mm) 40.3" (1025 mm) 27.6" (700 mm)
OOKTOP one Configuration ront Left ear Left ront Right ear Right ear Right ear Support Type an Support Ouantity as Safety Device for Hob as Safety Device for Oven IMENSIONS / WEIGHT verall Dim - Width (unpacked) verall Dim - Depth (unpacked) verall Dim - Depth (unpacked) verall Dim - Height (packed) verall Dim - Depth (unpacked) verall Dim - Depth (packed) verall Dim - Depth (packed)	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.78/2 inch (double zone) 0140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch 0210 mm 2200 W=8.3 inch 0210 mm 2200 W=8.3 inch 23.6" (600 mm) 23.6" (600 mm) 23.6" (600 mm) 23.6" (600 mm) 27.6" (700 mm) 130lb / 59kg	Ceramic Halogen 4 zones G120/210 mim 1800 W= 4,78.2 inch (double zone) G140 mm 1200 W=5.5 inch G160 mm 1500 W=6.3 inch G210 mm 2200 W=8.3 inch G210 mm 2354" (G00 mm) G210 mm 236" (G00 mm) G210 mm 27.6" (G00 mm) G210 mm 27.6" (G00 mm) G210 mm 27.6" (G00 mm)	Ceramic Halogen 4 zones 0180 mm 1800 W=7 inch 0140 mm 1200 W=5.5 inch 0140 mm 1200 W=5.5 inch 0210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 23.6" (660 mm) 40.3" (1025 mm) 27.6" (700 mm) 125.6lb / 57kg	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 236" (600 mm) 40.3" (1025 mm) 27.6" (700 mm) 146lb / 66kg	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu Cast Iron 2 Yes Yes 23.6" (600 mm) 25.6" (600 mm) 26" (660 mm) 40.3" (1025 mm) 27.6" (700 mm) 134.5lb / 61kg
OOKTOP one Configuration ront Left ear Left ront Right ear Ri	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch 0210 mm 2200 W=8.3 inch 0210 mm 2200 W=8.3 inch 0210 mm 2200 mm 23.6" (600 mm) 23.6" (600 mm) 24.6" (600 mm) 40.3" (1025 mm) 27.6" (700 mm) 130lb / 59kg 143lb / 65kg	Ceramic Halogen 4 zones 91:20/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm 2200 mm 2200 W=8.3 inch Q210 mm 2200 W=8.3 inc	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 23.6" (600 mm) 40.3" (1025 mm) 27.6" (700 mm)	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 236" (600 mm) 40.3" (1025 mm) 27.6" (700 mm)	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu Cast Iron 2 Yes Yes 3.6" (600 mm) 35.4" (900 mm) 23.6" (660 mm) 40.3" (1025 mm) 27.6" (700 mm)
one Configuration ront Left ear Left ront Right ear Right an Support Type an Support Quantity as Safety Device for Hob ass Safety Device for Hob ass Safety Device for Oven IlMENSIONS / WLEGHT iverall Dim - Height (unpacked) verall Dim - Height (unpacked) verall Dim - Height (packed) verall Dim - Height (packed) verall Dim - Depth (packed) verall Dim - Height (packed) verall Dim - Height (packed) verall Dim - Height (packed) verall Dim - Width (b/kg) OWER / RATINGS (203/240 V,	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch 0210 mm 2200 W=8.3 inch 0210 mm 2200 W=8.3 inch 23.6" (600 mm) 23.6" (600 mm) 23.6" (600 mm) 20.6" (600 mm) 27.6" (700 mm) 130lb / 59kg 143lb / 65kg	Ceramic Halogen 4 zones G120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm 256" (660 mm) Q25" (660 mm) Q26" (660 mm) Q27.6" (700 mm) Q27.6" (700 mm) Q27.6" (700 mm) Q28 (163lb / 74kg	Ceramic Halogen 4 zones 0180 mm 1800 W=7 inch 0140 mm 1200 W=5.5 inch 0140 mm 1200 W=5.5 inch 0210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 23.6" (600 mm) 40.3" (1025 mm) 27.6" (700 mm) 125.6lb / 57kg 139lb / 63kg	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 28" (600 mm) 26" (660 mm) 40.3" (1025 mm) 27.6" (700 mm) 146lb / 66kg 159lb / 72kg	4 Gas Zone 2.9kW=10000btu 2kW=7000btu 1kW=3500btu 2kW= 7000btu Cast Iron 2 Yes Yes 23.6" (600 mm) 35.4" (900 mm) 26" (660 mm) 40.3" (1025 mm) 27.6" (700 mm) 134.5lb / 61kg 148lb / 67kg
one Configuration ront Left ear Left ront Right ear Right an Support Type an Support Quantity as Safety Device for Hob as Safety Device for Hob as Safety Device for Oven IMENSIONS / WEIGHT verall Dim - Width (unpacked) verall Dim - Depth (unpacked) verall Dim - Height (unpacked) verall Dim - Height (packed) verall Dim - Septh (packed)	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm	Ceramic Halogen 4 zones 91/20/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm 256" (600 mm) Q3.6" (600 mm) Q3.6" (600 mm) Q40.8" (1025 mm) Q27.6" (700 mm) Q150 b / 68kg Q163 b / 74kg	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 23.6" (600 mm) 40.3" (1025 mm) 27.6" (700 mm) 125.6lb / 57kg 139lb / 63kg	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 236" (600 mm) 40.3" (1025 mm) 27.6" (700 mm) 146lb / 66kg 159lb / 72kg	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu Cast Iron 2 Yes Yes 23.6" (600 mm) 35.4" (900 mm) 26" (660 mm) 40.3" (1025 mm) 27.6" (700 mm) 134.5lb / 61kg 148lb / 67kg
OOKTOP one Configuration rort Left ear Left rort Left ear Left rort Right ear Right ear Right ear Support Type an Support Ouantity as Safety Device for Hob as Safety Device for Oven IMENSIONS / WEIGHT verall Dim - Width (unpacked) verall Dim - Height (unpacked) verall Dim - Height (packed) verall Dim - Height (packed) verall Dim - Depth (packed) et Weight (lb /kg) rut Shipping Weight (lb /kg) OWER / RATINGS (203/240 V, W/Amps Rating at 240V, 60Hz upply Cord & Plug	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) 0140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch 0210 mm 2200 W=8.3 inch 0210 mm 2200 W=8.3 inch 23.6" (600 mm) 23.6" (600 mm) 23.6" (600 mm) 20.6" (600 mm) 27.6" (700 mm) 130lb / 59kg 143lb / 65kg	Ceramic Halogen 4 zones G120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm 256" (660 mm) Q25" (660 mm) Q26" (660 mm) Q27.6" (700 mm) Q27.6" (700 mm) Q27.6" (700 mm) Q28 (163lb / 74kg	Ceramic Halogen 4 zones 0180 mm 1800 W=7 inch 0140 mm 1200 W=5.5 inch 0140 mm 1200 W=5.5 inch 0210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 23.6" (600 mm) 40.3" (1025 mm) 27.6" (700 mm) 125.6lb / 57kg 139lb / 63kg	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 28" (600 mm) 26" (660 mm) 40.3" (1025 mm) 27.6" (700 mm) 146lb / 66kg 159lb / 72kg	4 Gas Zone 2.9kW=10000btu 2kW=7000btu 1kW=3500btu 2kW-7000btu Cast Iron 2 Yes Yes 35.4" (900 mm) 23.6" (600 mm) 26" (660 mm) 40.3" (1025 mm) 27.6" (700 mm) 134.5lb / 61kg 148lb / 67kg
OOKTOP one Configuration ront Left ear Left ront Right ear Right an Support Type an Support Quantity as Safety Device for Hob as Safety Device for Oven IMENSIONS / WEIGHT verall Dim - Width (unpacked) verall Dim - Depth (upacked) verall Dim - Depth (packed) verall Dim - Beight (packed) verall Dim - Width (packed) verall Dim Septh (packed)	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm	Ceramic Halogen 4 zones 91/20/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm 256" (600 mm) Q3.6" (600 mm) Q3.6" (600 mm) Q40.8" (1025 mm) Q27.6" (700 mm) Q150 b / 68kg Q163 b / 74kg	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 23.6" (600 mm) 40.3" (1025 mm) 27.6" (700 mm) 125.6lb / 57kg 139lb / 63kg	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 236" (600 mm) 40.3" (1025 mm) 27.6" (700 mm) 146lb / 66kg 159lb / 72kg	4 Gas Zone 2.9kW=10000btu 2kW= 7000btu 1kW=3500btu 2kW= 7000btu Cast Iron 2 Yes Yes 23.6" (600 mm) 35.4" (900 mm) 26" (660 mm) 40.3" (1025 mm) 27.6" (700 mm) 134.5lb / 61kg 148lb / 67kg
OOKTOP one Configuration ront Left ear Left ear Left rort Right ear Right an Support Type an Support Type an Support Ouantity as Safety Device for Hob as Safety Device for Oven IMENSIONS / WEIGHT verall Dim - Width (unpacked) verall Dim - Height (unpacked) verall Dim - Height (unpacked) verall Dim - Height (packed) verall Dim - Depth (packed) verall Dim - Depth (packed) verall Dim - Depth (packed) verall Dim - Width (packed) verall Dim - Beight (backed) verall Dim - Visit (backed) verall Dim - Beight (backed) verall Dim - Status verall Dim - Status verall Dim - Status verall Dim - Beight (backed) verall Dim - Beight (backed) verall Dim - Beight (backed) verall Dim - Status verall Dim - Beight (backed) verall Dim - Beight (bac	Ceramic Halogen 4 zones 0120/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm	Ceramic Halogen 4 zones 91/20/210 mm 1800 W= 4.7/8.2 inch (double zone) Q140 mm 1200 W=5.5 inch Q160 mm 1500 W=6.3 inch Q210 mm 2200 W=8.3 inch Q210 mm 256" (600 mm) Q3.6" (600 mm) Q3.6" (600 mm) Q40.8" (1025 mm) Q27.6" (700 mm) Q150 b / 68kg Q163 b / 74kg	Ceramic Halogen 4 zones Q180 mm 1800 W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 23.6" (600 mm) 40.3" (1025 mm) 27.6" (700 mm) 125.6lb / 57kg 139lb / 63kg	Ceramic Halogen 4 zones Q180 mm 1800W=7 inch Q140 mm 1200 W=5.5 inch Q140 mm 1200 W=5.5 inch Q210 mm 2200 W=8.3 inch 23.6" (600 mm) 35.4" (900 mm) 236" (600 mm) 40.3" (1025 mm) 27.6" (700 mm) 146lb / 66kg 159lb / 72kg	4 Gas Zone 2.9kW=10000btu 2kW=7000btu 1kW=3500btu 2kW-7000btu Cast Iron 2 Yes Yes 35.4" (900 mm) 23.6" (600 mm) 26" (660 mm) 40.3" (1025 mm) 27.6" (700 mm) 134.5lb / 61kg 148lb / 67kg

38