## accucold

# AGP34RFLCALADA



#### 32.75" x 19" x 19.75" (H x W x D)

General purpose ADA height 2-door refrigerator-freezer with digital refrigerator control, internal fan, combination lock, and NIST calibrated alarm/thermometer

#### **Highlights:**

Combination refrigerator-freezer for general purpose storage in facilities

Digital controls allow you easily manage the refrigerator temperature between 2 and  $8^{\circ}C$ 

NIST calibrated thermometer included to help monitor the interior temperature

#### **Product Features:**


| Refrigerator-freezer combination   | 2 to 8°C refrigerator section for basic storage applications, with an upper freezer compartment ideal for ice packs  |  |
|--|--|--|
| Combination lock   | Factory-installed front lock secures both compartments with a user-set code. Two keys are included to override the combination as needed   |  |
| Digital thermostat (refrigerator)  | Easy operation with a factory-installed digital thermostat that allows you to manage the refrigerator temperature between 2 and 8°F (NOTE: the freezer temperature will self-adjust based on the refrigerator setting) |  |
| Alarm/thermometer included   | Temperature monitoring device (TMD) displays the current and min/max temperature of the refrigerator interior, with an audible alarm to alert if the unit goes out of range  |  |
| Buffered temperature probe   | Thermometer probe is encased in a glycol-filled bottle to better simulate the temperature of stored contents instead of refrigerator air temperature   |  |
| NIST calibrated external temperature rea   | doutThermometer is NIST calibrated in our ISO/IEC 17025:2017 certified laboratory and ships with a 2-year certificate of calibration for your records  |  |
| Fan-forced cooling   | Refrigerator section includes a factory-installed fan to help ensure a more evenly cooled interior   |  |
| Automatic defrost refrigerator   | Lower refrigerated section does not require manual defrosting  |  |
| SUMMIT APPLIANCE DIVISION, FELIX STOP<br>Magualde Avastiér Bozeny 10474 USA TEL 71 | RCH, INC.   ISO 9001:2015 Certified<br>I8-89 Static rading-systems in the up fracter comparisments www.summitappliance.com   |  |


## accucold

### AGP34RFLCALADA Specifications:

| Door W<br>Cabinet W<br>US Electrical Safety ET<br>Canadian Electrical Safety ET<br>Amps   | cm)<br>cm)<br>cm)<br>cm)                          |  |  |
|---|---|--|--|
| Width19.0" (48Depth19.75" (50Depth with door at 90°36.75" (93Capacity3.2 cu.ft.Defrost TypeCDoorWCabinetWUS Electrical SafetyETAmpsC  | cm)<br>cm)<br>(91<br>L)<br>ycle<br>/hite          |  |  |
| Depth19.75" (50Depth with door at 90°36.75" (93Capacity3.2 cu.ft.Defrost TypeCDoorWCabinetWUS Electrical SafetyETAmpsC  | cm)<br>cm)<br>(91<br>L)<br>ycle<br>/hite          |  |  |
| Depth with door at 90°36.75" (93Capacity3.2 cu.ft.Defrost TypeCDoorWCabinetWUS Electrical SafetyETAmps  | cm)<br>(91<br>L)<br>ycle<br>/hite                 |  |  |
| Capacity3.2 cu.ft.Defrost TypeCDoorWCabinetWUS Electrical SafetyETCanadian Electrical SafetyETAmpsC   | (91<br>L)<br>ycle<br>/hite<br>/hite               |  |  |
| Defrost Type C<br>Door W<br>Cabinet W<br>US Electrical Safety ET<br>Amps  | L)<br>ycle<br>/hite<br>/hite                      |  |  |
| DoorWCabinetWUS Electrical SafetyETCanadian Electrical SafetyETAmpsET   | /hite<br>/hite                                    |  |  |
| Cabinet W<br>US Electrical Safety ET<br>Canadian Electrical Safety ET<br>Amps   | /hite   |  |  |
| US Electrical Safety<br>Canadian Electrical Safety ET<br>Amps   |   |  |  |
| Canadian Electrical Safety ET<br>Amps   | ETI   |  |  |
| Amps  |   |  |  |
| •   | L-C   |  |  |
|   | 1.1   |  |  |
| Voltage/Frequency 115 V AC  | C/60<br>Hz  |  |  |
| Weight 55.0 lbs.  | (25<br>kg)  |  |  |
| Shipping Weight 77.0 lbs.   | (35<br>kg)  |  |  |
| Parts & Labor Warranty 1  | Year  |  |  |
| Compressor Warranty 5 Ye  | ears  |  |  |
| UPC 761101086   | 033   |  |  |
| Refrigerator-Freezer  |   |  |  |
| Door Swing F  | RHD   |  |  |
| Reversible  | Yes   |  |  |
| Adjustable Shelves  | Yes   |  |  |
| Interior Light  | Yes   |  |  |
|   |   |  |  |
| Refrigerator - Interior Height 18.5" (47  | cm)   |  |  |
| Refrigerator - Interior Height18.5" (47Refrigerator - Interior Width15.75" (40  | ,   |  |  |
|   | cm)   |  |  |
| Refrigerator - Interior Width15.75" (40Refrigerator - Interior Depth15.0" (38   | cm)   |  |  |
| Refrigerator - Interior Width15.75" (40Refrigerator - Interior Depth15.0" (38   | cm)<br>cm)  |  |  |
| Refrigerator - Interior Width15.75" (40Refrigerator - Interior Depth15.0" (38Refrigerator - Shelf TypeV   | cm)<br>cm)<br>Vire                                |  |  |
| Refrigerator - Interior Width15.75" (40Refrigerator - Interior Depth15.0" (38Refrigerator - Shelf TypeVRefrigerator - Shelf QtyRefrigerator - Shelf QtyRefrigerator - Full DoorV  | cm)<br>cm)<br>Vire<br>2<br>2                      |  |  |
| Refrigerator - Interior Width 15.75" (40   Refrigerator - Interior Depth 15.0" (38   Refrigerator - Shelf Type W   Refrigerator - Shelf Qty Refrigerator - Shelf Qty   Refrigerator - Full Door Shelves   Refrigerator - Temperature 2 to   | cm)<br>cm)<br>Vire<br>2<br>2<br>8°C               |  |  |
| Refrigerator - Interior Width15.75" (40Refrigerator - Interior Depth15.0" (38Refrigerator - Shelf TypeVRefrigerator - Shelf QtyRefrigerator - Shelf QtyRefrigerator - Full Door<br>Shelves2 to<br>Range   | cm)<br>cm)<br>Vire<br>2<br>2<br>8°C<br>cm)        |  |  |
| Refrigerator - Interior Width15.75" (40Refrigerator - Interior Depth15.0" (38Refrigerator - Shelf TypeWRefrigerator - Shelf QtyRefrigerator - Shelf QtyRefrigerator - Full Door<br>ShelvesRefrigerator - Temperature<br>RangeRefrigerator - Temperature<br>Range2 toFreezer - Interior Height7.5" (19 | cm)<br>cm)<br>Vire<br>2<br>2<br>8°C<br>cm)<br>cm) |  |  |

| Thermostat Type        | Digital        |
|------------------------|----------------|
| Fan Type               | Interior       |
| Refrigerant Type       | R600a          |
| Refrigerant Amount     | 1.16 oz.       |
| High Side PSI          | 250.0          |
| Low Side PSI           | 88.0           |
| Level Legs             | 2              |
| Compressor Step Height | 9.0" (23 cm)   |
| Compressor Step Width  | 15.75" (40 cm) |
| Compressor Step Depth  | 5.0" (13 cm)   |

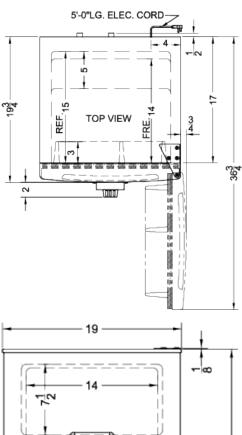



ELEC. CORD

