accuc@ld

ARG15PV



72" x 23.38" x 24.38" (H x W x D)

Performance series Pharma-Vac 15 cu.ft. upright glass door commercial all-refrigerator for the display and refrigeration of vaccines

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Additional sensor reads interior air temperature for superior temperature control

Product Features:


Purpose-built design	Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC guidelines
+/-1°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period
Commercial design	Meets UL-471 commercial standards
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +8°C
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup
Access port	Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment
Open door alarm	Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes)



accuc@ld

ARG15PV Specifications:

Height of Cabinet Width Width with Door Open		
	72.0" (183 cm)	
Width with Door Open	23.38" (59 cm)	
Width With Door Open	23.88" (61 cm)	
Depth	24.38" (62 cm)	
Depth with Handle	26.13" (66 cm)	
Depth with door at 90°	46.5" (118 cm)	
Capacity	15.0 cu.ft. (425 L)	
Defrost Type	Automatic	
Door	Glass	
Cabinet	White	
US Electrical Safety	ETL	
Canadian Electrical Safety	ETL-C	
Amps	1.4	
Voltage/Frequency	115 V AC/60 Hz	
Weight	204.2 lbs. (93 kg)	
Shipping Weight	224.9 lbs. (102 kg)	
Estimated Time to Ship	1 to 2 days	
Parts & Labor Warranty	2 Years	
Compressor Warranty	5 Years	
Refrigerator Features		
Door Swing	RHD	
Reversible	Yes	
Shelf Type	Wire	
	7	
Shelf Qty		
Shelf Qty Adjustable Shelves	Yes	
<u> </u>	Yes Digital	
Adjustable Shelves		
Adjustable Shelves Thermostat Type	Digital	
Adjustable Shelves Thermostat Type Fan Type	Digital Interior	
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type	Digital Interior R600a	
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount	Digital Interior R600a 2.65oz.	
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light	Digital Interior R600a 2.65oz. Yes	
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range	Digital Interior R600a 2.65oz. Yes	
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range Dimensions	Digital Interior R600a 2.65oz. Yes 2 to 8°C	
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range Dimensions Interior Height	Digital Interior R600a 2.65oz. Yes 2 to 8°C	
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range Dimensions Interior Height Interior Width	Digital Interior R600a 2.65oz. Yes 2 to 8°C 63.25" (161 cm) 20.0" (51 cm)	
	Wire	

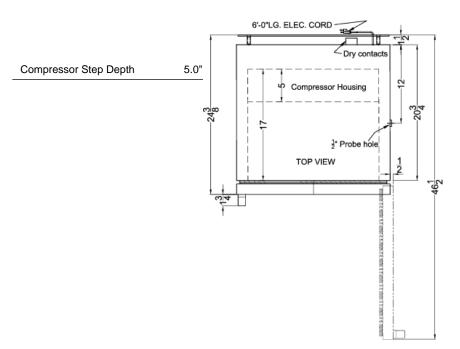

accuc@ld

