

CBS 2062 Premium Plus BioFresh

36" NoFrost Freestanding or semi Built-in Refrigerator & Freezer

Open the stylish stainless steel French doors on the freestanding **CBS 2062** to reveal large capacity storage options and the most ideal conditions for food preservation. Two BioFresh drawers on telescopic rails create an environment that actually allows vitamins and minerals in produce to continue to grow and as a result, contribute to a healthier lifestyle. Outstanding LED light columns and well-placed LED lights illuminate both BioFresh and the double freezer drawers.

The duo cooling system with separate variable speed compressors for the refrigerator and the freezer provide superior performance and maximum energy efficiency.



LED light
Column



Digital Display



BioFresh Drawers

Energy Star Most Efficient 2015

Capacity	534 liters / 18.8 cu. ft.
Refrigerator Compartment	295 liters / 10.4 cu. ft.
Biofresh Drawers	69 liters / 2.4 cu. ft.
Freezer Compartment	170 liters / 6.0 cu. ft.
Energy Star	Yes
Energy consumption per year	528 KWH/Y
Estimated yearly Energy Cost	\$63 USD *
Climate rating	SN-T 10°C to 43°C(50°F to 110°F)
Power	115v at 60hz 2.5 amps/300 watt
Shipping Weight	177 kg / 390 lbs.
Refrigerator Compartment	
Interior light	LED Side and Top
Biofresh Drawers	Two with LED light
Forced air fan system	Quiet DC fan
Bottle shelf	Integrated and Variable
Gallon storage door shelf	2
Adjustable Glass Door shelves	4
Glass Shelves Adjustable	3
Freezer compartment	
Interior light	LED
Icemaker	Connected to water supply
Ice cube production in 24 hr.	1.3 kg / 3 lbs.
Ice cube storage capacity	2.7 kg / 6 lbs.
*Your Energy Costs will depend on your utility rates and use. Estimated energy cost based on a national average electricity cost of 12 cents per KWh.	

THIS IS A QUICK REFERENCE GUIDE FOR **CBS 2062**, FOR COMPLETE INSTRUCTIONS, PLEASE REFER TO THE DESIGN GUIDE OR VISIT <http://www.liebherr-appliances.com>

Cabinet Opening Dimensions 36" Models

The appliance can be used as freestanding or semi built-in.


At semi built in please consider the cabinet opening dimensions.

The requirements for water supply and electrical outlet are the same for both applications.

IMPORTANT

Do not install the shut-off valve behind the appliance.

The position of the electrical outlet can be within the grey shaded areas or above the appliance.

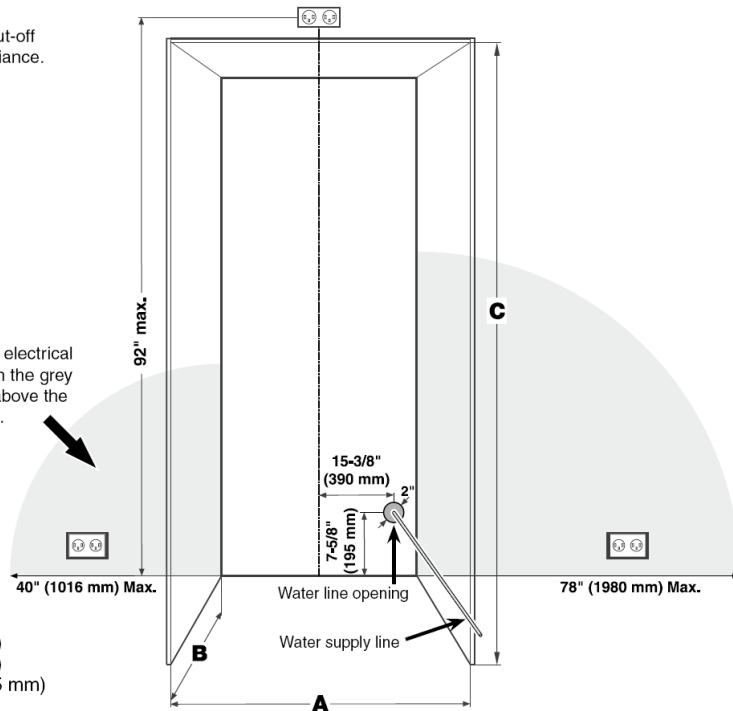

- A. 36" (914 mm)
- B. 24" (610 mm)
- C. 80-1/2" (2045 mm)

IMPORTANT


At 24" cabinets, the water line opening must be in the location as shown.

At cabinets deeper than 24" there is room to fit the pipe behind the appliance and the wall so there are no requirements for the water line lead out position.

IMPORTANT

The free length of the water supply line must be at least 31 - 1/2" (800 mm) when the tube comes out of the prescribed opening.

Unit Dimensions

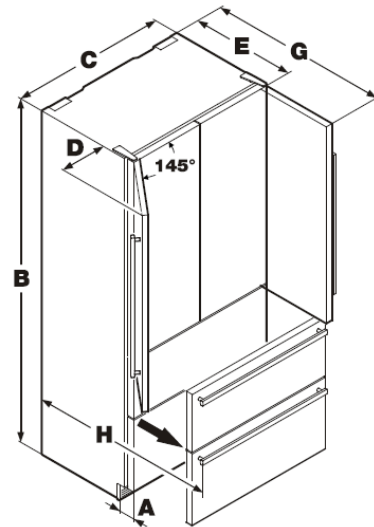

Overall height can be increased on CS 20 units by 1-1/2" (40 mm).



CS 2062, CBS 2062

- A = 3-17/32" (90 mm)
- B = 80-9/32" (2039 mm) [includes door hinge]
- C = 35-13/16" (910 mm)
- D = 13-9/16" (344 mm)
- E = 24-7/32" (615 mm)
- G = 40-13/16" (1037 mm)
- H = 39-7/16" (1002 mm)

Please allow for door swing clearance at locations next to a wall.

[2-3inch filler for handle clearance]


Top Door Hinge Clearance CS 2062, CBS 2062

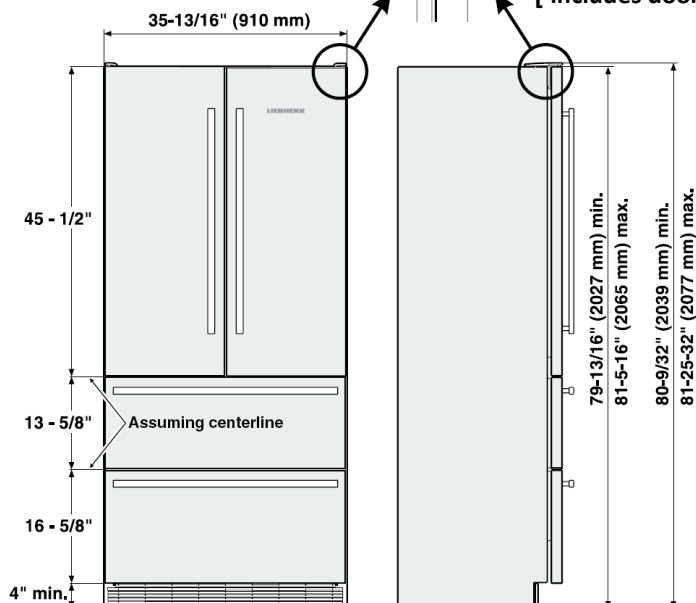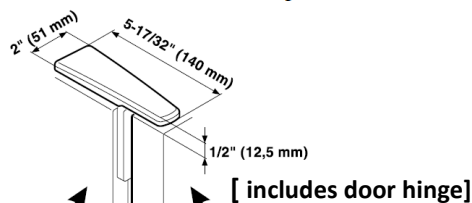

When installing CS 20 units into a row of cabinets or wall units; use these dimensions to achieve a custom look with the cabinetry while providing the necessary clearance for the top door hinge.

Ventilation Requirements 36" Models

CS/CBS 20 appliances dont need any ventilation openings in the cabinet. The required airflow is directed through the toe kick area

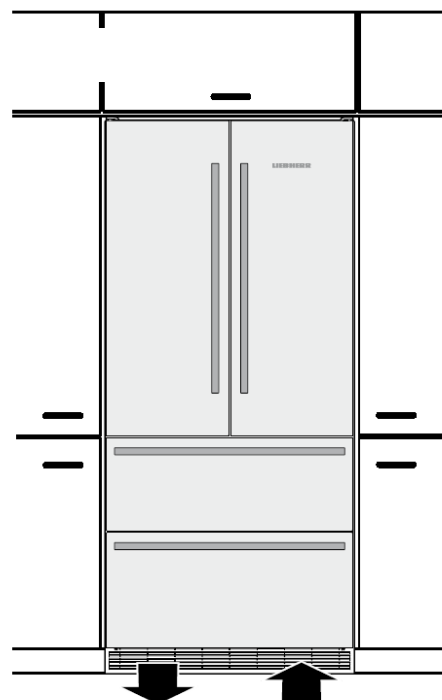

It is important to use the provided cover grille for the ventilation opening. This opening must not be covered with a cabinet base.