CT9070SH

GE Cafe[™] Series 30 in. Built-In French-Door Single Convection Wall Oven

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT.

NOTE: These ovens are not approved for stackable installations. Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Door handle protrudes 2-1/2" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

INSTALLATION INFORMATION:


Before installing, consult installation instructions packed with product for current dimensional data.

KW RATING	
240V	4.5
208V	3.4
BREA	KER SIZE
BREAF 240V	XER SIZE

В→	Cutout width 28-1/2" MIN. 28-5/8" MAX.	Cutout height 27-1/4" MIN. 27-5/16" MAX. Recommended cutout location from floor 16-1/4" MIN. 32-1/2" MAX.
	← 30" →	

	_
	Cutout depth 23-1/2" MIN
E Conduit 40"	Junction box location 22" to bottom of junction box

	СТ9ОТО
Cabinet	30"
A – Overlap of oven at top of cutout	1-1/4"
B – Overlap of oven over side of edges of cutout	3/4"
C – Overlap of oven at bottom of cutout	1-1/4"
Oven	
D – Install depth	23-1/2"
E – Overall height with trim	28-5/8"
F – Overall width	29-3/4"



2 x 4 or equivalent runners level with bottom of cutout and flush with sides of cutout or solid bottom floor.







Listed by Underwriter Laboratories





CT9070SH

GE Cafe[™] Series 30 in. Built-In French-Door Single Convection Wall Oven

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

NOTE: This model is not approved for installation below a countertop or in combination with a separate cooktop. The minimum installation height from the floor is 16-1/4".

NOTE: A minimum gap of 14" from either side of the wall oven


to an adjacent 45 or 90 cabinet, drawer or was is required to avoid interference with the opening of the doors. The handles protrude 2-1/2" from the door face.

NOTE: Countertops may need to be notched on either side of the wall oven to avoid interference with the opening of the doors.

Installation information: Before installing, consult installation instructions packed with products for current dimensional data and for alternate installation options.


THIS MODEL IS NOT APPROVED FOR FLUSH-MOUNT INSTALLATION

INSTALLATION TO ADJACENT COUNTERTOP AND CABINET DOORS

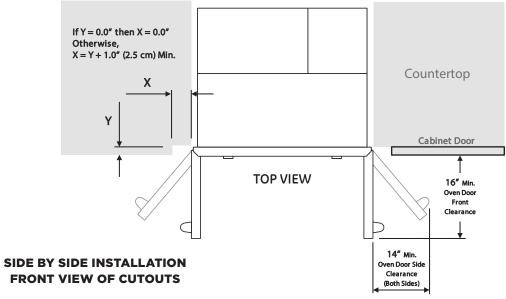

If both ovens are French Door models, then 30" min.

If the second oven is a drop down door model, then 14" min.





CT9070SH

GE Cafe[™] Series 30 in. Built-In French-Door Single Convection Wall Oven

FEATURES AND BENEFITS

French door design – Inspired by commercial kitchen designs, precision engineering allows for one-handed opening of both oven doors at the same time

True European Convection with Direct Air – Bakes evenly as warm air blows from the top in and around bakeware

Electronic dial controls – The glass touch display and ergonomic control knobs are easy to operate and clean

WiFi Connect – Wirelessly control oven functions from your smartphone

Progressive halogen oven lighting – See what you're baking with lights that slowly illuminate the oven

Self-clean with Steam Clean option – Clean your oven the way you want

Self-clean heavy-duty roller rack – Easily access items with a rack that glides smoothly

Ten-pass dual broil element – Large and small dishes brown evenly with two, full-coverage elements

Ten-pass bake element – Even baking is assured with heat that covers more surface area

5.0 cu. ft. oven capacity - Cook more dishes at once

Model CT9070SHSS - Stainless Steel

GUARANTEED FIT

Replacing a similar wall oven from GE or another brand? GE wall ovens are guaranteed for an exact fit to make replacement easy

Visit geappliances.com for more info

