

THE EXPERTS
IN ROOM AIR CONDITIONING



FRIEDRICH
1883

AjMadison

COMMERCIAL GRADE Your Appliance Authority™

AND

RESIDENTIAL GRADE
MODELS

800-570-3355



WINDOW AIR CONDITIONER SELECTOR GUIDE

		COMMERCIAL GRADE		RESIDENTIAL GRADE	
		Kühl®	Kühl®+	Chill™	Chill™+
OVERVIEW	Description	Bold design and exclusive features. Programmability to rival central systems. Trusted Friedrich durability. Designer colors.	All the performance and durability of Kühl, plus heating. Choose efficient heat pump or toasty electric heat.	Good value. Available in a large range of cooling capacities. 24-hr. timer.	Good value. Four models with electric heat. 24-hr. timer.
	Room size (sq. ft.)	100-2700	350-2700	100-1500	100-1500
	Functions	COOL ❄️	HEAT/COOL ❄️🔥	COOL ❄️	HEAT/COOL ❄️🔥
	Applications	COMMERCIAL AND RESIDENTIAL	COMMERCIAL AND RESIDENTIAL	RESIDENTIAL AND LIGHT COMMERCIAL	RESIDENTIAL AND LIGHT COMMERCIAL
COMFORT & CONVENIENCE	Electronic controls	Y	Y	Y	Y
	Timer	7-day with up to 4 settings per day*; 24 hr. timer	7-day with up to 4 settings per day*; 24-hr. timer	24 hr.	24-hr.
	Remote control	LCD	LCD	LCD	LCD
	Control with smart phone or computer with FriedrichLink™ (accessory required)	Y	Y	—	—
	Auto-restart w/setting retention	Y	Y	Y	Y
	Auto temp/ fan speed adjustment	Y	Y	—	—
	Auto-changeover	—	All except EQ08	—	—
	Air flow directions	8	8	4	4
	Auto swing louvers	—	—	All except CP05	Y
Optional color fronts	Y	Y	—	—	
SOUND REDUCTION TECHNOLOGY	Steel inner wall and extra dense insulation	Y	Y	—	—
	Vibration isolating design and components	Y	Y	—	—
	Superior airflow design	Y	Y	—	—
EARTH FRIENDLY	ENERGY STAR® models	Y	Y	Y	Y
	Smart Grid capable	Y	Y	—	—
	Environmentally friendly R-410A	Y	Y	Y	Y
	Energy saver switch	Y	Y	Y	Y
	RoHS compliant	Y	Y	—	—
HEALTH	Washable, antimicrobial air filter	Y	Y	Y	Y
	Optional carbon filter	Y	Y	—	—
	Check filter reminder	Y	Y	—	—
	Superior fresh air intake/stale air exhaust	All except SQ & EQ models	All except EQ08	Stale air exhaust only, all except CP05	Stale air exhaust only
SAFETY	EntryGard™ anti-intrusion protection	Y	Y	Y	Y
	Insect barrier	Y	Y	—	—
INSTALLATION	Slideout chassis	Y	Y	All except CP05	Y
	Power cord direction	Left or right	Left or right	Left or right	Left or right
	Thru-the-wall installation option	Y	Y	All except CP05	Y
	Window installation hardware	Heavy duty	Heavy duty, available as accessory	Standard	Standard

*Requires internet connection and FriedrichLink™ accessory.

Product Selection Tools

These tools are only a guide. Due to variations in room design, local climate and occupancy, larger areas may require the use of multiple units to provide the optimal cooling solution. Please consult your local authorized Friedrich distributor or the Friedrich Technical Assistance team for sizing or application assistance.

COOLING SIZING GUIDE

The cooling guide to the right is based on normal room insulation, average number of sun-exposed windows and two-person occupancy.

HEATING SIZING INFORMATION

In heating mode, an energy efficient heat pump will generate slightly less heating Btus than it would in cooling mode. However, in heating mode, heat pumps use approximately 1/3 the energy of resistance heat, making them an excellent high-efficiency alternative. Back-up resistance heat ensures heat operation below 40° F outdoor temperatures for year 'round comfort.


Common Window Types

Traditional wooden windows are typical in many residences built before 1965, but more modern windows are often constructed of aluminum or vinyl. Many newer energy efficient windows like double-glazed windows actually sandwich low conductance gas between two panes of glass. While Friedrich air conditioners may be used with this type of window, care should be taken not to break the seal between the two panes of glass during installation.


Depending on the style of window in the application, you may want to consider the cooling solutions in the adjacent chart. Professional installers may be able to make field adaptations, including removing all or part of a window to support alternative types of air conditioning units. Professional installers should also be able to tell you about any local codes that may apply to your installation.

THRU-THE-WALL INSTALLATION


Many models may be installed through a wall so long as the unit's side vents are not blocked or covered in any way. See page 15, In-wall Installation max. depth.

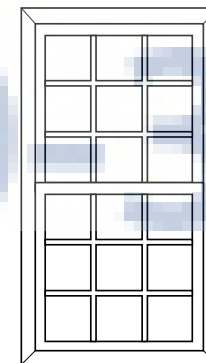


Single/double hung
(Opens up or down)




Slider
(Opens left to right, or right to left)



Awning
(Cranks out)



Hopper
(Opens in)



Casement
(Cranks out)

COOLING SIZING GUIDE

Area to be conditioned in sq. ft.	Cooling Btu
100 - 150	5000
150 - 250	6000
250 - 300	7000
300 - 350	8000
350 - 400	9000
400 - 450	10000
450 - 550	12000
550 - 700	14000
700 - 1000	18000
1000 - 1200	21000
1200 - 1400	23000
1400 - 1600	25000
1600 - 1900	28000
1900 - 2700	36000

WHICH AIR CONDITIONER IS RIGHT FOR YOU?

Window Type	Air Conditioner
Single/double hung	Window, portable, ductless
Slider	Window*, portable, ductless
Casement	Portable, ductless
Vertical Casement	Portable, ductless
Awning	Portable, ductless
Hopper	Portable, ductless
Picture (non-opening)	Thru-the-wall, ductless

*May require additional modifications

KÜHL® IS COMMERCIAL GRADE

IT'S TOUGH, DURABLE,
POWERFUL AND NOW IT'S
WIRELESS.

Kühl Construction.

For over 125 years, Friedrich products have been renowned for their commercial-grade, built-to-last design.

Advanced engineering, high-end materials and components, and rigorous product testing are just a few examples of Friedrich's commitment to quality. When designing Kühl, our engineers challenged convention to develop the very best window air conditioner on the market. Kühl incorporates high-end materials like heavy-gauge galvanized steel, rifled copper tubing, and high-tech aluminum fins.

Kühl also uses the most durable components to extend the life of your air conditioner, including fully-enclosed fan motors that seal out dirt, and powerful, energy-efficient compressors, which make Kühl as tough an air conditioner as we've ever built.

Kühl Quiet.

Kühl has been engineered for quiet operation. Materials have been chosen because of their sound-absorption properties and every moving part has been braced and insulated. For example, extra thick rubber grommets absorb vibration and reduce noise inside, while steel inner walls and extra dense insulation block outdoor noise.

Rugged hardboard side panels help reduce noise and keep out light. The unique air path is more streamlined, drawing air through the sides, away from moving parts. And our larger discharge vents allow for smoother air flow, delivering maximum conditioned air quietly.

Kühl Comfort.

The most comfortable temperature is the one you never notice. Kühl uses multiple built-in environmental sensors to more accurately monitor indoor and outdoor temperatures so that it can maintain your ideal settings.

Kühl+ models have the ability to cool or heat as needed so units can operate year-round. And, like the most advanced central systems, Kühl+ automatically switches between air conditioning and heating functions to maintain the desired comfort level. You won't have to lift a finger.


Plus, Kühl's air flow systems are tested for powerful and precise air distribution which means faster cooling when you need it most.

Madison
Your Appliance Authority™
800-570-3355

KÜHL CONSTRUCTION



Kühl® Series



COMMERCIAL GRADE

MAINTENANCE



KÜHL®. TOUGH ENOUGH FOR THE MOST DEMANDING APPLICATIONS

Kühl is used in industrial applications where only the most rugged air conditioners can survive.

Friedrich conducts rigorous performance tests to ensure customer satisfaction and safety in our own UL-certified lab. Run tests are performed for up to 120 continuous days under extreme temperature conditions.

Air flow systems are tested for powerful and precise air distribution using state-of-the-art Computational Fluid Dynamics (CFD). Sound levels are measured and optimized in our Friedrich sound lab to ensure ultraquiet performance. Premium air filters are tested for adsorption capacities and efficiencies.

The unit's control software is tested for constant and reliable operation. Packaging exceeds ISTA (International Safe Transit Association) standards in order to withstand transportation hazards.

Advanced design technology. Extensive product testing. It's what you can expect from Friedrich.

THE NEXT BIG THING IN CONTROLLING ENERGY COSTS IS AVAILABLE RIGHT NOW.

Building energy management capabilities

New wireless capabilities open up a whole new dimension of building energy management. Kühl's new controls allow facilities management personnel to remotely control set points, schedules and operating modes.

And units can be controlled from remote computers and mobile devices using the only online interface ever developed for room air conditioners.



CASE STUDY: THE PRATT INSTITUTE

"NYSERDA estimates that we can save 25% on our energy consumption which is tremendous... Friedrich really is the industry standard in room air conditioning".

Pratt Institute is located on over 26 acres in Brooklyn and Manhattan and has almost 300 room air conditioners in operation across the campus. Until Friedrich introduced Kühl, facilities management had to depend on personnel to remember to turn units off and maintain appropriate operating conditions. However, Kühl's controls and scheduler now allow facilities operations to control all of their Friedrich units centrally using a hard card system and a daisy chain. NYSERDA estimates that Pratt can save 25% on energy consumption. And, Kühl comes in a variety of sizes which means Pratt has the flexibility to place a variety of units in different sized rooms.

Stephen Brennan
Director of Maintenance & Operations
Pratt Institute
Brooklyn, NY



KÜHL® YOUR WORLD

Whenever. Wherever.
Kühl is Wi-Fi enabled so you can control settings from a smartphone, tablet or computer.



WI-FI OPERATION (requires optional accessory sold separately)

Kühl units can be controlled remotely over a Wi-Fi network using FriedrichLink™ Wi-Fi Adapter Accessory.

A web-based control portal on Friedrich.com allows you to access units for monitoring or control.



Kühl is the first room air conditioner that can tie into a power company's smart grid.

A grid is a network that brings electricity from power stations to consumers. New technologies allow power companies to adjust electrical loads of residential users based on their specific needs - this is called a 'smart grid'. Smart grid helps consumers to be better informed about their electricity usage and allows electric utility companies to serve customer demand in the most efficient way.

For example, during a hot summer afternoon when AC units are running at full capacity, the smart grid can send information to recalibrate other loads, which helps to alleviate stress on the system as a whole.

Source: SGIC (Smart Grid Information Clearinghouse)

WINDOW AIR CONDITIONERS

Kühl® ULTRA PREMIUM LINE

Experience the control and convenience of a central air conditioning system in ways you never thought possible. Control Kühl units via FriedrichLink™.


You'll find more options, features and ways to customize each cooling experience than you ever thought possible in a window air conditioning solution.

NEW smaller size

FITS WINDOWS FROM 22" TO 42" WIDE



Neutral Gray
[STANDARD]



Kühl®
5400-9600 Btu
Up to 11.2 EER

Kühl+
Electric Heat
COOLING
7600 Btu
Up to 10.5 EER
ELECTRIC HEAT
4000 Btu

With Kühl you can choose from simple ON/OFF operation of a single unit to advanced programming and scheduling.

SIMPLE OPERATION

Turn the unit on, select 'MODE' and make simple up/down temperature adjustments either at the control panel or with included remote.

BUILT-IN 7 DAY SCHEDULES

Kühl units include two 7-day energy management schedules which can be accessed and selected from the unit's controls.

The 'Residential' schedule causes Kühl to raise the room temperature temporarily during the hours when most people are away at work and lower them again prior to the time when most people will return home.

The 'Commercial' schedule tells the unit to raise temperatures after typical working hours and on weekends when commercial spaces are typically unoccupied.

CUSTOM 7-DAY SCHEDULE (requires optional accessory sold separately)

Create up to 5 custom programs that you can use to operate your Kühl air conditioner for maximum comfort and efficiency. Each 7-day program allows up to 4 setting changes per day.

See <http://friedrichlink.friedrich.com> for more details.

Full LCD display shows MODE, FAN SPEED, SET TEMPERATURE and SCHEDULE. Adjust TEMPERATURE and FAN SPEEDS, set AUTO MODE and turn the SCHEDULE ON/OFF.

FITS WINDOWS FROM 27 3/8" TO 42" WIDE



Neutral Gray
[STANDARD]



Kühl®
7900-36000 Btu
Up to 11.2 EER

Kühl+
Electric Heat
COOLING
7600-36000 Btu
Up to 10.9 EER
ELECTRIC HEAT
4000-17300 Btu

Kühl+
Heat Pump
COOLING
9500-23500 Btu
Up to 10.5 EER
HEATING
8000-23500 Btu

KÜHL CONTROL

KÜHL® FEATURES

Comfort

- Convenient control from your smartphone or computer via FriedrichLink™ (required accessory sold separately)
- 24-hour timer
- Up to 4 cooling and 4 fan-only speeds on select models
- Automatic fan speed adjustment
- Auto-changeover from cool to heat; heat to cool to maintain set temperature (Kühl+ models except EQ08)
- 8-way air flow control
- Temperature readout can display set temperature and room temperature
- LCD panel auto dims if not in use
- LCD settings lockout option (ON/OFF)
- Premium remote control allows user to activate schedule, adjust temperature, adjust fan speed or select auto-fan; can also switch from cool to heat and heat to cool (Kühl+ models)

Maintenance & Installation

- Check filter reminder and error code storage
- Same sleeve dimensions for 30+ years for easy replacement
- Slideout chassis for more permanent installation and easier access for maintenance
- Installs in a window or in-wall
- Heavy-duty installation hardware lasts longer and provides a superior barrier from the outside elements (optional accessory on Kühl+ models)
- Rugged hardboard side panels or (heavy duty side curtains on SQ and EQ models) for a more permanent installation
- Power cord can run either left or right
- Firm grip handles for easier chassis installation and removal
- Front cover attaches easily and securely. Nut driver included**

Durability

- Sealed control panel for protection from dust, moisture and contaminants
- Control module is separate from touch controls for better protection from the elements, abusive handling or accidental damage and to minimize repair costs
- Robust 20 gauge steel cabinet
- Solid-sleeve top keeps out falling debris*
- Solid-steel blower housing offers enhanced protection
- Totally enclosed commercial grade fan motor runs at a lower temperature to prevent overheating and is double-mounted for added stability and reduced wear
- Durable base pans and steel inner walls
- Unit's structural integrity allows it to be removed, cleaned and maintained outside of its sleeve
- Aluminum end plates will not contribute to rust-stained building exteriors
- Scratch-resistant cabinet
- High-tech aluminum fins with rifled copper tubing are more efficient and less prone to corrosion
- Defrost control protects coil against freeze up

Sound Reduction Technology

- Steel inner wall and extra dense insulation materials block outdoor noise
- Vibration isolating design and components diminish traditional operating sound levels
- Precision engineering maximizes air flow while delivering ultra quiet operation

Energy Management & Compliance

- 2 ready-to-go 7-day energy management programs*
- Autofan mode saves money by conserving energy
- ENERGY STAR® qualified models, including heat pumps
- 24V low voltage interface
- Environmentally-friendly R-410A refrigerant used in all models
- Recyclable packaging
- RoHS compliant

Safety & Security

- EntryGuard™ anti-intrusion protection - secures chassis to the sleeve with a steel retaining wire to deter 'kick-in' intrusion
- Power cord current leakage protected
- Aluminum rear grille protects the outdoor coil from damaging debris and vandalism
- Insect barrier*

Health & IAQ

- Superior fresh air intake and stale air exhaust vent*
- Washable, antimicrobial air filter
- Optional premium carbon filter provides superior air filtration with ratings as high as MERV 6, while also adsorbing odors, and reducing ozone and VOCs when used in conjunction with standard filter
- Hinged door for easy filter access

KÜHL® ACCESSORIES

FRIEDRICHLINK™ ADAPTER

Wi-Fi Adapter Accessory connects to unit to allow for remote wireless access and programming from a computer, tablet or mobile device

Model	Kit No.
N Series	KWIFI



PREMIUM CARBON FILTERS

Remove odors and VOCs (volatile organic compounds). Achieve up to a MERV 6 rating when used with standard filter. Sold in packs of 3.



Model	Kit No.
SQ and EQ	KWCFCQ
SS, ES and YS	KWCFS
SM, EM and YM	KWCFM
SL, EL and YL	KWCFL

WINDOW MOUNTING KITS: KÜHL+


Heavy duty kits required for installation of these Kühl+ models in a window.

Heat/Cool Models	Kit No.
EQ08N11*	KWIKQ
ES12N33, ES16N33, YS10N10A and YS12N33.	KWIKS
EM18N34, EM24N34A and YM18N34.	KWIKM
EL36N35 and YL24N35.	KWIKL

*EQ08N11 window kit KWIKQ does not include window brackets.



KWIKQ

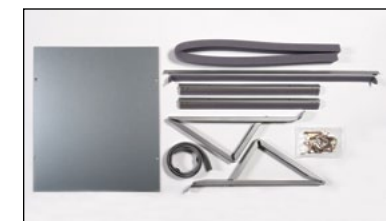

KWIKS, KWIKM, KWIKL

COLORED FRONT COVERS

Colored front cover kits available



Deep Red



Cobalt Blue



Classic Beige



Designer White



Black Onyx

Model	COLOR				
	Deep Red	Cobalt Blue	Classic Beige	Designer White	Black Onyx
	Kit No.				
SQ and EQ	KWREDQA	KWBLUQA	KWBGQA	KWWHTQA	KWBLKQA
SS, ES and YS	KWREDA	KWBLUSA	KWBGESA	KWWHTSA	KWBLKSA
SM, EM and YM	KWREDA	KWBLUMA	KWBGEMA	KWWHTMA	KWBLKMA
SL, EL and YL	KWREDA	KWBLULA	KWBGELA	KWWHTLA	KWBLKLA

DRAIN KIT

Drain tube field installed to the bottom on the base pan.

Model	Kit No.
All Kühl Series Models	DC2



* Feature not available on Kühl SQ and EQ models. **Nut driver not required for Kühl SQ and EQ models.






CHILL™ SLEEK DESIGN

And outstanding efficiency
Available in a range of capacities
with convenience features for
carefree cooling and heating.

WINDOW AIR CONDITIONERS

FITS WINDOWS FROM
20 1/8" TO 36" WIDE

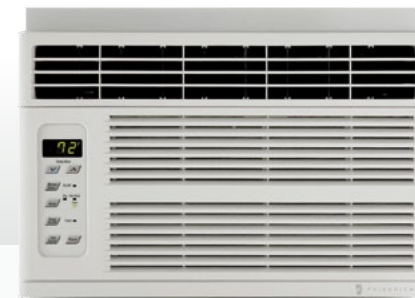

CP05

Chill™
5450 Btu
10.7 EER



COOL



Select MODE, FAN SPEED,
adjust TEMPERATURE and set
the TIMER.

CHILL™ SERIES PREMIUM LINE


Sleek white design and energy efficient operation, including heat/cool models.

Our efficient
line of room air
conditioners with
programmable
controls for
convenient
operation

AUTO AIR SWEEP SWING
LOUVERS FOR EVEN COOLING
THROUGHOUT THE ROOM.



FITS WINDOWS FROM
20 1/8" TO 42" WIDE

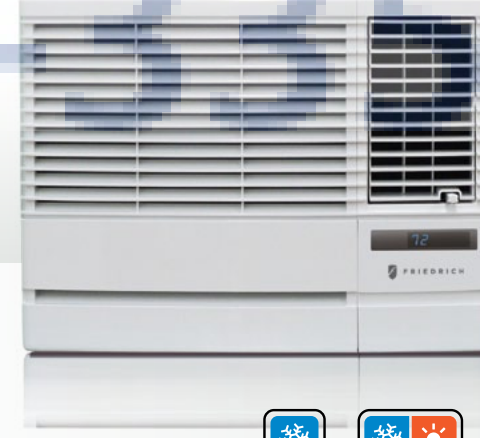

COOL



COOL & HEAT

Chill™
6000-23500 Btu
Up to 10.8 EER

Chill™+
Electric Heat
COOLING
8000-23500 Btu
Up to 9.8 EER
ELECTRIC HEAT
3850-12000 Btu

AjMadison
Your Appliance Authority™

800-570-3355

Comfort & Convenience

- 24-hour timer
- Auto air sweep swing louvers* provide more even air distribution
- 3 cooling speeds, plus 3 fan-only settings; 2 cooling speeds, 2 heating speeds, plus fan-only setting on Chill+
- Ultraquiet operation
- 4-way air flow control
- Auto-restart saves settings if power is interrupted

Energy Management & Compliance

- ENERGY STAR® qualified models
- Money Saver® setting saves money by operating the fan only when cooling

Health & IAQ

- Washable, antimicrobial air filter
- Stale air exhaust

Installation Features

- Slideout chassis*
- Install in window or thru-wall**
- Standard installation hardware
- Expandable side curtains
- Power cord can run either left or right out of the side of the unit front*


Safety & Security Features

- EntryGuard™ anti-intrusion protection



* Feature not available on CP05. ** CP05 has a fixed chassis and is for window installation only.

SPECIFICATIONS



Model	Cooling Btu	Heating Btu	Volts Rated	Cooling Amps	Cooling Watts	Heating Amps	Heating Watts	Energy Efficiency Ratio EER	Estimated Yearly Operating Cost	Moisture Removal-Pints/HR	CFM	Sleeve	Net Wt. lbs.	Ship Wt. lbs.	
Kühl®															
★ SQ05N10	5400	-	115	4.9	482	-	-	11.2	\$38	-	0.5	190	Q	72	85
★ SQ06N10	5800	-	115	4.9	527	-	-	11	\$42	-	0.5	190	Q	72	85
★ SQ08N10	8000	-	115	6.6	741	-	-	10.8	\$59	-	1.2	240	Q	71	84
★ SQ10N10	9600	-	115	9.2	980	-	-	9.8	\$78	-	2.1	240	Q	71	84
★ SS08N10A	7900	-	115	6.6	731	-	-	10.8	\$58	-	1.5	255	S	99	121
★ SS10N10	9500	-	115	7.7	848	-	-	11.2	\$67	-	2.5	300	S	106	128
★ SS12N10	12000	-	115	10	1111	-	-	10.8	\$88	-	3.0	300	S	112	134
★ SS14N10A	13500	-	115	10.8	1250	-	-	10.8	\$100	-	4.0	275	S	116	133
★ SS12N30	11500/11200	-	230/208	4.8/4.9	1055/1027	-	-	10.9/10.9	\$84	-	2.8	275	S	112	134
★ SS16N30	15500/15200	-	230/208	6.5/7.1	1449/1421	-	-	10.7/10.7	\$116	-	4.8	350	S	116	136
★ SM15N10	14800	-	115	12.0	1358	-	-	10.9	\$108	-	3.5	360	M	141	154
★ SM18N30	17500/17200	-	230/208	7.4/8.0	1635/1607	-	-	10.7/10.7	\$130	-	4.6	350	M	140	161
★ SM21N30	20500/20000	-	230/208	9.4/10.3	2181/2128	-	-	9.4/9.4	\$173	-	6.0	425	M	132	153
★ SM24N30A	23500/23200	-	230/208	12.7/13.6	2765/2730	-	-	8.5/8.5	\$221	-	7.1	430	M	152	167
★ SL24N30	24000/23800	-	230/208	11.2/12.0	2553/2532	-	-	9.4/9.4	\$203	-	7.0	640	L	191	212
★ SL28N30	27500/27000	-	230/208	13.5/14.4	2926/2872	-	-	9.4/9.4	\$233	-	8.5	640	L	193	214
★ SL36N30	36000/35700	-	230/208	19/20.5	4235/4200	-	-	8.5/8.5	\$337	-	12.0	725	L	212	233
Kühl® + (Heat Pump)															
★ YS10N10A*	9500	8000	115	6.4	915	7.3	870	10.4	\$73	2.7	2.0	300	S	109	131
★ YS12N33	11500/11300	9400/9000	230/208	5.2/5.4	1095/1076	5.6/5.8	1132/1139	10.5/10.5	\$87	2.4/2.3	3.0	375	S	115	136
★ YM18N34	17900/17700	15500/15400	230/208	8.5/8.9	1808/1788	8.5/8.7	1833/1761	9.9/9.9	\$144	2.5/2.6	5.4	370	M	141	154
★ YL24N35	23500/23000	23500/23200	230/208	11.1/12.0	2500/2447	12.2/14.3	2610/2575	9.4/9.4	\$199	2.6/2.6	7.0	600	L	197	211
Kühl®+ (Electric Heat)															
★ EQ08N11	7600	4000	115	6.7	724	11.2	1290	10.5	\$58	-	1.9	175	Q	72	84
★ ES12N33	11500/11200	10700/8900	230/208	4.8/4.9	1055/1027	16.0/14.7	3500/2900	10.9/10.9	\$84	-	2.8	275	S	113	128
★ ES16N33	15500/15200	10700/8900	230/208	6.5/7.1	1449/1421	16.0/14.7	3500/2900	10.7/10.7	\$116	-	4.8	350	S	117	133
★ EM18N34	17500/17200	13000/10600	230/208	7.4/8.0	1635/1607	19.5/17	4200/3500	10.7/10.7	\$131	-	4.6	350	M	141	154
★ EM24N34A	23500/23200	13000/10600	230/208	12.7/13.6	2765/2730	19.5/17	4200/3500	8.5/8.5	\$221	-	7.1	430	M	153	166
★ EL36N35	36000/35700	17300/14300	230/208	19/20.5	4235/4200	24.0/22.4	5500/4650	8.5/8.5	\$338	-	12.0	725	L	213	225
Chill™ (Cool Only)															
★ CP05G10	5450	-	115	4.8	500	-	-	10.7	\$40	-	1.5	140	P1	46	50
★ CP06G10	6000	-	115	5.1	560	-	-	10.7	\$45	-	1.8	200	P6	60	66
★ CP08G10	7800	-	115	6.8	720	-	-	10.8	\$58	-	2.2	250	P6	64	70
★ CP10G10	10000	-	115	8.5	920	-	-	10.8	\$73	-	3.0	300	P7	81	87
★ CP12G10	12000	-	115	10.2	1110	-	-	10.8	\$89	-	3.3	330	P7	87	93
★ CP15G10	15000	-	115	12.9	1400	-	-	10.7	\$112	-	4.0	400	P8	120	134
★ CP18G30	18000/17500	-	230/208	7.6/8.1	1680/1630	-	-	10.7/10.7	\$134	-	4.5	520	P9	136	150
★ CP24G30	23500/23000	-	230/208	11.4/12.4	2500/2450	-	-	9.4/9.4	\$196	-	6.8	590	P9	146	160
Chill™+ (Electric Heat)															
★ EP08G11	8000	3850	115	7.5	820	11.0	1260	9.8	\$65	-	2.6	265	P7	79	85
★ EP12G33	12000/11500	11200/9200	230/208	5.5/5.8	1220/1170	15.3/14.0	3500/2900	9.8/9.8	\$97	-	3.3	265	P7	87	93
★ EP18G33	18000/17500	12000/9800	230/208	8.3/9.0	1850/1800	15.0/16.0	3670/3100	9.7/9.7	\$148	-	5.5	430	P9	136	150
★ EP24G33	23500/23000	12000/9800	230/208	12.2/13.2	2760/2700	15.0/16.0	3670/3100	8.5/8.5	\$220	-	6.5	560	P9	146	160

* Operates on 115 volt and is not equipped with supplemental heat. Will not provide heat at temperatures below 40°F. Friedrich room air conditioners are designed to operate in outdoor temperatures from 60°F to 115°F.

Kühl+ Heat Pump heating information (shown in red) indicates heat pump performance. Kühl+ and Chill+ Electric Heat heating information (shown in red) indicates electric heat strip performance. For Kühl+ Heat Pump electric heating performance refer to corresponding Kühl+ Electric Heat model.

As an ENERGY STAR® partner, Friedrich Air Conditioning Co. has determined that the selected ENERGY STAR® models meet the ENERGY STAR® guidelines for energy efficiency.

The consumer- through the AHAM Room Air Conditioner Certification Program- can be certain that the AHAM Certification Seal accurately states the unit's cooling and heating capacity rating, the amperes and the energy efficiency ratio.

Estimated yearly operating cost based on a 2007 national average electricity cost of 10.65 cents per kWh.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.




INSTALLATION INFORMATION/SLEEVE DIMENSIONS

Sleeve	Height INCHES	Width INCHES	Depth with Front INCHES	Shell Depth to Louvers INCHES	Minimum Extension Into Room* INCHES	Minimum Extension Outside * INCHES	Window Width INCHES		In-wall Installation Finished Hole INCHES			Carton Dimensions INCHES		
			A	B			Minimum**	Maximum	Height	Width	Max. Depth C	Height	Width	Depth
Q	14"	19 3/4"	21 3/8"	8 1/2"	5 1/2"	10 3/4"	22"	42"	14 1/4"	20"	8 1/2"	18 3/4"	25 1/2"	22 3/4"
P1†	12"	18 1/2"	15"	5"	3 1/2"	10 3/4"	20 1/8"	36"	NOT FOR THRU-WALL			15 1/4"	22 1/4"	17 1/2"
P6	14"	18 3/8"	20 7/8"	8 1/8"	4 1/2"	11"	20 1/8"	36"	14 1/8"	18 7/8"	7 1/2"	17 7/8"	22 3/4"	22"
P7	15"	23 5/8"	21 3/4"	8 3/4"	4 1/2"	12"	25 1/4"	39"	15 1/4"	23 7/8"	8"	18 3/4"	26 3/4"	23 7/8"
P8	16 7/8"	26"	26 7/8"	10 1/4"	5 1/2"	16 5/8"	26 1/2"	42"	17 1/8"	26 1/4"	9"	21 1/2"	29 1/2"	29"
P9	16 7/8"	26"	30 3/8"	10 1/4"	5 1/2"	19 1/2"	26 1/2"	42"	17 1/8"	26 1/4"	9"	21 1/2"	33"	28 7/8"
S	15 15/16"	25 15/16"	29"	8 3/4"	5 3/4"	16 15/16"	27 3/8"	42"	16 3/16"	26 3/16"	7 3/8"	19"	34 1/2"	29"
M	17 15/16"	25 15/16"	29"	8 3/4"	5 3/4"	16 15/16"	27 3/8"	42"	18 3/16"	26 3/16"	7 3/8"	21"	34 1/2"	29"
L	20 3/16"	28"	35 1/2"	16 1/2"	5 3/8"	18 15/16"	29 7/8"	42"	20 3/8"	28 1/4"	15 1/8"	24 1/2"	38 7/8"	31 5/8"


* Minimum extensions when mounted in a window.
 ** Minimum widths achieved using one side curtain assembly as opposed to both in a standard installation.
 † Sleeve P1 does not have in-wall hole dimensions, as these units are fixed chassis and should not be installed in-wall.
 NOTE: S, M and L sleeves may be installed in window with no side kits if properly installed.

Circuit Rating/ Breaker

Model	Circuit Rating Breaker or T-D Fuse	Plug Face (NEMA#)	Power Cord Length (ft.)	Wall Outlet Appearance
CP05			6 1/2	
CP06G10, CP08G10, CP10G10, CP12G10 and CP15G10. EP08G11. All SQ MODELS, EQ08N11, SS08N10A, SS10N10, SS12N10 and SS14N10A. YS10N10A.	125V - 15A	5 - 15P	6	
CP18G30			4	
SS12N30, SS16N30, SM16N10, SM18N30 and SM21N30.	250V - 15A	6 - 15P	4 1/2	
CP24G30.			4	
EP12G33, EP18G33, EP24G33				
SM24N30A, SL24N30 and SL28N30. ES12N33 and ES16N33. YS12N33.	250V - 20A	6 - 20P	6	
SL36N30, EM18N34, EM24N34A and EL36N35. YM18N34 and YL24N35.	250V - 30A	6 - 30P	6	

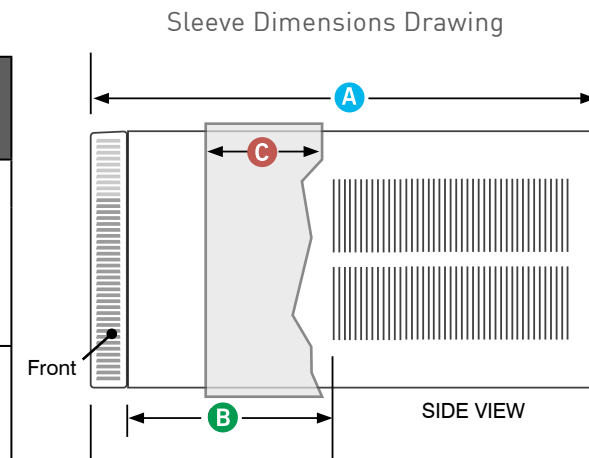

Room Air Conditioner Model Identification Guide

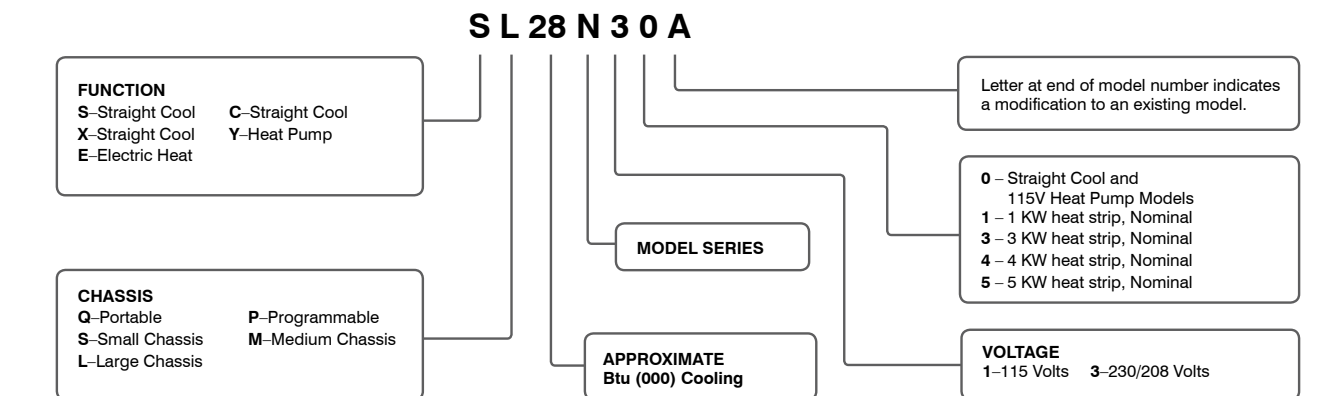



FRIEDRICH

Friedrich Air Conditioning Co. | 10001 Reunion Place, Suite 500 | San Antonio, TX 78216 | 877.599.5663 | www.friedrich.com