


WINDOW AIR CONDITIONER SPECIFICATIONS

MODEL			FFRA102ZA1	FFRA101ZAE	FFRH1122U1	FGRC084WA1	FGRQ0833U1	FFRE083ZA1	FFRH0822R1
		Type	Compact Air Conditioner	Compact Air Conditioner	Compact Slide-Out Chassis Air Conditioner with Heat Pump	Mini Compact WiFi Enabled Air Conditioner	Mini Compact Quiet Series Air Conditioner	Mini Compact Air Conditioner	Compact Slide-Out Chassis Air Conditioner with Heat Pump
PERFORMANCE		BTU (Cool)	10,200	10,200	11,000	8,000	8,000	8,000	8,000
		BTU (Heat)			3,500				3,500
		BTU (Heat Pump)			9,900				7,000
		Dehumidification (Pints/Hour)	2.5	2.5	3.4	1.7	1.7	1.9	1.7
		Cool Area (Up To Sq. Ft.)	450	450	500	350	350	350	350
		Combined Energy Efficiency Ratio	10.9	10.9	9.8	12.0	12.0	12.0	9.8
		Energy Efficiency Ratio	11.0	11.0	9.8	12.0	12.0	12.1	9.8
ELECTRICAL		Volts	115	115	115	115	115	115	115
		Amps (Cool)	9.3	9.3	9.0	6.4	5.8	6.6	7.0
		Amps (Heat)			12.0				12.0
		Amps (Heat Pump)			11.3				7.0
		Watts (Cool)	930	930	1,120	670	665	660	815
		Watts (Heat)			1,290				1,290
		Watts (Heat Pump)			1,035				730
		Length of Power Cord (Min. - Max.)	5' - 6'	5' - 6'	5' - 6'	6' - 6.5'	5' - 6'	5' - 6'	6' - 6.5'
		Plug Type (NEMA)	LCDI (6-30P)	LCDI (6-30P)	LCDI (6-30P)	LCDI (5-15P)	LCDI (6-30P)	LCDI (6-30P)	LCDI (5-15P)
CERT.		ENERGY STAR®				Yes	Yes	Yes	
		Performance	AHAM	AHAM	AHAM	AHAM	AHAM	AHAM	AHAM
SPECIFICATIONS	PRODUCT DIMEN.	Refrigerant	R32	R32	R410a	R410a	R410a	R32	R410a
		Shipping Weight (Approx.)	67 Lbs.	67 Lbs.	102 Lbs.	57 Lbs.	69 Lbs.	60 Lbs.	91 Lbs.
		A - Height	14-9/16"	14-9/16"	15-3/8"	13-13/32"	13-2/5"	12-3/4"	15-3/8"
		B - Width	19-1/32"	19-1/32"	22-5/8"	18-1/2"	21-1/4"	18-19/32"	22-5/8"
		C - Depth	21-1/4"	21-1/4"	23-3/10"	17-11/16"	19"	15-3/4"	23-5/16"
	WINDOW DIMEN.	D - Height	15-1/2"	15-1/2"	16-1/2"	14"	14"	13-1/4"	16-1/2"
		E - Width (Min. - Max.)	22" - 36"	22" - 36"	26-7/8" - 36"	23" - 36"	25-4/5" - 38-4/5"	22" - 36"	26-7/8" - 36"
		F - Max. Wall Thickness			6-1/10"				16-1/8"
	WALL CUT-OUT DIMEN.	Height			16-3/20"				23-3/16"
		Width			23-1/5"				6-1/8"


MODEL			FFRA082ZA1	FFRA081ZAE	FGRC064WA1	FGRQ0633U1	FFRE063ZA1	FFRA062ZA1	FFRA061ZAE
		Type	Mini Compact Air Conditioner	Mini Compact Air Conditioner	Mini Compact WiFi Enabled Air Conditioner	Mini Compact Quiet Series Air Conditioner	Mini Compact Air Conditioner	Mini Compact Air Conditioner	Mini Compact Air Conditioner
PERFORMANCE		BTU (Cool)	8,000	8,000	6,000	6,000	6,000	6,000	6,000
		Dehumidification (Pints/Hour)	2.3	2.3	1.3	1.3	1.5	1.5	1.5
		Cool Area (Up To Sq. Ft.)	350	350	250	250	250	250	250
		Combined Energy Efficiency Ratio	10.9	10.9	12.1	12.1	12.1	11.0	11.0
		Energy Efficiency Ratio	11.0	11.0	12.2	12.2	12.3	11.2	11.2
ELECTRICAL		Volts	115	115	115	115	115	115	115
		Amps (Cool)	7.4	7.4	4.6	4.3	5.1	5.2	5.2
		Watts (Cool)	730	740	500	490	490	540	540
		Length of Power Cord (Min. - Max.)	5' - 6'	5' - 6'	5' - 6'	5' - 6'	5' - 6'	5' - 6'	5' - 6'
		Plug Type (NEMA)	LCDI (6-30P)	LCDI (6-30P)	LCDI (6-30P)	LCDI (6-30P)	LCDI (6-30P)	LCDI (6-30P)	LCDI (6-30P)
CERT.		ENERGY STAR®			Yes	Yes	Yes		
		Performance	AHAM	AHAM	AHAM	AHAM	AHAM	AHAM	AHAM
SPECIFICATIONS	PRODUCT DIMEN.	Refrigerant	R32	R32	R32	R410a	R32	R32	R32
		Shipping Weight (Approx.)	55 Lbs.	55 Lbs.	52 Lbs.	63 Lbs.	53 Lbs.	51 Lbs.	51 Lbs.
		A - Height	12-3/4"	12-3/4"	13-2/5"	13-2/5"	12-3/4"	12-3/4"	12-3/4"
		B - Width	18-3/5"	18-3/5"	18-1/2"	21-1/4"	18-3/5"	18-3/5"	18-3/5"
		C - Depth	15-3/4"	15-3/4"	17-3/5"	19"	15-3/4"	15-3/4"	15-3/4"
	WINDOW DIMEN.	D - Height	13-1/4"	13-1/4"	14"	14"	13-1/4"	13-1/4"	13-1/4"
		E - Width (Min. - Max.)	22" - 36"	22" - 36"	23" - 36"	25-4/5" - 38-4/5"	22" - 36"	22" - 36"	22" - 36"
		F - Max. Wall Thickness							
	WALL CUT-OUT DIMEN.	Height							
		Width							

NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com

WINDOW AIR CONDITIONER SPECIFICATIONS

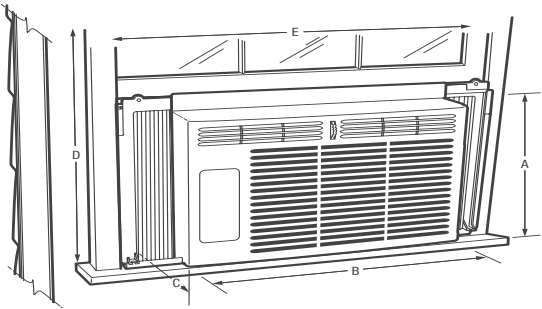

MINI AIR CONDITIONER

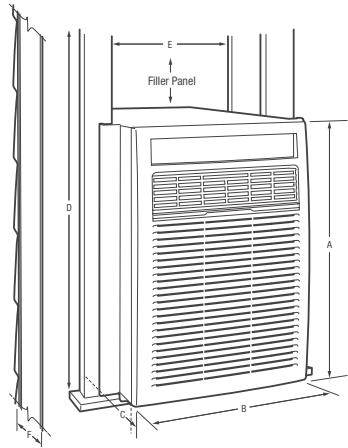

SLIDER/CASEMENT AIR CONDITIONER

Plug Type:



Plug Type (NEMA) 5-15P



Plug Type (NEMA) 6-30P

MINI & SLIDER/CASEMENT AIR CONDITIONERS

MODEL			FFRE053ZA1	FFRA052ZA1	FFRA051ZA1	FFRS1022R1	FFRS0822S1
		Type	Mini Air Conditioner	Mini Air Conditioner	Mini Air Conditioner	Slider / Casement Air Conditioner	Slider / Casement Air Conditioner
PERFORMANCE		BTU (Cool)	5,200	5,050	5,050	10,000	8,000
		Dehumidification (Pints/Hour)	1.4	1.6	1.6	3.4	1.7
		Cool Area (Up To Sq. Ft.)	150	150	150	450	350
		Combined Energy Efficiency Ratio	12.1	11.0	11.0	10.4	10.8
		Energy Efficiency Ratio	12.4	11.2	11.2	10.4	10.9
ELECTRICAL		Volts	115	115	115	115	115
		Amps (Cool)	4.2	4.5	4.0	8.5	6.6
		Watts (Cool)	420	450	450	960	740
		Length of Power Cord (Min. - Max.)	5' - 6'	5' - 6'	5' - 6'	6' - 6.5'	6' - 6.5'
		Plug Type (NEMA)	LCDI (6-30P)	LCDI (6-30P)	LCDI (6-30P)	LCDI (5-15P)	LCDI (5-15P)
		Performance	AHAM	AHAM	AHAM	AHAM	AHAM
SPECIFICATIONS	PRODUCT DIMEN.	Refrigerant	R32	R32	R32	R410a	R410a
		Shipping Weight (Approx.)	51 Lbs.	47 Lbs.	47 Lbs.	84 Lbs.	79 Lbs.
		A - Height	12-3/4"	11-7/8"	11-7/8"	20-1/4"	20-1/4"
		B - Width	18-3/5"	16-1/16"	16-1/16"	14-1/5"	14-1/5"
		C - Depth	15-3/4"	16-7/32"	16-7/32"	23-1/2"	23-1/2"
	WINDOW DIMEN.	D - Height (Min.)	13-1/4"	14-1/2"	14-1/2"	21-1/2"	21-1/2"
		E - Width (Min. - Max.)	22" - 36"	23" - 36"	23" - 36"	15-1/2"	15-1/2"
		F - Max. Wall Thickness				8-1/2"	8-1/2"
	WALL CUT-OUT DIMEN.	Height					
		Width					

NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com