

**Miele**

## 48" Island Ventilation Hood

DA 4248V D



## 48" Island Ventilation Hood


SPECIFICATIONS	
Canopy Dimensions	47 <sup>3</sup> / <sub>16</sub> " (1198mm) W x 2 <sup>3</sup> / <sub>4</sub> " (70mm) H x 27 <sup>1</sup> / <sub>8</sub> " (698mm) D
Unit Height - Vented	29 <sup>3</sup> / <sub>4</sub> " (755mm) - 41 <sup>7</sup> / <sub>16</sub> " (1045mm)
Fan	
Fan Speeds	4
Maximum CFM	625 CFM
Duct	
Recommended Duct Diameter	6" (150mm)
Electrical	
Electrical Requirements	120 V, 60 Hz, 15 Amps
Power Cord Requirements	The hood must be hard wired. Power cord will need to be a minimum 11 <sup>13</sup> / <sub>16</sub> " (300 mm) in length is required between the ceiling and the hood connectors. (Not supplied)
Electrical Rating	518 W (Blower: 350 W; Lighting: 4x3 W; Height adjustment motor: 150 W)
Shipping	
Shipping Weight	107.8 lbs (49kg)
Shipping Dimensions	53 <sup>3</sup> / <sub>4</sub> " W x 48 <sup>1</sup> / <sub>16</sub> " H x 34 <sup>1</sup> / <sub>16</sub> " D
Optional Accessories	
CFM Reducing Collar	R2000
Support	
Call Miele	(800) 999-1360
Miele Website	<a href="http://www.mieleusa.com">www.mieleusa.com</a>
20/20 Link	<a href="http://2020technologies.com">2020technologies.com</a>



DA 4248V D  
Item 28424855USA

## 48" Island Ventilation Hood

### PRODUCT VIEW

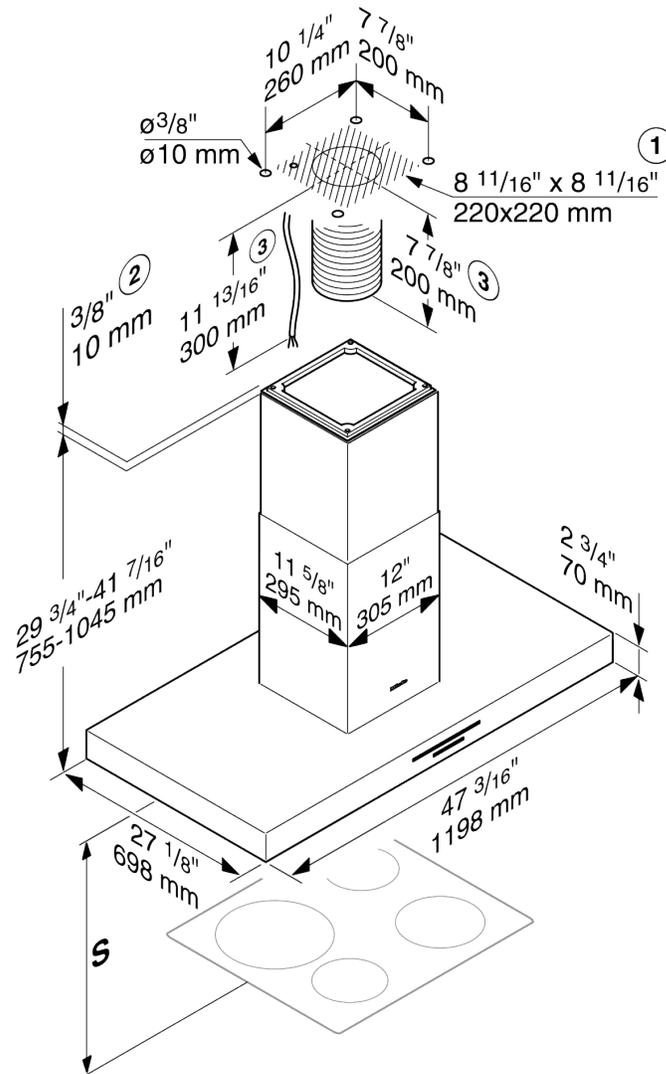

- 1) Mounting area for exhaust ducting and power cable.
- 2) Alternative installation with spacer frame
- 3) A power cord is required to connect the hood to the power supply. (Not supplied)  
Exhaust connection diameter 6" (150 mm)

## 48" Island Ventilation Hood

### INSTALLATION SPECIFICATIONS

#### Distance Between Cooktop and Ventilation Hood (S)

Provided a larger distance is not given by the manufacturer of the cooktop, follow the minimum safety distances between a cooktop and the bottom of the hood.

Please also observe the information contained in the "IMPORTANT SAFETY INSTRUCTIONS" section.

Cooking appliance	Minimum distance S	
	Miele appliance	Non-Miele appliance
Electric Cooktops	24" (610 mm)	
Electric Barbeques and Fryers	26" (660 mm)	
Multiburner Gas Cooktops ≤ 43,000 BTU/hr (12.6 kW), no burner > 15,000 BTU/hr (4.5 kW).	26" (660 mm)	30" (760 mm)
Multiburner Gas Cooktops ≤ 73,800 BTU/hr (21.6 kW), no burner > 16,500 BTU/hr (4.8 kW)	30" (760 mm)	
Multiburner Gas Cooktops > 73,800 BTU/hr (21.6 kW), or one of the burners > 16,500 BTU/hr (4.8 kW)	Not possible	
Single Burner Gas Cooktops ≤ 20,500 BTU/hr (6 kW)	26" (660 mm)	30" (760 mm)
Single Burner Gas Cooktops > 20,500 BTU/hr (6 kW) ≤ 27,600 BTU/hr (8.1 kW)	30" (760 mm)	
Single Burner Gas Cooktops > 27,600 BTU/hr (8.1 kW)	Not possible	