

## 36-INCH FRENCH DOOR BUILT-IN PANEL-READY

DRF365300AP





## PRODUCT FEATURES

- Full height door with true flush cabinet integration without exposed venting grille
- ♦ MetalCool<sup>™</sup> Interior illuminated by 3DLighting<sup>™</sup>
- ♦ FreshZone<sup>™</sup> Drawer with three customizable temperatures for Meat/Fish, chilled drinks and dairy
- Internal Water Dispenser for easy access to clean, filtered water

GENERAL PROPERTIES	
PANEL READY	YES
INTERNAL WATER DISPENSER	YES
ICEMAKER	STANDARD ICE
DEODORIZING FILTER	YES
LIGHTING	3D LIGHTING™
INTERIOR MATERIAL	METALCOOL™ INTERIOR
FULL WIDTH SHELVES - REFRIGERATOR	2 EA
ADJUSTABLE SHELVES - REFRIGERATOR	2 EA
SHELF MATERIAL - REFRIGERATOR	TEMPERED GLASS SPILL-PROOF SHELVES
FULL EXTENSION DRAWERS AT 900 DOOR OPENING ANGLE	YES
FRESHZONE™ DRAWER	YES - CHEESE (37°F) / COLD DRINKS (33°F) / MEAT (29°F)
CRISPER DRAWERS	2 EA
DOOR BINS -REFRIGERATOR	6 EA
FREEZER DRAWERS	2 EA
DOOR OPEN ALARM	YES
SPECIAL MODES	SABBATH MODE
CAPACITY	
TOTAL UNIT GROSS CAPACITY (CU.FT.) - AHAM	21.3 CU. FT.
REFRIGERATOR GROSS CAPACITY (CU.FT.)	14.5 CU. FT.
FREEZER GROSS CAPACITY (CU.FT.)	6.8 CU. FT.
PERFORMANCE	
DOUBLE COOLING (2 EVAPORATORS, 1 COMPRESSOR)	YES
POWER COOL - REFRIGERATOR	YES
DEFROST PROCESS - FREEZER	YES
PRECISE COOLING	FROST-FREE
PRECISE COOLING	YES
EFFICIENCY	
ENERGY STAR® QUALIFIED	YES
ANNUAL ENERGY CONSUMPTION	549 KWH/YEAR
TECHNICAL DETAILS	
	6
CURRENT (A)	0
CURRENT (A) VOLTS (V)	115
VOLTS (V)	115
VOLTS (V) FREQUENCY (HZ)	115 60
VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.)	115 60 78 3/4"
VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE	115 60 78 3/4"
VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE TEMPERATURE RANGES	115 60 78 3/4" 120 V, 3 PRONG
VOLTS (V) FREQUENCY (HZ) POWER CORD LENGTH (IN.) PLUG TYPE <b>TEMPERATURE RANGES</b> REFRIGERATOR	115 60 78 3/4" 120 V, 3 PRONG 34°(1°) TO 44°(7°)
VOLTS (V)   FREQUENCY (HZ)   POWER CORD LENGTH (IN.)   PLUG TYPE   TEMPERATURE RANGES   REFRIGERATOR   REFRIGERATOR - POWER COOL	115 60 78 3/4" 120 V, 3 PRONG 34°(1°) TO 44°(7°) 34°(1°)

## DIMENSIONS & WEIGHT


APPLIANCE DIMENSIONS (H X W X D) (IN.) REQUIRED CUTOUT SIZE (HXWXD) (IN.) NET WEIGHT (LBS)


83 3/8" X 35 3/4" X 23 13/16" 84" X 36" X 25" 562 LBS.




APPLIANCE DIMENSIONS	
A (WIDTH)	35 3/4" (908MM)
B (DEPTH)	25" (635MM)
C (HEIGHT)	83 3/8" (2118MM) - FRONT
D	35 5/8" (905MM)
E	44 7/8" (1140MM)
F	20 9/16" (496MM)
G	44" (1118MM)

0	






A



INSTALLATION CUTOUT DIMENSIONS		
A (WIDTH)	36" (914MM)	
B (DEPTH)	25" (635MM)	
C (HEIGHT)	84" (2134MM)	
D	26" (660MM)	
E	80" (2032MM)	

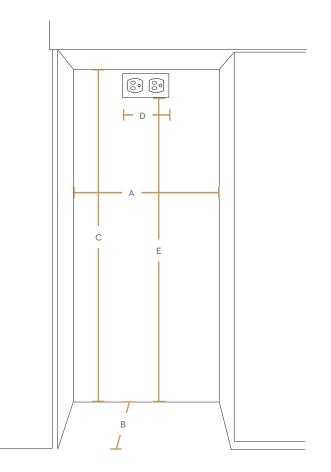

ACCESSORIES	
FRENCH-DOOR TRANSITIONAL REFRIGERATOR SILVER STAINLESS PANEL KIT: SILVER STAINLESS	RAF36ACAASR
FRENCH-DOOR REFRIGERATOR PRO PANEL KIT: SILVER STAINLESS	RAF36AHAASR
FRENCH-DOOR CONTEMPORARY REFRIGERATOR GRAPHITE PANEL KIT: GRAPHITE STAINLESS	RAF36AMAAMS
FRENCH-DOOR CONTEMPORARY REFRIGERATOR SILVER STAINLESS PANEL KIT: SILVER STAINLESS	RAF36AMAASR
FRENCH-DOOR REFRIGERATOR EPICURE PANEL KIT: SILVER STAINLESS	RAF36AEAASR
WATER FILTER	RACOOWFAAAA
DEODORIZING FILTER	RACOODFAAAA
WARRANTY	
LIMITED, ENTIRE APPLIANCE, PARTS AND LABOR ON ANY PART OF THE REFRIGERATOR	2 YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS AND LABOR	3RD TO 6TH YEAR
LIMITED WARRANTY FOR SEALED REFRIGERATION SYSTEM; PARTS ONLY	7TH TO 12TH YEAR
LIMITED WARRANTY FOR COMPRESSOR; PARTS ONLY	13TH TO 15TH YEAR