

18 INCH TOP CONTROL SLIM DISHWASHER

DWS55100SS / DWS55100FBI





8 place settings
5 programs
49 dBA silent operation
FlexiRack
NSF certified function
Allin1 tablet detergent function
Fast function
Turbo fan drying
Flow through heater
3way euro filtering system
smartFIT front adjustable rear feet
smartBALANCE adjustable hinge system

Built-in high loop with air gap DMFS Double motion float system Stainless steel tank Fingerprint-free stainless steel

Dimensions

H x W X D: 32 1/4" x 17 5/8" x 21 9/16" ADA compatible Fits in European kitchen under counter spaces

In Harmony with Nature



Blomberg believes your home should be as smart as you are, in every sense of the word. That includes performing flawlessly while protecting the planet. It's a philosophy that earned us the ENERGY STAR® 2017 Partner of the Year Award and elevated this dishwasher to the 2017 ENERGY STAR® Most Efficient list, which recognizes products delivering cutting-edge energy conservation with the latest in technological innovation.

In Harmony with Your Life



Silent Operation

When your home is your sanctuary, you don't want to have to leave the room or only run the dishwasher late at night. Quality engineered with three layers of noise-suppressing insulation and advanced Brushless DC™ motor technology that optimizes working speed and lowers wash-cycle noise, Blomberg dishwashers are among the quietest on the market.



FlexiBack

When the need arises, the hard-working upper rack can be raised to make room for pans, platters, and trays in the bottom rack or lowered to accommodate tall glasses up top. FlexiRack allows you to adjust the height in one simple action, even when the rack is fully loaded.




18 INCH TOP CONTROL SLIM DISHWASHER


DWS55100SS / DWS55100FBI

control Type osition JAIN FEATURES oading Capacity (place settings) ub material uner door material uterior illumination //ater Softener MFS overflow protection level wash with 3rd spray arm leay timer up to 1-24 hours	Electronic Top 8 Stainless Steel Stainless Steel No No Yes Yes Yes Yes Condensation Yes
AIN FEATURES oading Capacity (place settings) ub material ner door material nterior illumination /ater Softener MFS overflow protection level wash with 3rd spray arm level wash out o 1-24 hours -way euro filter rrying rushless DC motor urbidity sensor illence level, dBA roCare Illin1 tablet function	8 Stainless Steel Stainless Steel No No Yes Yes Yes Yes Condensation
oading Capacity (place settings) ub material interior illumination /ater Softener IMFS overflow protection level wash with 3rd spray arm level wash rot 1-24 hours -way euro filter rrying rushless DC motor urbidity sensor illence level, dBA roCare Illin1 tablet function	Stainless Steel Stainless Steel No No Yes Yes Yes Yes Condensation
ub material iner door material interior illumination //ater Softener //MFS overflow protection level wash with 3rd spray arm telay timer up to 1-24 hours -way euro filter rrying rushless DC motor urbidity sensor illence level, dBA roCare Illin1 tablet function	Stainless Steel Stainless Steel No No Yes Yes Yes Yes Condensation
nterior illumination //ater Softener MFS overflow protection level wash with 3rd spray arm lelay timer up to 1-24 hours	Stainless Steel No No Yes Yes Yes Yes Condensation
Vater Softener MFS overflow protection level wash with 3rd spray arm lelay timer up to 1-24 hours -way euro filter rrying rushless DC motor urbidity sensor illence level, dBA roCare Illin1 tablet function	No Yes Yes Yes Yes Condensation
MFS overflow protection level wash with 3rd spray arm lelay timer up to 1-24 hours -way euro filter rrying rushless DC motor urbidity sensor ilence level, dBA roCare Ilin1 tablet function	Yes Yes Yes Yes Condensation
level wash with 3rd spray arm lelay timer up to 1-24 hours -way euro filter rying rushless DC motor urbidity sensor ilence level, dBA roCare Ilin1 tablet function	Yes Yes Yes Condensation
lelay timer up to 1-24 hours -way euro filter rrying rushless DC motor urbidity sensor ilence level, dBA roCare Ilin1 tablet function	Yes Yes Condensation
-way euro filter rying rushless DC motor urbidity sensor ilence level, dBA roCare Ilin1 tablet function	Yes Condensation
rrying rushless DC motor urbidity sensor illence level, dBA roCare Ilin1 tablet function	Condensation
rushless DC motor urbidity sensor ilence level, dBA roCare Ilin1 tablet function	
urbidity sensor ilence level, dBA roCare Ilin1 tablet function	
ilence level, dBA roCare Ilin1 tablet function	Yes
llin1 tablet function	49dBA
	Yes
/2 Load function	Yes
	Yes
anitize function	No
xtraRinse function	Yes
uperGloss function	No Yes
apidClean function lowerWash function	Yes No
elf-Cleaning Filter	No
martPIN handle	Yes
nterior high loop with airgap	No
ower Plug	Yes
ROGRAMS	
umber of programs	5
ots and pans plus (167F rinse temperature)	Yes
ots and pans (158F rinse temperature) uto program (131F - 149F rinse temperature)	No No
lixWash+ (131F - 149F rinse temperature)	No No
legular wash (142F-145F rinse temperature)	Yes
ailyWash	Yes
hina/crystal (149F rinse temperature)	No
ilassCare	No
uick wash (131F rinse temperature)	Yes
linse & Hold	Yes
ISPLAY	Yes/Digital Display
rogram sequence linse aid indicator	Electronic
linse aid indicator Linse aid indicator display	Yes
alt indicator display	No
ight indicator on floor	No
ACK SYSTEM	
martFOLD lower rack folding tines	Yes
ower rack embossed stainless handle	No
tutlery basket	Slim Size
pper rack (inset shelves)	4 No
martFOLD, upper rack folding tines lexiRack. adiustable upper rack	Loaded
lexiDrawer, removable 3rd rack	No
ower basket wine glass holder	No
ylon coated racks	Yes
IMENSIONS	
xWxD, in	32 1/4" x 17 5/8" x 21 9/16"
roduct weight, lbs.	90
xWxD, cm	82 x 44.8 x 54.8
roduct weight, kg	41
NVIRONMENTAL STANDARDS nergy Star qualified	Yes
nergy Star qualified nergy consumption, kWh/year	220
g, conoumption, keenly your	2.54 - 4.07
/ater consumption, gal/cvcle	Yes
/ater consumption, gal/cycle loHS compliant (Lead free)	
oHS compliant (Lead free)	DWS55100SS

Dimensions and Installation

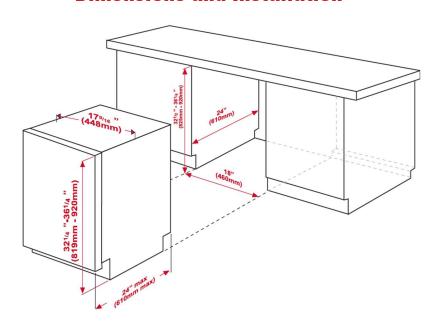

Panel requirements for panel ready models:

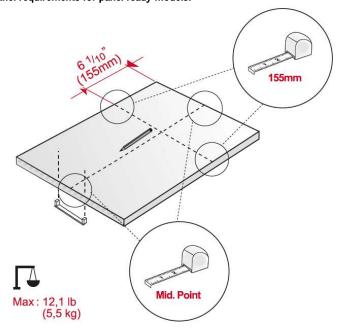

NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko US Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website www.blombergappliances.us or call 888 352 2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.