DWT 25200 SSWS Tall Tub Dishwasher with Water Softener

14 Place settings Slim panel front control digital LCD display







Main Features

5 programs 3 wash temperatures Condensing drying system 50 dBA wash noise level Digital program follow-up display Time delay up to 9:30 hrs. Allin1 tablet detergent function 1/2 Load function 3 way euro filtering system smartFIT™ front adjustable rear feet Power plug Built-in water softener Electronic salt display

Interior design

All stainless steel tank Three spray arms (lower, upper and ceiling)

Premium rack loading system

FlexiRack™ loaded adjustable upper rack Upper rack handle 4 adjustable mug shelves Sliding cutlery basket smartFOLD™ plate supports on lower rack Stainless Blomberg embossed lower rack handle

DWT 25200 SSWS: Stainless steel

Features



14 Place settings

Blomberg dishwasher can perfectly clean dishes up to 14 place settings without leaving any piece of cutlery out.



Double motion float system

All Blomberg dishwashers have a double motion float system (DMFS) that provides maximum security against water damage and a bottom tray to prevent flooding.



Digital display

The electronic display is a quick and easy way to select your programs. Additionally, models with top control panel wih numerical display offer a noise level adjustable "end of cycle audible signal". Hidden control panel prevents your children from changing programs and playing with your dishwasher.



5 Level wash

The 5 level wash system ensures immaculately clean dishes by spraying water from every direction.



Silent wash

By utilizing three layers of insulation including bituminous material, cotton insulation and side walls and with its advanced motor technology Blomberg dishwashers are among the guitest models in the market.




Blomberg dishwashers provide the best performance with all types of compact detergents.



DWT 25200 SSWS Tall Tub Dishwasher with Water Softener

14 Place settings Slim panel front control digital LCD display

Control Type	Stainless Steel		DWT 25200 Series
Control Type Electronic Position Front MAIN FEATURES Loading Capacity (place settings) 14 Tub material Stainless Steel Inner door material Stainless Steel Inner door material Stainless Steel Inner door material Stainless Steel Interior illumination - Water Softener ✓ DMFS overflow protection ✓ 5 level wash with 3 spray arms ✓ Delay timer up to 9:30 hrs ✓ A O Drying Condensation Brushed ✓ Drying Condensation Turbidity sensor ✓ Silence level, dBA 50 dBA Allini Tablet fu	CONTROLS		
Position			Electronic
Loading Capacity (place settings) 14 Tub material Stainless Steel Inner door material Stainless Steel Interior illumination - Water Softener ✓ Water Softener ✓ DMFS overflow protection ✓ 5 level wash with 3 spray arms ✓ Delay timer up to 9:30 hrs ✓ 3 way euro filter ✓ Drying Condensation Brushless DC™ motor - Turbidity sensor ✓			
Tub material Stainless Steel Inner door material Stainless Steel Intertor illumination - Water Softener √ DMFS overflow protection √ 5 level wash with 3 spray arms √ Delay timer up to 9:30 hrs √ 3 way euro filter √ Drying Condensation Brushless DC™ motor - Turbidity sensor √ Silence level, dBA 50 dBA Allini Tablet function √ 1/2 Load function √ SmartPNI™ joint - Power Plug √ Power Plug √ PROGRAMS Number of programs Number of programs 5 Rinse & Hold √ Quick wash (1319° rinse temp) √ Voluck wash (1319° rinse temp) √ Pots and pans plus (1679° rinse temp) √ Pots and pans plus (1679° rinse temp) √ Pots and pans plus (1679° rinse temp) √ Program sequence √/ LCD Display	MAIN FEATURES		
Tub material Stainless Steel Inner door material Stainless Steel Intertor illumination - Water Softener √ DMFS overflow protection √ 5 level wash with 3 spray arms √ Delay timer up to 9:30 hrs √ 3 way euro filter √ Drying Condensation Brushless DC™ motor - Turbidity sensor √ Silence level, dBA 50 dBA Allini Tablet function √ 1/2 Load function √ SmartPNI™ joint - Power Plug √ Power Plug √ PROGRAMS Number of programs Number of programs 5 Rinse & Hold √ Quick wash (1319° rinse temp) √ Voluck wash (1319° rinse temp) √ Pots and pans plus (1679° rinse temp) √ Pots and pans plus (1679° rinse temp) √ Pots and pans plus (1679° rinse temp) √ Program sequence √/ LCD Display			14
Interior illumination	Tub material		Stainless Steel
Water Softener	Inner door material		Stainless Steel
DMFS overflow protection ✓ 5 level wash with 3 spray arms ✓ Delay timer up to 9:30 hrs ✓ 3 way euro filter ✓ Drying Condensation Brushless DC™ motor - Turbidity sensor ✓ Silience level, dBA 50 dBA Allin1 Tablet function ✓ SmartPIN™ joint - Power Plug ✓ PROGRAMS S Number of programs 5 Rinse & Hold ✓ Quick wash (131°P rinse temp) ✓ China/crystal (148°F rinse temp) ✓ Pots and pans (158°F rinse temp) ✓ Pots and pans (158°F rinse temp) ✓ Pots and pans plus (16°7°F rinse temp) ✓	Interior illumination		-
5 level wash with 3 spray arms ✓ Delay timer up to 9:30 hrs ✓ 3 way euro filter ✓ Drying Condensation Brushless DC™ motor - Turbidity sensor ✓ Silence level, dBA 50 dBA Allin1 Tablet function ✓ 1/2 Load function ✓ SmartPNI™ joint - Power Plug ✓ PROGRAMS Number of programs Rinse & Hold ✓ Quick wash (131°F rinse temp) ✓ China/crystal (149°F rinse temp) ✓ China/crystal (149°F rinse temp) ✓ Pots and pans (158°F rinse temp) ✓ Pots and pans [158°F rinse temp) ✓ Pots and pans [168°F rinse temp) ✓	Water Softener		✓
Delay timer up to 9:30 firs ✓ 3 way euror filter ✓ Drying Condensation Brushless DC™ motor - Turbidity sensor ✓ Silence level, dBA 50 dBA Allin1 Tablet function ✓ 1/2 Load function ✓ SmartPINT™ joint - Power Plug ✓ PROGRAMS Number of programs Number of programs 5 Rinse & Hold ✓ Quick wash (131°F rinse temp) ✓ Pots and pans (142°F-145°F rinse temp) ✓ Pots and pans (142°F-145°F rinse temp) ✓ Pots and pans plus (167°F rinse temp) ✓ Pots and pans plus (167°F rinse temp) ✓ Program sequence ✓ / LCD Display Rinse aid indicator Electronic Rinse aid indicator display ✓ PRACK SYSTEM ✓ smartFOLD lower rack folding tines ✓ Lower rack embossed stainless handle ✓ Cuttery basket Sliding Upper rack (inse	DMFS overflow protection		✓
3 way euro filter Drying Condensation Brushless DC™ motor Turbidity sensor Silence level, dBA Allin1 Tablet function √ 7/2 Load function SmartPIN™ joint - PROGRAMS Number of programs Rinse & Hold Quick wash (131°F rinse temp) √ China/crystal (149°F rinse temp) ✓ Pets and pans (158°F rinse temp) Pots and pans glus (167°F rinse temp) Pots and pans plus (167°F rinse temp) Auto program (131°F - 149°F rinse temp) Pots and pans glus (167°F rinse temp) Auto program (131°F - 149°F rinse temp) Fogram sequence Rinse aid indicator Rinse aid indicator Rinse aid indicator (Electronic Rinse aid indicator (Biplay ✓ RACK SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle ✓ Cuttery basket Sliding Upper rack (inset shelves) SmartFOLD, upper rack folding tines ✓ FlexiRack, adjustable upper rack Loaded FlexiDrawer, removable 3rd rack ✓ DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 Cm 88,9 x 64.4 x 66.1 Packed Weight Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 Cm 86 x 59.8 x 54.8 Unpacked Weight	5 level wash with 3 spray arms		/
Drying Condensation Brushless DC™ motor - Turbidity sensor J Silence level, dBA 50 dBA Allin1 Tablet function J 1/2 Load function J SmartPNI™ joint - Power Plug J PROGRAMS S Number of programs 5 Rinse & Hold J Quick wash (131°F rinse temp) J China/crystal (149°F rinse temp) J Regular wash (142°F-145°F rinse temp) J Pots and pans (158°F rinse temp) J Pots and pans plus (167°F rinse temp) J Auto program (131°F - 149°F rinse temp) J Pots and pans plus (167°F rinse temp) J Program sequence J LCD Display Rinse aid indicator Electronic Rinse aid indicator display J Salt indicator display J RACK SYSTEM S smartPoLD lower rack folding tines J Lower rack embossed stainless handle J Lower rack (inse	Delay timer up to 9:30 hrs		/
Brushless DCTM motor Turbidity sensor Silence level, dBA Allini Tablet function 1/2 Load function 7/2 Load function 7/2 Load function 7/2 Load function 7/2 Load function 7/2 Load function 7/2 Load function 7/2 Load function 7/2 Load function 7/3 Load function 7/4 Load function 7/5 Load function 7/6 Load function 7/7 Load function 7/7 Load function 7/8 Load function 7/8 Load function 7/8 Load function 8/8 Load function 8/	3 way euro filter		✓
Turbidity sensor Silence level, dBA Allin1 Tablet function J' Load function J' Load function J' PROGRAMS Number of programs Rinse & Hold Quick wash (131°F rinse temp) China/crystal (149°F rinse temp) J' China/crystal (149°F rinse temp) Pots and pans (158°F rinse temp) Pots and pans plus (167°F rinse temp) J' China/crystal (149°F rinse temp) Pots and pans plus (167°F rinse temp) J' China/crystal (149°F rinse temp) J' LOD Display Regular wash (142°F rinse temp) J' LOD Display Finse aid indicator display J' LOD Display Rinse aid indicator display J' LOD Display RACK SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle J' Cutlery basket Sliding Upper rack (inset shelves) A smartFOLD, upper rack folding tines J' EnexiBrack, adjustable upper rack FlexiBrack, adjustable upper rack Rinse did (hKWXD) In 35 x 25 3/16 x 26 Cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HKWXD) In 33 7/8 x 23 9/16 x 21 5/8 Cm 86 x 59.8 x 54.8 Energy Star qualified			Condensation
Silence level, dBA Allin1 Tablet function √ 1/2 Load function √ SmartPINT™ joint Power Plug PROGRAMS Number of programs Sinse & Hold Quick wash (131ºF rinse temp) China/crystal (149ºF rinse temp) ✓ China/crystal (149ºF rinse temp) ✓ China/crystal (149ºF rinse temp) Pots and pans (158ºF rinse temp) Pots and pans plus (167ºF rinse temp) ✓ Pots and pans plus (167ºF rinse temp) Pots and pans plus (167ºF rinse temp) ✓ Auto program (131ºF - 149ºF rinse temp) Porgram sequence Finse aid indicator display Program sed indicator display Fack SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Upper rack (inset shelves) SmartFOLD, upper rack folding tines ✓ FlexiRack, adjustable upper rack FlexiDrawer, removable 3rd rack Nylon coated racks ✓ DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight Energy Star qualified ✓ V PROGRAMS Some Tend function √ Come Sex y 3 y 44/3 Energy Star qualified ✓ V Come Sex y 54.8 Energy Star qualified			-
Allin1 Tablet function 1/2 Load function √ SmartPNI™ joint - Power Plug PROGRAMS Number of programs Rinse & Hold Quick wash (131°F rinse temp) China/crystal (149°F rinse temp) Pots and pans (158°F rinse temp) Pots and pans plus (167°F rinse temp) Pots and pans plus (167°F rinse temp) Pots and pans plus (167°F rinse temp) Porgram sequence Rinse aid indicator Rinse aid indicator display Auto program (131°F - 149°F rinse temp) Program sequence Rinse aid indicator display ACK SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Upper rack (inset shelves) smartFOLD, upper rack folding tines Lower rack embossed stainless handle Cutlery basket Loaded FlexiPack, adjustable upper rack Loaded FlexiDrawer, removable 3rd rack Nylon coated racks DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88 9 x 64.4 x 66.1 Packed Weight Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight Unpacked Weight Unpacked Weight Energy Star qualified ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓			-
1/2 Load function SmartPIN™ joint - Power Plug PROGRAMS Number of programs Sinse & Hold Quick wash (131ºF rinse temp) China/crystal (149ºF rinse temp) China/crystal (149ºF rinse temp) Pots and pans (158ºF rinse temp) Pots and pans plus (167ºF rinse temp) - Pots and pans plus (167ºF rinse temp) Auto program (131ºF - 149ºF rinse temp) - DISPLAY Program sequence Rinse aid indicator Rinse aid indicator display Salt indicator display ARCK SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Sliding Upper rack (inset shelves) smartFOLD, upper rack folding tines - V FIEVENDRAMS FIEVENDRAMS FIEVENDRAMS FIEVENDRAMS FIEVENDRAMS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight Unpacked Weight (Ib/kg) 101/46 101/packed Weight ENTYRONNENTAL STANDARDS Energy Star qualified	<u> </u>		
SmartPINTM joint Power Plug			
Power Plug PROGRAMS Number of programs Sinse & Hold Quick wash (1310F rinse temp) China/crystal (1490F rinse temp) Pots and pans (1580F rinse temp) Pots and pans plus (1670F rinse temp) Pots and pans plus (1670F rinse tem			✓
PROGRAMS Number of programs Rinse & Hold Quick wash (131°F rinse temp) Regular wash (142°F-145°F rinse temp) Pots and pans (158°F rinse temp) Pots and pans plus (167°F rinse temp) Pots and pans plus (167°F rinse temp) Auto program (131°F - 149°F rinse temp) Program sequence Rinse aid indicator Rinse aid indicator Rinse aid indicator display RACK SYSTEM smartFOLD lower rack folding tines Lower rack embossed stainless handle Cuttery basket Upper rack (inset shelves) smartFOLD, upper rack folding tines FlexiRack, adjustable upper rack FlexiRack, adjustable upper rack PlexiRack, adjustable upper rack Rinse aid indicator Rinse aid indicator Rinse aid indicator Rinse aid indicator Rinse aid indicator display ACK SYSTEM SmartFOLD, lower rack folding tines FlexiRack, adjustable shandle ACUTERY basket Upper rack (inset shelves) A smartFOLD, upper rack folding tines FlexiRack, adjustable upper rack Loaded FlexiDrawer, removable 3rd rack - Nylon coated racks AUDIMENSIONS Packed (HxWxD) In 35 x 25 3/16 x 26 Cm 88,9 x 64.4 x 66.1 Packed Weight Uppacked Weight (Ib/kg) 101/46 Unpacked Weight Unpacked Weight Unpacked Weight Unpacked Weight Unpacked Weight FNURIONNENTAL STANDARDS Energy Star qualified			-
Number of programs Rinse & Hold Quick wash (131°F rinse temp) China/crystal (149°F rinse temp) Pots and pans (158°F rinse temp) Pots and pans plus (167°F rinse temp) Auto program (131°F - 149°F rinse temp) Pots and pans plus (167°F rinse temp) Auto program (131°F - 149°F rinse temp) Program sequence Rinse aid indicator Rinse aid indicator display RACK SYSTEM smartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Upper rack (inset shelves) smartFOLD, upper rack folding tines ✓ FlexiRack, adjustable upper rack FlexiDrawer, removable 3rd rack ¬ Nylon coated racks ✓ DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 m 88,9 x 64.4 x 66.1 Packed Weight Unpacked Weight (lb/kg) Unpacked Weight Unpacked Weight ENVIRONMENTAL STANDARDS Energy Star qualified			
Rinse & Hold Quick wash (131ºF rinse temp) China/crystal (149ºF rinse temp) Regular wash (142ºF-145ºF rinse temp) Pots and pans (158ºF rinse temp) Pots and pans plus (167ºF rinse temp) Auto program (131ºF - 149ºF rinse temp) DISPLAY Program sequence Rinse aid indicator Rinse aid indicator display Salt indicator display Salt indicator display WRACK SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Upper rack (inset shelves) SmartFOLD, upper rack folding tines FlexiRack, adjustable upper rack FlexiRack, adjustable upper rack FlexiDrawer, removable 3rd rack Nylon coated racks DIMENSIONS Packed (HxWxD) In 35 x 25 3/16 x 26 Cm 88,9 x 64.4 x 66.1 Packed Weight Unpacked Weight (lb/kg) Unpacked Weight ENVIRONMENTAL STANDARDS Energy Star qualified			
Quick wash (1310F rinse temp) China/crystal (1490F rinse temp) Pots and pans (1420F-1450F rinse temp) Pots and pans [1580F rinse temp) Pots and pans plus (1670F rinse temp) Auto program (1310F - 1490F rinse temp) - Pots and pans plus (1670F	. 0		
China/crystal (149°F rinse temp) Regular wash (142°F-145°F rinse temp) Pots and pans (158°F rinse temp) Auto program (131°F - 149°F rinse temp) Program sequence Program sequence Rinse aid indicator Rinse aid indicator display RACK SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Upper rack (inset shelves) SmartFOLD, upper rack folding tines FlexiRack, adjustable upper rack FlexiRack, adjustable upper rack DIMIENSIONS Packed (HxWxD) In 35 x 25 3/16 x 26 Cm 88,9 x 64.4 x 66.1 Packed Weight Uppacked Weight			· · · · · · · · · · · · · · · · · · ·
Regular wash (142°F-145°F rinse temp) Pots and pans (158°F rinse temp) Pots and pans plus (167°F rinse temp) Auto program (131°F - 149°F rinse temp) Poss and pans plus (167°F rinse temp) Poss and pans plus (1			-
Pots and pans (158°F rinse temp) Pots and pans plus (167°F rinse temp) Auto program (131°F - 149°F rinse temp) Program sequence Rinse aid indicator Rinse aid indicator display RACK SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle Cuttery basket Upper rack (inset shelves) SmartFOLD, upper rack folding tines FlexiRack, adjustable upper rack FlexiRack, adjustable upper rack Packed (HxWxD) In 35 x 25 3/16 x 26 Cm 88,9 x 64.4 x 66.1 Packed Weight Unpacked Weight Unpacked Weight ENVIRONMENTAL STANDARDS Energy Star qualified			-
Pots and pans plus (167°F rinse temp) Auto program (131°F - 149°F rinse temp) DISPLAY Program sequence Rinse aid indicator Rinse aid indicator display Salt indicator display RACK SYSTEM smartFOLD lower rack folding tines Lower rack embossed stainless handle ∠ Cuttery basket Upper rack (inset shelves) smartFOLD, upper rack folding tines √ FlexiRack, adjustable upper rack FlexiRack, adjustable upper rack PlexiRack, adjustable upper rack PlexiRack, adjustable upper rack I Loaded FlexiDrawer, removable 3rd rack ¬ Nylon coated racks ✓ DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight Uppacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight Uppacked Weight V			-
Auto program (131°F - 149°F rinse temp) DISPLAY Program sequence Rinse aid indicator Rinse aid indicator display Salt indicator display FACK SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Upper rack (inset shelves) SmartFOLD, upper rack folding tines FlexiRack, adjustable upper rack FlexiRack, adjustable upper rack FlexiDrawer, removable 3rd rack Nylon coated racks DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight Unpacked Weight			
DISPLAY Program sequence Rinse aid indicator Rinse aid indicator display Salt indicator display Salt indicator display FACK SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Sliding Upper rack (inset shelves) SmartFOLD, upper rack folding tines V FlexiRack, adjustable upper rack FlexiRack, adjustable upper rack Nylon coated racks DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (Ib/kg) Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 Cm 86 x 59.8 x 54.8 Unpacked Weight Unpacked Weight Unpacked Weight Unpacked Weight Unpacked Weight V ENVIRONMENTAL STANDARDS Energy Star qualified			-
Program sequence			
Rinse aid indicator Rinse aid indicator display Salt indicator display RACK SYSTEM SmartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Sliding Upper rack (inset shelves) 4 smartFOLD, upper rack folding tines - V FlexiRack, adjustable upper rack Loaded FlexiDrawer, removable 3rd rack - Nylon coated racks DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) ENVIRONMENTAL STANDARDS Energy Star qualified			✓ / LCD Display
Salt indicator display RACK SYSTEM smartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Upper rack (inset shelves) smartFOLD, upper rack folding tines FlexiRack, adjustable upper rack FlexiRack, adjustable upper rack Loaded FlexiDrawer, removable 3rd rack Nylon coated racks DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight V	-		
RACK SYSTEM smartFOLD lower rack folding tines Lower rack embossed stainless handle Cutlery basket Sliding Upper rack (inset shelves) smartFOLD, upper rack folding tines FlexiRack, adjustable upper rack FlexiRack, adjustable upper rack Loaded FlexiDrawer, removable 3rd rack Nylon coated racks - Nylon coated racks DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (lib/kg) Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight Unpacked Weight Unpacked Weight Unpacked Weight Unpacked Weight Senergy Star qualified	Rinse aid indicator display		/
smartFOLD lower rack folding tines ✓ Lower rack embossed stainless handle ✓ Cuttery basket Sliding Upper rack (inset shelves) 4 smartFOLD, upper rack folding tines ✓ FlexiRack, adjustable upper rack Loaded FlexiDrawer, removable 3rd rack - Nylon coated racks ✓ DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS Energy Star qualified ✓	Salt indicator display		✓
Lower rack embossed stainless handle ✓ Cutlery basket Sliding Upper rack (inset shelves) 4 smartFoLD, upper rack folding tines ✓ FlexiRack, adjustable upper rack Loaded FlexiBrawer, removable 3rd rack - Nylon coated racks ✓ DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS Energy Star qualified ✓	RACK SYSTEM		
Cutlery basket Sliding Upper rack (inset shelves) 4 smartFOLD, upper rack folding tines ✓ FlexiRack, adjustable upper rack Loaded FlexiDrawer, removable 3rd rack - Nylon coated racks ✓ DIMENSIONS S Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS Energy Star qualified ✓	smartFOLD lower rack folding tines		✓
Upper rack (inset shelves) 4 smartFOLD, upper rack folding tines ✓ FlexiRack, adjustable upper rack Loaded FlexiDrawer, removable 3rd rack - Nylon coated racks ✓ DIMENSIONS S Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRON/MENTAL STANDARDS Energy Star qualified ✓			✓
smartFOLD, upper rack folding tines ✓ FlexiRack, adjustable upper rack Loaded FlexiDrawer, removable 3rd rack - Nylon coated racks ✓ DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS Energy Star qualified ✓			
FlexiRack, adjustable upper rack FlexiDrawer, removable 3rd rack Nylon coated racks			· · · · · · · · · · · · · · · · · · ·
FlexiDrawer, removable 3rd rack Nylon coated racks DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight			· · · · · · · · · · · · · · · · · · ·
Nylon coated racks DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS Energy Star qualified ✓			Loaded
DIMENSIONS Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (Ib/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (Ib/kg) 94/43 ENVIRONMENTAL STANDARDS Energy Star qualified ✓	· · · · · · · · · · · · · · · · · · ·		-
Packed (HxWxD) in 35 x 25 3/16 x 26 cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS Energy Star qualified ✓	3		/
cm 88,9 x 64.4 x 66.1 Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS Energy Star qualified ✓			05.05.040.00
Packed Weight (lb/kg) 101/46 Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS Energy Star qualified ✓	Packed (HXWXD)		
Unpacked (HxWxD) in 33 7/8 x 23 9/16 x 21 5/8 cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS ✓	Dealerd Weight		
cm 86 x 59.8 x 54.8 Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS Freegy Star qualified ✓			
Unpacked Weight (lb/kg) 94/43 ENVIRONMENTAL STANDARDS Energy Star qualified ✓	опраскей (пхихи)		
ENVIRONMENTAL STANDARDS Energy Star qualified ✓	Uppacked Weight		
Energy Star qualified ✓		(ID/Kÿ)	94/43
LIIGIUV CONSUMBLUM I ZNII ZNII ZNII			
Water consumption, gal/cycle 3.50			
RoHS* compliant ✓			·

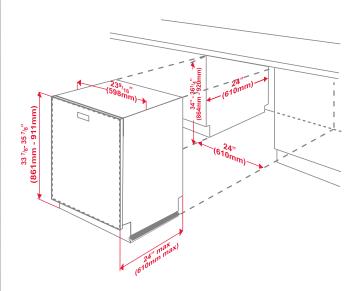

^{*} Lead-free