

SPECIFICATIONS

SHERIDAN™ TWO HANDLE WIDESPREAD LAVATORY FAUCET

Model

D304155

Description

- · Ceramic disc valves
- 3 3/4" high spout, 5 1/4" spout length
- With 50/50 pop-up drain assembly
- 3 hole mount
- 1.2gpm (4.5L/min) maximum flow rate @60 psi
- Meets CEC Requirement

Standards



NSF/ANSI 372

• NSF/ANSI 372



• ASME A112.18.1M/A112.18.1



 ADA Accessibility Guidelines for Buildings and Facilities -309.4 Operation for Operable Parts

·WaterSense Pending

Flow Rate 2.5 1.2 20 40 60 PSI





Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.



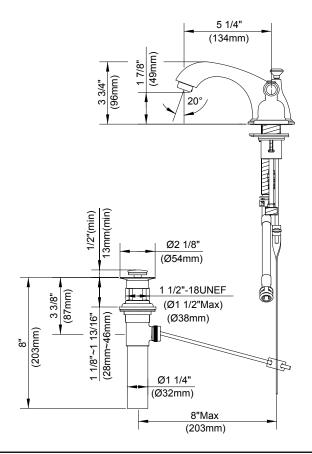

| | Su | bmittal | l Infor | mation: |
|--|----|---------|---------|---------|
|--|----|---------|---------|---------|

Contractor: _

Job Name: _____

Location: ______
Contact #:_____