



Dekton® surface basic requirements

Dekton® requirements


- Valid Thicknesses: 20 mm and 12 mm.
- All active Dekton® colours in the current ColorList can be used, except for those in the XGloss series (Halo kC and Dunna kC).
- Valid for both kitchen countertop or kitchen island applications.
- Reinforcement mesh underneath is not allowed with this cooking system.

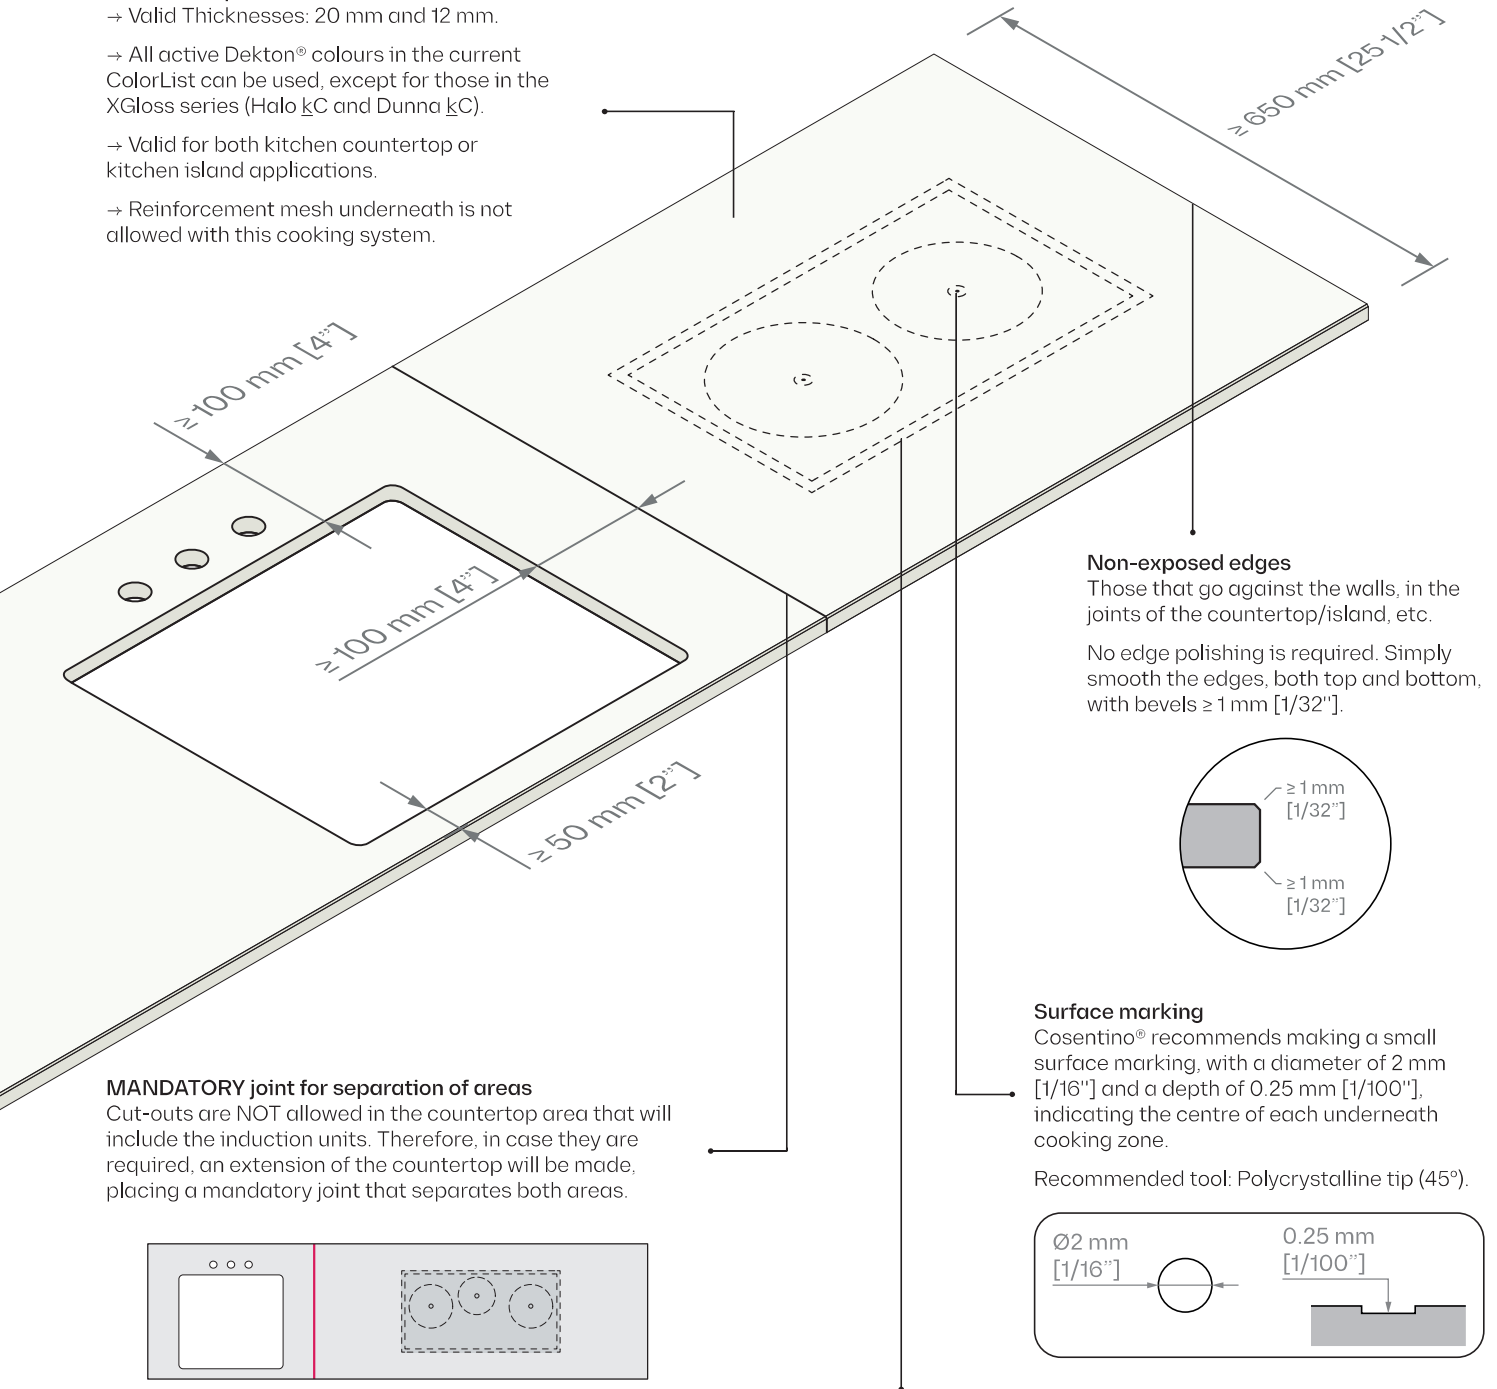

MANDATORY joint for separation of areas
Cut-outs are NOT allowed in the countertop area that will include the induction units. Therefore, in case they are required, an extension of the countertop will be made, placing a mandatory joint that separates both areas.

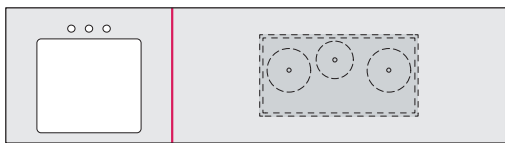



Non-exposed edges
Those that go against the walls, in the joints of the countertop/island, etc.
No edge polishing is required. Simply smooth the edges, both top and bottom, with bevels ≥ 1 mm [1/32"].



Surface marking
Cosentino® recommends making a small surface marking, with a diameter of 2 mm [1/16"] and a depth of 0.25 mm [1/100"], indicating the centre of each underneath cooking zone.

Recommended tool: Polycrystalline tip (45°).

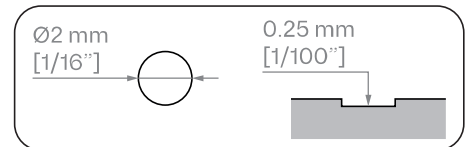

 → Please refer to the Dekton® Countertops Design & Installation Manual for additional information on tips for this application: recommended edges, overhangs, cut-outs fabrication, supports, reinforcements, etc.

Invisacook® induction units available

There are three validated models of Invisacook® invisible induction system for use with Dekton®, with direct installation under the countertop. Find additional information on this induction system at www.invisacook.com.

Invisacook® induction system basic concepts

Cookware requirements
→ Valid for induction cooking systems.
→ Valid range of dimensions is from 16 cm [6"] to 22 cm [9"].

MANDATORY use of Invisamat
The use of this silicone raising mat is **MANDATORY** when cooking.
It will be provided by the induction system manufacturer.
The invisacook ware with raisers **are not allowed**.

Control pad
Every induction unit will include a control pad, depending on the type chosen.
As no cut-outs are allowed in the countertop area where the induction unit is placed, the control pads will always be placed frontally (on the cabinet front) or horizontally (inside a cabinet drawer).
Please, refer to the manufacturer's documentation for further details on this device.

Invisacook® induction unit
Depending on the requirements, there are three validated models of Invisacook® invisible induction system for use with Dekton®:

- 1 Burner unit
 - 294 mm [12"]
 - 375 mm [15"]
- 2 Burners unit
 - 510 mm [20"]
 - 305 mm [12"]
- 3 Burners unit
 - 760 mm [30"]
 - 390 mm [15 1/3"]

Indoor use only
The invisible induction system is only validated for use on Dekton® surfaces installed indoors.
Under no circumstances should this system be installed on outdoor countertops/islands.

→ Indoor use. → Outdoor use.


Design, installation & use requirements

Minimum distances to edges


The minimum distance (D) set will be a minimum in Dekton 20 mm of 250 mm [10"], and for Dekton 12 mm of 300 mm [11.8"], from the centre axis of each induction burner to any of the edges/joints (front, rear, and sides).

This way, and depending on the type of induction unit chosen, we have:


→ 1 Burner unit



→ 2 Burners unit

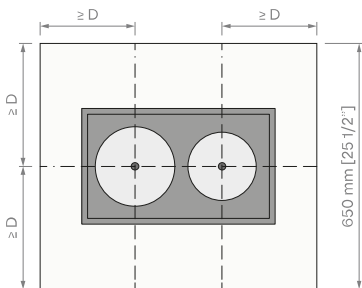


→ 3 Burners unit

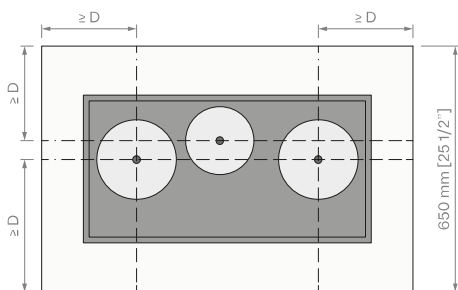

Panoramic configuration & distances


The minimum distance between units, for any combination (1 + 1, 1 + 2, 2 + 2, etc.), will be determined by the space occupied by the installation elements (clips) of the system. Please refer to the manufacturer's documentation for further details.

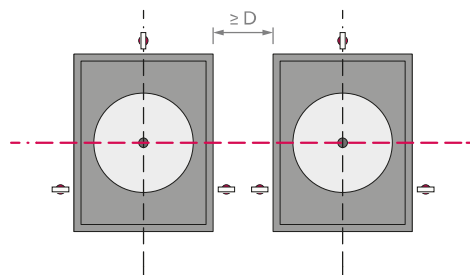


Installation process

Install the units by following the manufacturer's instructions. The only valid installation procedure is by using its Epoxy adhesive + Sink Clips + Z Clips.

Other types of installation (e.g. as Drill + Insert + Screw) are NOT allowed under any circumstances.



→ Epoxy + Sink Clip + Z Clip.



→ Drill + Insert + Screw.



- MANDATORY use of Invisamat (silicone rising mat).
- 4 and 5 burners are not allowed.
- Never heat empty cookware, as it can reach very high temperatures and damage both Invisamat and the Dekton® surface.
- Follow the appliance manufacturer's recommendations for proper ventilation under the countertop.
- Find further information on this induction system at www.invisacook.com.
- Cosentino® Warranty does not cover possible damages caused by improper use.