


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE JDRP430H | 36" DUAL-FUEL RANGE JDRP436H |
|--------------------------------------|---------------------------------|---------------------------------|
| Overall Width (A) | 29-7/8" (75.9 cm) | 35-7/8" (91.1 cm) |
| Bull nose Height (B) | 2-1/8" (5.4 cm) | 2-1/8" (5.4 cm) |
| Control Panel Height (C) | 7-1/2" (19.1 cm) | 7-1/2" (19.1 cm) |
| Door Height (D) | 20-11/16" (52.6 cm) | 20-11/16" (52.6 cm) |
| Door Bottom to Handle Top: RISE™ (E) | 20" (50.8 cm) | 20" (50.8 cm) |
| Door Bottom to Handle Top: NOIR™ (E) | 20-5/8" (52.4 cm) | 20-5/8" (52.4 cm) |
| Toe-Kick Height (F) | 6-11/16" (17 cm) | 6-11/16" (17 cm) |

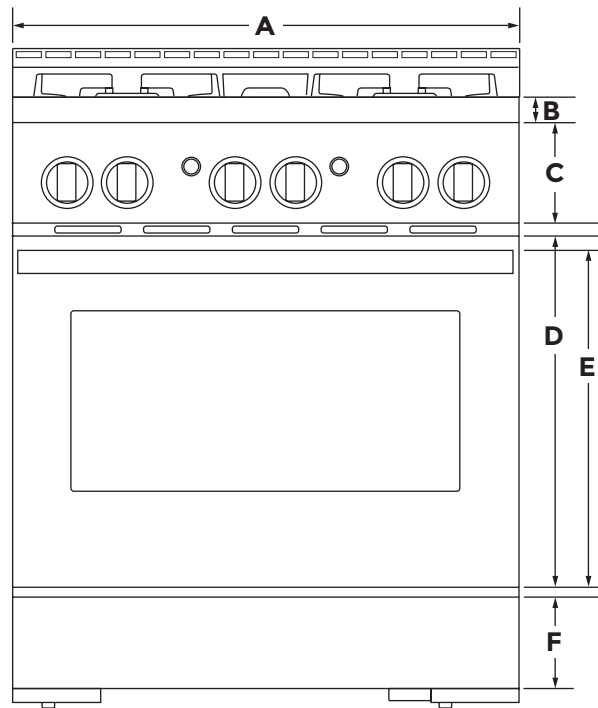

FRONT VIEW




IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE JDRP430H | 36" DUAL-FUEL RANGE JDRP436H |
|---------------------------------------|---------------------------------|---------------------------------|
| Depth with Control Panel Overhang (G) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) |
| Depth with Handle: RISE™ (H) | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) |
| Depth with Handle: NOIR™ (H) | 29-5/16" (74.5 cm) | 29-5/16" (74.5 cm) |
| Depth with Door Fully Open (I) | 46-1/2" (118.1 cm) | 46-1/2" (118.1 cm) |

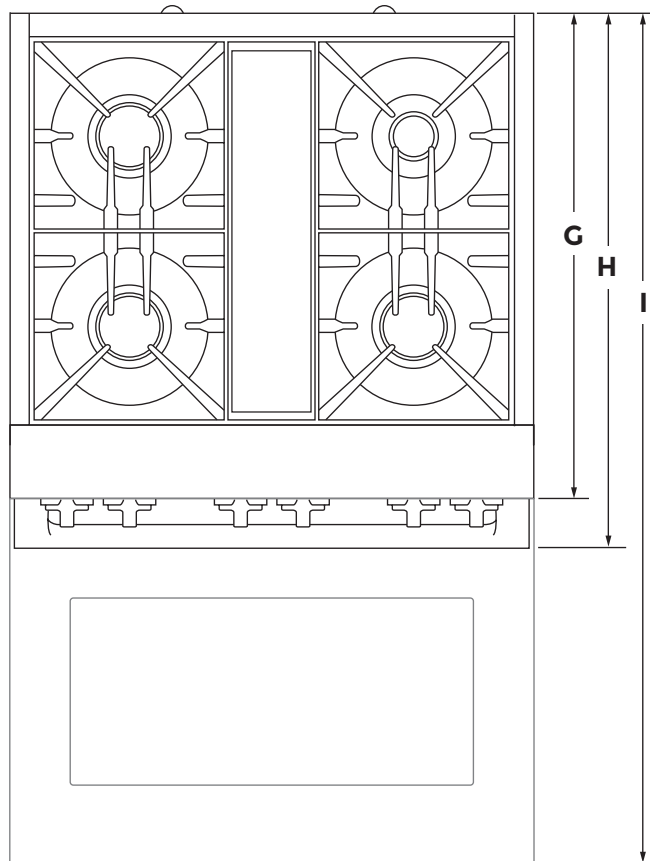


TOP VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 30" DUAL-FUEL RANGE JDRP430H | 36" DUAL-FUEL RANGE JDRP436H | 48" DUAL-FUEL RANGE JDRP548H |
|--|---------------------------------|---------------------------------|---------------------------------|
| Grates Top Height (A) | 37-5/16" (94.8 cm) | 37-5/16" (94.8 cm) | 37-5/16" (94.8 cm) |
| Cooking Surface Top Height (B) | 36" (91.4 cm) | 36" (91.4 cm) | 36" (91.4 cm) |
| Door Top Height (C) | 27-13/16" (70.6 cm) | 27-13/16" (70.6 cm) | 27-13/16" (70.6 cm) |
| Handle Top Height: RISE™ (D) | 27" (68.6 cm) | 27" (68.6 cm) | 27" (68.6 cm) |
| Handle Top Height: NOIR™ (D) | 27-5/8" (70.2 cm) | 27-5/8" (70.2 cm) | 27-5/8" (70.2 cm) |
| Toe-Kick Height (E) | 6-11/16" (17 cm) | 6-11/16" (17 cm) | 6-11/16" (17 cm) |
| | OPTIONAL ACCESSORIES | | |
| Height to Top of 9" Stainless Steel Backsplash (F) | 45" (114.3) min. | 45" (114.3) min. | 45" (114.3) min. |

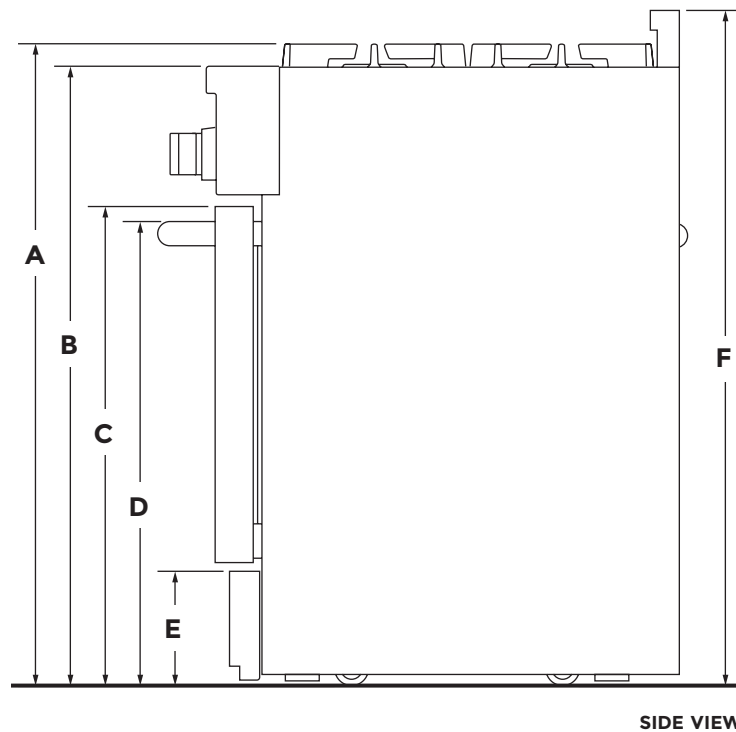


IMPORTANT: Minimum height dimensions are at the lowest point of the height adjustment range. When the leveling legs are fully extended, all heights have 1-3/4" (4.4 cm) of added height.

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES PRODUCT

| | 30" DUAL-FUEL RANGE JDRP430H | 36" DUAL-FUEL RANGE JDRP436H | 48" DUAL-FUEL RANGE JDRP548H |
|---------------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Depth with Door Fully Open (G) | 46-1/2" (118.1 cm) | 46-1/2" (118.1 cm) | 46-1/2" (118.1 cm) |
| Depth with RISE™ Handle (H) | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) | 29-13/16" (75.7 cm) |
| Depth with NOIR™ Handle (H) | 29-5/16" (74.5 cm) | 29-5/16" (74.5 cm) | 29-5/16" (74.5 cm) |
| Depth with Control Panel Overhang (I) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) | 27-11/16" (70.3 cm) |
| Depth to Toe-Kick with Door (J) | 26-3/8" (67 cm) | 26-3/8" (67 cm) | 26-3/8" (67 cm) |
| Depth with RISE™ Door (K) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) |
| Depth with NOIR™ Door (K) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) | 27-1/4" (69.2 cm) |

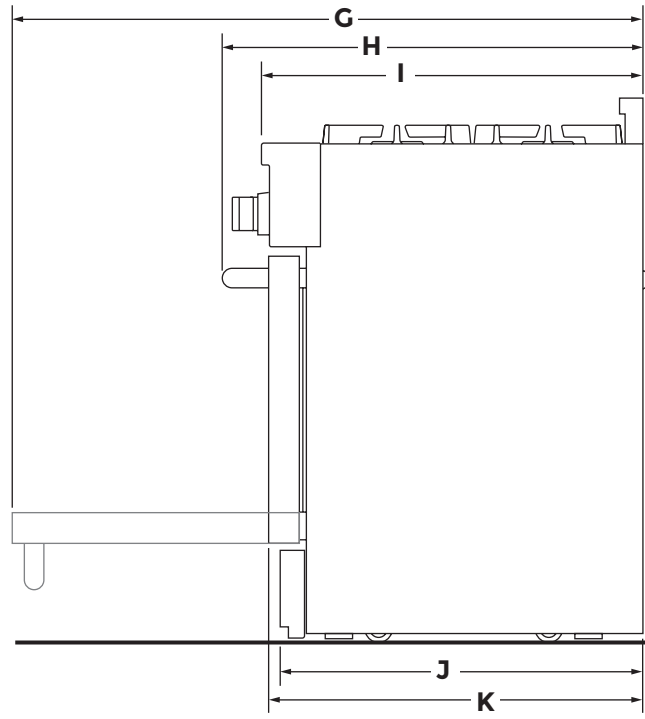


SIDE VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 48" DUAL-FUEL RANGE JDRP548H |
|---|---------------------------------|
| Overall Width (A) | 47-7/8" (121.6 cm) |
| Bull nose Height (B) | 2-1/8" (5.4 cm) |
| Control Panel Height (C) | 7-1/2" (19.1 cm) |
| Door Heights (D) | 20-11/16" (52.5 cm) |
| Door Bo ttoms to Handle Tops: RISE™ (E) | 20" (50.8 cm) |
| Door Bo ttoms to Handle Tops: NOIR™ (E) | 20-5/8" (52.4 cm) |
| Secondary Oven Door Width (F) | 17-3/4" (45.1 cm) |
| Main O ven Door Width (G) | 29-5/8" (75.2 cm) |
| Toe-Kick Height (H) | 6-11/16" (17 cm) |

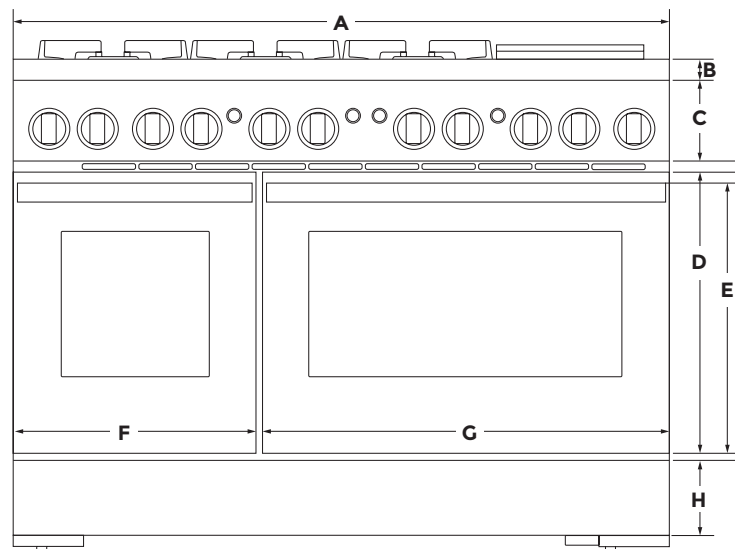


FRONT VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

PRODUCT

| | 48" DUAL-FUEL RANGE JDRP548H |
|---------------------------------------|--|
| Depth with Control Panel Overhang (I) | 27-11/16" (70.3 cm) |
| Depth with Handles: RISE™ (J) | 29-13/16" (75.7 cm) |
| Depth with Handles: NOIR™ (J) | 29-5/16" (74.5 cm) |
| Depth with Doors Fully Open (K) | 46-1/2" (118.1 cm) |

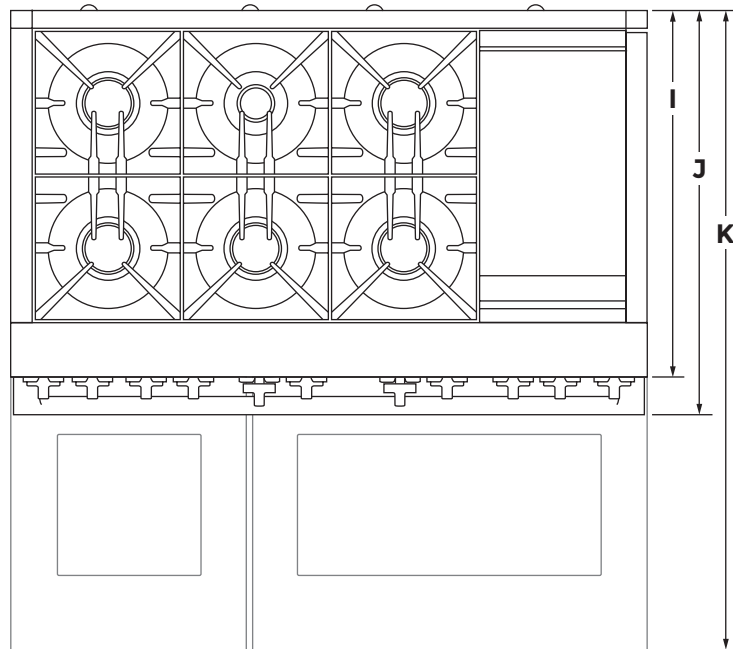

TOP VIEW


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

| | 30" DUAL-FUEL RANGE JDRP430H | 36" DUAL-FUEL RANGE JDRP436H | 48" DUAL-FUEL RANGE JDRP548H |
|--|---------------------------------|---------------------------------|---------------------------------|
| Combustible Area Above Cooking Surface Width (A) | 30" (76.2 cm) min. | 36" (91.4 cm) min. | 48" (121.9 cm) min. |
| Bottom of Cabinet Height Above Cooking Surface (B)* | 42" (106.7 cm) min. | 58" (147.3 cm) min. | 58" (147.3 cm) min. |
| Bottom of Cabinet Height Above Countertop (C) | 18" (38.1 cm) min. | 18" (45.7 cm) min. | 18" (45.7 cm) min. |
| Distance to Fixed Wall or Combustible Material (D) | 12" (30.5 cm) min. | 12" (30.5 cm) min. | 12" (30.5 cm) min. |
| Opening Width (E) | 30" (76.2 cm) min. | 36" (91.4 cm) min. | 48" (121.9 cm) min. |

*If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

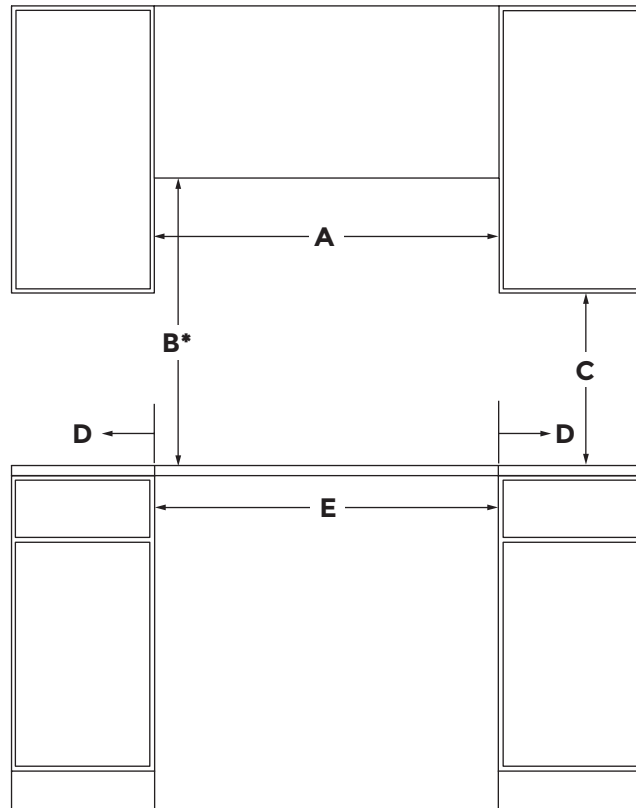

FRONT VIEW


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES

OPENING AND CLEARANCE

| | 30" DUAL-FUEL RANGE JDRP430H | 36" DUAL-FUEL RANGE JDRP436H | 48" DUAL-FUEL RANGE JDRP548H |
|-------------------------|---------------------------------|---------------------------------|---------------------------------|
| Upper Cabinet Depth (F) | 13" (33 cm) max. | 13" (33 cm) max. | 13" (33 cm) max. |
| Depth to Wall (G)* | 6" (15.2 cm) min. | 6" (15.2 cm) min. | 6" (15.2 cm) min. |

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 6" (15.2 cm) minimum clearance is required.

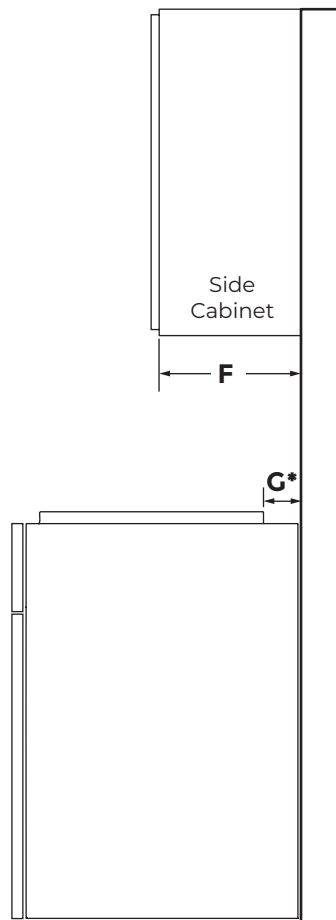

SIDE VIEW

DIMENSIONS

JENNAIR® DUAL-FUEL RANGES


ELECTRICAL REQUIREMENTS

| | 30" DUAL-FUEL RANGE JDRP430H | 36" DUAL-FUEL RANGE JDRP436H | 48" DUAL-FUEL RANGE JDRP548H |
|----------------------------|---------------------------------|---------------------------------|---------------------------------|
| Electrical Zone Width (A) | 22" (55.9 cm) | 28" (71.1 cm) | 40" (101.6 cm) |
| Electrical Zone Height (B) | 15" (38.1 cm) | 15" (38.1 cm) | 15" (38.1 cm) |
| Electrical Zone Depth (C) | 5" (12.7 cm) | 5" (12.7 cm) | 5" (12.7 cm) |


ELECTRIC REQUIREMENTS CHECKLIST

- A 240 volt, 60 Hz, fused, grounded circuit is required.
- For 30" and 36" ranges, use a 40-amp circuit.
- For 48" ranges, use a 50-amp circuit.
- A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL ZONE

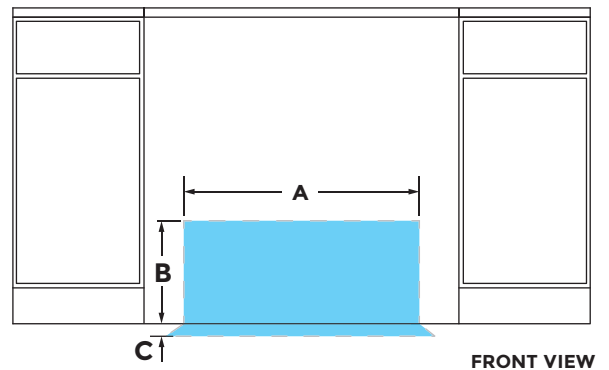

WIDTH TO ELECTRICAL CONDUIT

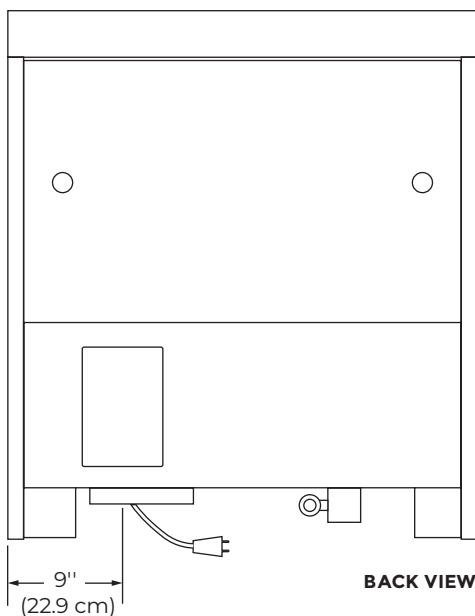

? IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY, CALL A LICENSED, QUALIFIED ELECTRICIAN.


DIMENSIONS

JENNAIR® DUAL-FUEL RANGES


GAS REQUIREMENTS

| | 30" CONNECTED DUAL-FUEL RANGE JDRP430H | 36" CONNECTED DUAL-FUEL RANGE JDRP436H | 48" DUAL-FUEL RANGE JDRP548H |
|--|--|--|------------------------------------|
| Gas Opening Width (A) | 6" (15.2 cm) | 14" (35.6 cm) | 24" (61 cm) |
| Gas Opening Height (B) | 3" (7.6 cm) | 3" (7.6 cm) | 3" (7.6 cm) |
| Gas Opening Depth (C) | 5" (12.7 cm) | 5" (12.7 cm) | 5" (12.7 cm) |
| Distance from Side Cabinet to Gas Opening (D) | 6" (15.2 cm) | 6" (15.2 cm) | 6" (15.2 cm) |
| Width to Gas Inlet (E) | 12-3/4" (32.4 cm) | 12-3/4" (32.4 cm) | 12-3/4" (32.4 cm) |

RECOMMENDED GAS ZONE

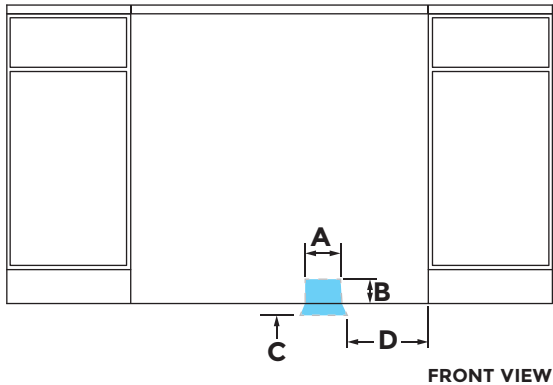

WIDTH TO GAS INLET

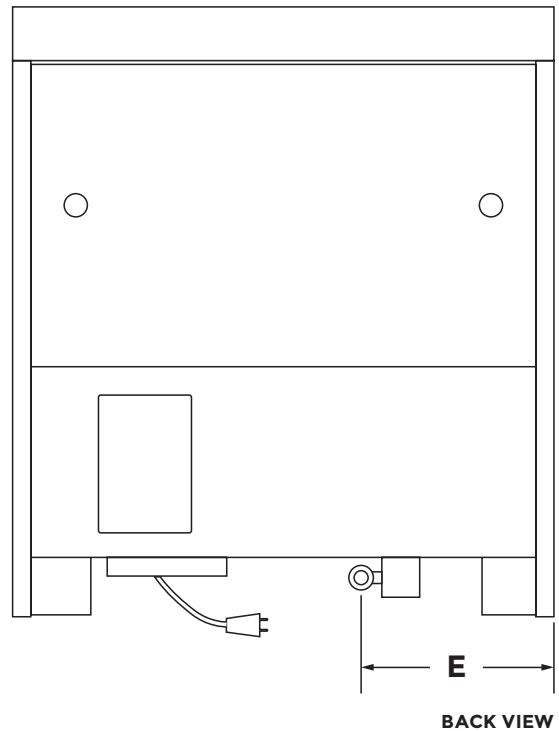

IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY,
CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.