



30" Electric Touch-Control Drop-In Cooktop Specifications

- Product Weight – 42 Lbs.
- Connected Load (kW Rating) – 240/208 Volts = 7.8 kW/5.9 kW
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, fused on both sides of line with ground.
- Amps @ 240/208 Volts = 33.0/29.0 Amps
- Recommended Circuit Breaker – 40 Amps
- Always consult local and/or national electric codes.
- Allow 2" space below armoured cable opening to clear electrical cable and allow space for installation of junction box on wall at back of cooktop.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- The absolute minimum horizontal distance between overhead cabinets installed to either side of the appliance must be no less than the maximum width of the appliance.
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- Allow 1-1/2" minimum clearance between rear edge of cutout and nearest combustible surface above countertop.
- Allow 7-1/2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- It is recommended that drawers not be used beneath cooktop.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.

NOTE: Refer to Product Installation Guide for detailed instructions on the web at electroluxusa.com.

Expandable, Flexible Element Configuration

Four Concentric rings in double and triple elements expand to fit a variety of pan sizes for added cooking flexibility.

Ceramic Smoothtop Glass

Glass cooktop is flat, smooth and easy to clean and maintain.

Electronic Touch-Controls

The smooth cooktop surface is undisturbed with knobs for a look that is sleek and flush with your countertop.

Hot Surface Indicator

For added safety, when an element is still hot, a blue LED indicator will stay on until surface cools.

30" ELECTRIC TOUCH-CONTROL DROP-IN COOKTOP

| | |
|---------------|---------------------|
| Configuration | 4 Electric Elements |
|---------------|---------------------|

FEATURES

| | |
|--|-----|
| Black Ceramic Glass Surface | Yes |
| 6" Element – 1200W | 2 |
| 5" to 7" to 9" Element – 1000W/1800W/2700W | 1 |
| 9" to 12" Element – 1700W/2700W | 1 |
| Precision Touch Controls | Yes |


ACCESSORIES

| | |
|---------|----------|
| Griddle | Optional |
|---------|----------|


SPECIFICATIONS

| | |
|---|------------------------------|
| Cutout Dimensions – | |
| Height | 5" |
| Width | 29-7/8" min. 30" max. |
| Depth | 20-1/8" min. 20-1/4" max. |
| Power Cable Location | Middle |
| Amps @ 240/208 Volts | 33.0/29.0 Amps |
| Connected Load Rating - 240/208 Volts | 7.8kW/5.9 kW |
| Electrical – Single phase 3- or 4-wire cable, 120/240 V or 120/208 V, 60 Hz, fused on both sides of line with ground. | Required |
| Armored Electrical Cable | Included |
| Product Weight | 42 Lbs. |
| Shipping Weight | 48 Lbs. |
| UPC (0-57112-) | 09485-4 |

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxusa.com.



Griddle

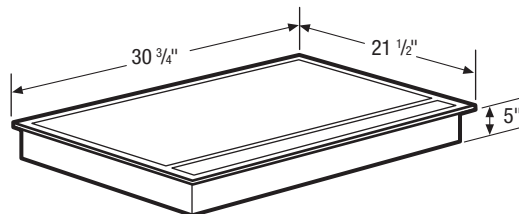

USA • 250 Bobby Jones Expressway • Augusta, GA 30907
1-877-4electrolux (1-877-435-3287) • electroluxusa.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4
1-800-668-4606 • electroluxca.com

E30EC70FSS 05/06

High standards of quality at Electrolux Major Appliances mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.