

BUILT-IN ALL FREEZER

Featuring IQ-Touch™ Electronic Controls



SIGNATURE FEATURES



SURE-2-FIT® CAPACITY

Our most usable space inside gives you plenty of space to stock up so you'll always have food on hand for even an impromptu gathering.



LUXURY-GLIDE® FULL-WIDTH FREEZER DRAWERS

Drawers glide out smoothly and fully extend, giving you easy access to what's inside.



FULL-WIDTH GLASS SHELVES

25" Full-width glass shelves provide enough space for large platters and are designed to keep spills contained, making them easy to clean.



SOFT FREEZE™ BIN

Perfect storage for things like ice cream or anything you want to keep frozen, but still soft for serving.

El32AF80QS

PRODUCT DIMENSIONS

Height (Cabinet Incl. Hinge) 70-5/8" Width 32" Depth (Incl. Door) 26-1/2"

MORE EASY-TO-USE FEATURES

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes a 3-year coverage on parts and one year on labor without charge.1

IQ-TOUCH™ CONTROLS

For those who like to have their options always visible on the IQ-Touch™ control panel.

BUILT-IN TRIM KIT

Optional trim kit(s) are available in stainless steel for built-in refrigerator, built-in freezer or side-by-side configuration.

AUTOMATIC ICE MAKER

Ensures you'll always have extra ice on hand.

ENHANCED LIGHTING

Bright lighting makes finding food easy.

ALARM SYSTEM

Notifies you if there's been a power failure, if a door stays open longer than five minutes and if the interior temperature of the freezer rises above 23 degrees for more than 60 minutes.

PUREADVANTAGE® AIR FILTER

Keeps clean, filtered air circulated throughout to prevent odor transfer.

Available in:



Stainless (S)

OPTIONAL TRIM KITS

84" LOUVERED **TRIM KITS**

(ECP8436SS & ECP8472SS) Designed as a replacement option for the Sub-Zero® brand 650 Series models and for new-build installation.

72" COLLAR **TRIM KITS**

(ECP7236SS & ECP7272SS) Designed as a replacement option for the Sub-Zero® brand 601 Series models and for new-build installation.

79" LOUVERED / 75" **COLLAR TRIM KITS²**


(TRIMKITSS1 & TRIMKITSS2) Designed as a replacement option for Electrolux ICON® brand models E32AR75FPS and E32AF75FPS and for new-build installation.

Eligibility based on product repistration with Electrolux North America within 60 days of purchase. Products must have been purchased on or after July 1, 2013. Coverage includes material parts or 3 years and labor for 1 year. 'Also are designed to fit either 75" or 75" opening height. For 79" cultud opening height, installation requires use of top lowered griller for 75" cultud opening height, installation requires use of top trim piece and shortening of both side trim pieces. Sub-Zero® is a registered trademark of Sub-Zero, Inc.

ELECTROLUXAPPLIANCES.COM




CAPACITIES	
Total Capacity	18.6 Cu. Ft.
Total Shelf Area	19.7 Sq. Ft.
EXTERIOR	
Hidden Hinge Door Design	Yes
Signature Soft-Arc Handle Design	Yes
Signature Suit-Art Handle Design	162
FEATURES	
IQ-Touch™ Electronic Controls	Yes
Temp Alarm System	Yes
Door Ajar Alarm	Yes
Power Failure Alarm	Yes
PureAdvantage® Air Filtration	Yes
Adjustable Full-Width Glass Shelves (Silver Trim)	2
Luxury-Glide® Full-Width Bottom Basket	1
Luxury-Glide® Full-Width Mid-Level Baskets	2
Soft Freeze™ Bin with Tall Bottle Retainer	1
Clear Half-Width Adjustable Door Bin	4
Full-Width Door Bin	1
Luxury-Design® LED Lighting	Yes
Automatic Ice Maker	Yes
Door Closer	Yes
Luxury-Quiet™ Design	Yes
Air Filter Indicator	Yes
Electronic Control Lock	Yes
ADDITIONAL FEATURES	
Sabbath Mode (Star-K® Certified)	Yes
ACCESSORIES	
B4" Louvered Trim Kits: Single – PN# ECP8436SS	Optional
Double - PN# ECP8472SS	Optional
72" Collar Trim Kits: Single – PN# ECP7236SS Double – PN# ECP7272SS	Optional Optional
79" Louvered/75" Collar Trim Kits1:	
Single – PN# TRIMKITSS1	Optional
Double - PN # TRIMKITSS2	Optional
SPECIFICATIONS	
Color –	
Stainless Steel	S
Power Supply Connection Location	Right Bottom Rear
Water Inlet Location	Left Bottom Rear
Voltage Rating	115V/60 Hz
Connected Load (kW Rating) @ 115 Volts [‡]	0.55
Minimum Circuit Required (Amps)	20
Shipping Weight (Approx.)	255 Lbs.
Kits are designed to fit either 79" or 75" opening helght. For 79" cutout openin requires use of top louvered grille; for 75" cutout opening helght, installation r trim piece and shortening of both side trim pieces.	ng height, installation equires use of top
FAn electrical supply with grounded three-prong receptacle is required. The por circuit must be installed in accordance with current edition of National Electric (NFPA 70) and local codes & ordinances. NOTE: Always consult local and national electric and plumbing codes. Refer to	wer supply cal Code

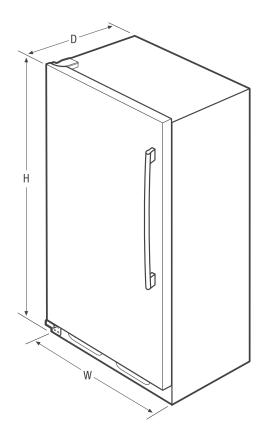

Height (Including Door)	71-3/8"
(Cabinet Including Hinge)	70-5/8"
Width	32"
Depth (Including Door)	26-1/2"
(With Door Open 90°)	57-3/8"





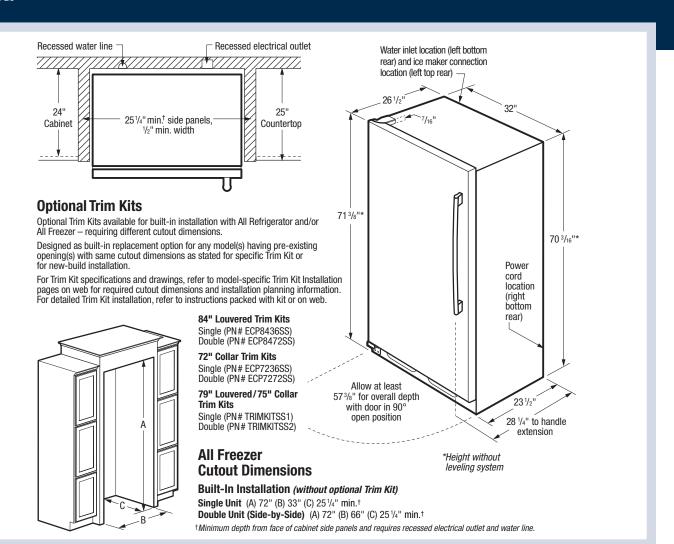

32" Built-In All Freezer Specifications

- Product Weight 245 Lbs.
- An electrical supply with grounded three-prong receptacle is required.
 The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating 115V/60 Hz
- Connected Load (kW Rating) @115 Volts = 0.55 kW
- Amps @ 115V = 5.0A
- Always consult local and national electric & plumbing codes.
- Water line for ice maker can enter opening through floor or rear wall. Copper tubing recommended between cold water line and water connection location.
 Water line tubing recommended is 48" minimum length by 1/4" diameter.
 Installation of easily accessible shutoff valve in water line required.
- Minimum 25-1/4" depth requires recessed electrical outlet and copper water line.
- To allow for ease of installation, tape excess power cord to back of unit.
 To allow for ease of moving out side-by-side units after installation,
 84" minimum length of coiled copper tubing recommended.
- When installing freezer adjacent to wall, cabinet or other appliance that
 extends beyond front edge of unit, 20" minimum clearance recommended
 to allow for optimum 140° door swing, providing complete drawer/crisper
 access and removal. (Absolute 4" minimum clearance will ONLY allow for
 90° door swing which will provide limited drawer/crisper access with
 restricted removal.)
- Freezer must be placed on level surface of hard material, same height as flooring. Surface must support approximately 800 lbs. when fully loaded. Unit equipped with 4-point leveling.

"Built-In Look" Specifications

- Minimum opening of 72" H x 33" W x 25-1/4" D required for single-unit "Built-In Look" installation; 66" W required for double-unit installation. (72" H to be measured from finished floor to underside of soffit or overhead cabinet.)
- Remove all wall/floor molding prior to built-in installation.

Optional Trim Kit Specifications

For planning information, refer to model-specific Trim Kit Installation pages on web.

- Optional Trim Kits available for built-in installation with All Refrigerator and/or All Freezer – requiring different cutout dimensions.
- Designed as built-in replacement option for any model(s) having pre-existing opening(s) with same cutout dimensions as stated for specific Trim Kit or for new-build installation.
- Remove all wall/floor molding prior to built-in installation.
- For detailed Trim Kit installation, refer to instructions packed with kit or on web.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

Optional Accessories

- 84" Louvered Trim Kits:
- Single (PN# ECP8436SS), Double (PN# ECP8472SS).
- 72" Collar Trim Kits:
- Single (PN# ECP7236SS), Double (PN# ECP7272SS).
- 79" Louvered/75" Collar Trim Kits: Single – (PN# TRIMKITSS1), Double – (PN# TRIMKITSS2).



Electrolux Major Appliances, N.A.