

# **Gourmet Undermount Sink** with Perfect Drain™ **Model ELUHAD Series - A.D.A. Compliant**

#### **GENERAL**

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel with **Perfect Drain**. Undermount.

Bowl Depths: See chart on next page.

Coved Corners: 1-3/4" (44mm) vertical and horizontal radius. Finish: Exposed surfaces are hand blended to a Lustrous Highlighted

Underside: Fully protected by Sound Guard® undercoating

to reduce condensation and dampen sound.

Perfect Drain: Seamlessly welded stainless steel collar eliminates the gap between a traditional drain and the sink for a sanitary and gap free installation.

Each sink shipped with two LKPD1 drain kits, or a garbage disposer

can be installed on either sink bowl for user convenience.

#### **Patent Pending**

#### **OTHER**

Drain opening: 3-3/8" (86mm)


NOTE: All Elkay undermount sinks are designed to affix to the underside of any solid surface countertop.


Waste Fitting complies with ASME A112.18.2/CAN/CSA-B125.2 Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.

THIS PRODUCT, AS CONSTRUCTED IS SUBJECT TO INTERPRETATION OF A.D.A. REQUIREMENTS. THE UNOBSTRUCTED KNEE SPACE REQUIRED TO SATISFY A.D.A. STANDARDS MAY NOT BE DESIRABLE.





Model ELUHAD312045RPD





NKS ARE

MADE IN THE USA

Elkay<sup>®</sup> Perfect Drain<sup>™</sup> sinks are designed and approved for compatible disposers manufactured by InSinkErator® utilizing the Quick Lock® mounting configuration. Use of non-approved disposers may void Elkay warranty.

InSinkErator, Quick Lock and the mounting collar configuration are trademarks of Emerson Electric Co.



#### SEE NEXT PAGE FOR PRODUCT DIMENSIONS.


In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not




### **SINK DIMENSIONS\***

|                 | Overall           |                   |                  | Inside Left Bowl  |               |                  | Inside Right Bowl |               |                  |                |                    |
|-----------------|-------------------|-------------------|------------------|-------------------|---------------|------------------|-------------------|---------------|------------------|----------------|--------------------|
| Model           | L                 | W                 | D                | L                 | W             | D                | L                 | W             | D                | Cutout in      | Minimum<br>Cabinet |
| Number          | Α                 | В                 | С                | D                 | E             | F                | G                 | Н             | F                | Countertop     | Size               |
| ELUHAD311845PD  | 30-3/4<br>(781mm) | 18-1/2<br>(470mm) | 5-7/8<br>(149mm) | 13-1/2<br>(343mm) | 16<br>(406mm) | 4-3/8<br>(111mm) | 13-1/2<br>(343mm) | 16<br>(406mm) | 4-3/8<br>(111mm) | See Template** | 36<br>(914mm)      |
| ELUHAD311850PD  | 30-3/4<br>(781mm) | 18-1/2<br>(470mm) | 6-3/8<br>(162mm) | 13-1/2<br>(343mm) | 16<br>(406mm) | 4-7/8<br>(124mm) | 13-1/2<br>(343mm) | 16<br>(406mm) | 4-7/8<br>(124mm) |                | 36<br>(914mm)      |
| ELUHAD311855PD  | 30-3/4<br>(781mm) | 18-1/2<br>(470mm) | 6-7/8<br>(175mm) | 13-1/2<br>(343mm) | 16<br>(406mm) | 5-3/8<br>(137mm) | 13-1/2<br>(343mm) | 16<br>(406mm) | 5-3/8<br>(137mm) |                | 36<br>(914mm)      |
| ELUHAD312045RPD | 31-1/4<br>(794mm) | 20-1/2<br>(521mm) | 5-7/8<br>(149mm) | 14<br>(356mm)     | 18<br>(457mm) | 4-3/8<br>(111mm) | 13-1/2<br>(343mm) | 16<br>(406mm) | 4-3/8<br>(111mm) |                | 36<br>(914mm)      |
| ELUHAD312050RPD | 31-1/4<br>(794mm) | 20-1/2<br>(521mm) | 6-3/8<br>(162mm) | 14<br>(356mm)     | 18<br>(457mm) | 4-7/8<br>(124mm) | 13-1/2<br>(343mm) | 16<br>(406mm) | 4-7/8<br>(124mm) |                | 36<br>(914mm)      |
| ELUHAD312055RPD | 31-1/4<br>(794mm) | 20-1/2<br>(521mm) | 6-7/8<br>(175mm) | 14<br>(356mm)     | 18<br>(457mm) | 5-3/8<br>(137mm) | 13-1/2<br>(343mm) | 16<br>(406mm) | 5-3/8<br>(137mm) |                | 36<br>(914mm)      |

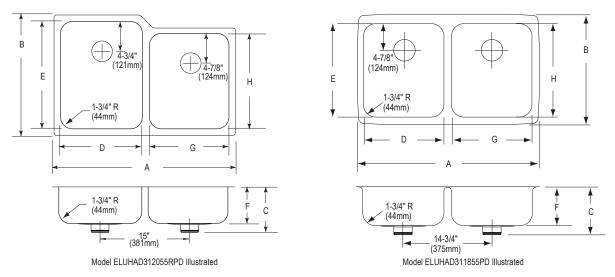

## **Installation Profile** 1/2"(13mm) Reveal

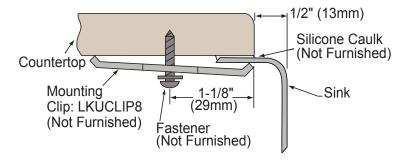

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not

<sup>\*</sup>Length is left to right. Width is front to back.
\*\*Template 74180168(ELUHAD3118) or 74180233(ELUHAD3120R) is packed with every sink.