

# ERD36, ERDE36, ERD48, & ERDE48




081705

## 36", 48" Wide, Epicure™ Ranges

1/2

## PLANNING GUIDE

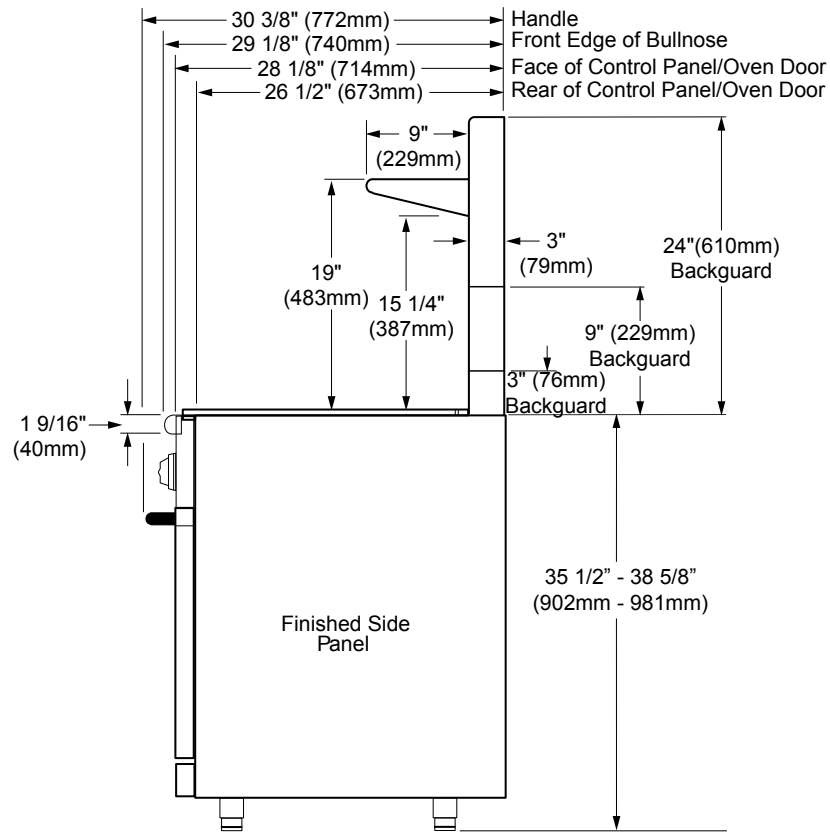


**SIDE VIEW**

Model No.	Dedicated Circuit Required	Total Connected Load	Approximate Shipping Weight
ERD36	240VAC, 4-wire, 60Hz, 30A (Breaker)	5.0kW (24A)	471 lbs.
ERDE36	240VAC, 4-wire, 60Hz, 40A (Breaker)	7.7kW (34A)	
ERD48	240VAC, 4-wire, 60Hz, 50A (Breaker)	10.0kW (46A)	613 lbs.
ERDE48		10.8kW (48A)	


**NOTES:**

1. Utilities may be located in the lower left corner of the adjacent right cabinet. (Recommended)
2. Contact your local building department to verify compliance with local code interpretation.
3. Backguards are ordered separately in heights of 3", 9" or 24".
4. 3/4" Regulator provided. 1/2" House Pipe okay.
5. Toe skirt sold separately (part# AETS36 or AETS48).

# ERD36, ERDE36, ERD48, & ERDE48

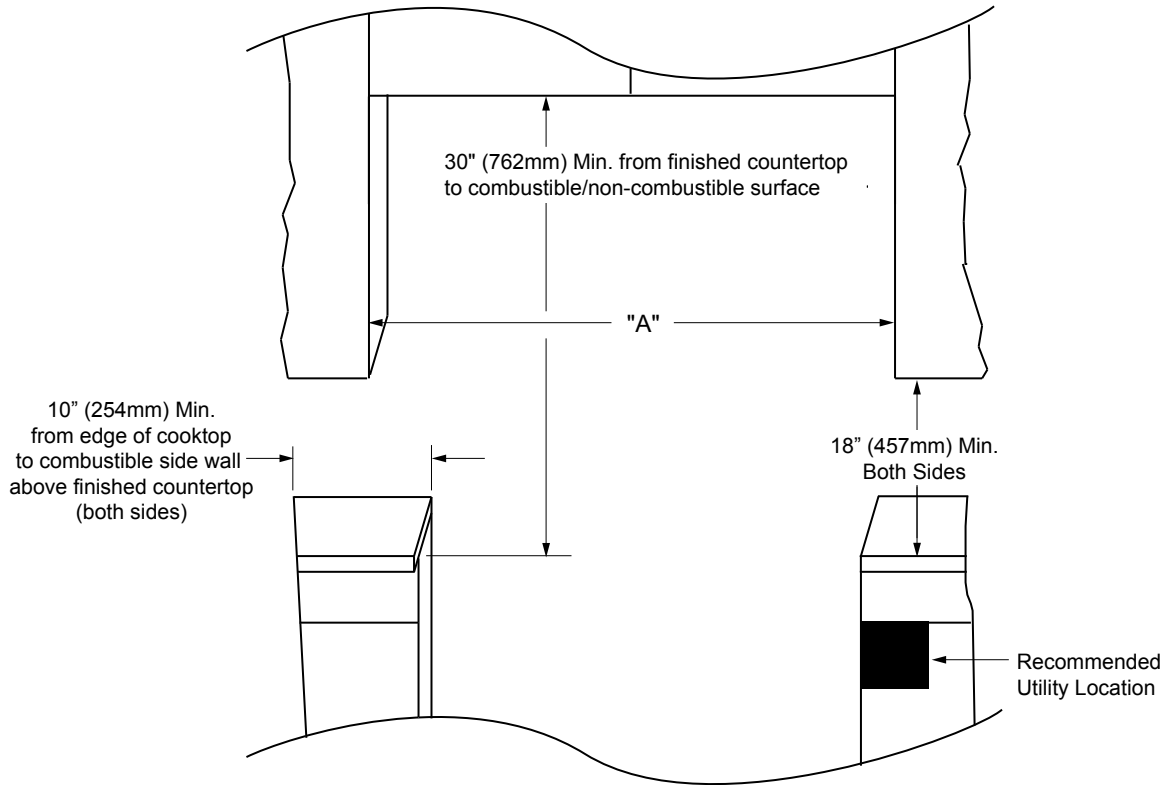

**UPPER CABINET DIMENSIONS**  
(Upper Cabinets 13" (330mm) Maximum Depth)

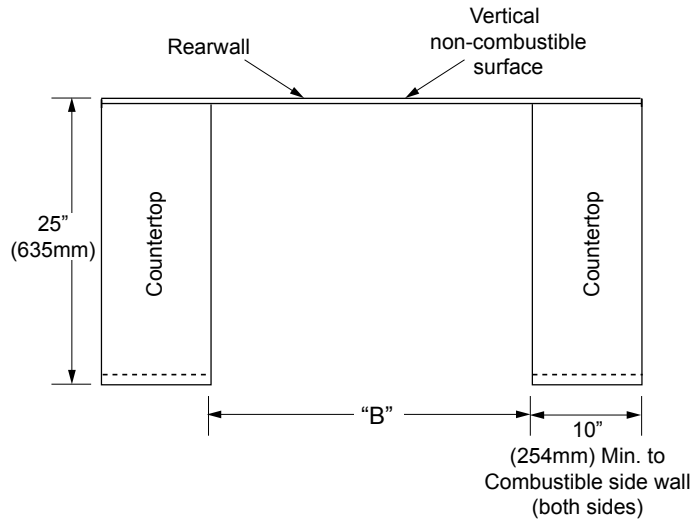

**COUNTERTOP CABINET DIMENSIONS**  
(Slide-In, Freestanding Installation)

Model No.	"A" Minimum Hood Width	"A" Recommended Hood Width	"B" Cutout Width
ERD36	36" (914mm)	42" (1067mm)	36 1/16" (916mm)
ERDE36			
ERD48	48" (1219mm)	54" (1372mm)	48 1/8" (1222mm)
ERDE48			