

30" GAS COOKTOP



MODEL CODE

400 SERIES

F4MGK30S1



Heavy-Duty Grates



Continuous Grate Surface



Dual-Flame Burner



Automatic Reignition System



Brass Burners



Americans with Disabilities Act †

DESCRIPTION

The Matteo 400 series 30" gas cooktop combines classic contemporary style with exceptional functionality, fitting seamlessly into any kitchen aesthetic. Featuring high-quality brass burners, this cooktop offers a user-friendly cooking surface enhanced by elegant and durable cast iron grates that are easily removable for effortless cleaning. The continuous cooking surface and flexible burner layout, including automatic re-ignition for added safety, this cooktop is designed to meet the needs of discerning cooks. Whether you're simmering sauces or searing meats, this cooktop delivers performance and reliability, elevating your culinary adventures.

FEATURES

- 5 gas burners with 1 dual-flame burner (center)
- Polished Brass burners
- Automatic re-ignition system
- Heavy-duty continuous cast iron grates
- Elegant brushed stainless steel cook top base
- Convertible to Liquid Propane

INCLUDED ACCESSORIES

- | | |
|-------------|-------------------|
| 41091255 | Installation Kit |
| 49000100544 | LP Conversion Kit |

OPTIONAL ACCESSORIES

- | | |
|-------|--------------|
| FMWOK | Wok Ring |
| FMSIM | Simmer Plate |

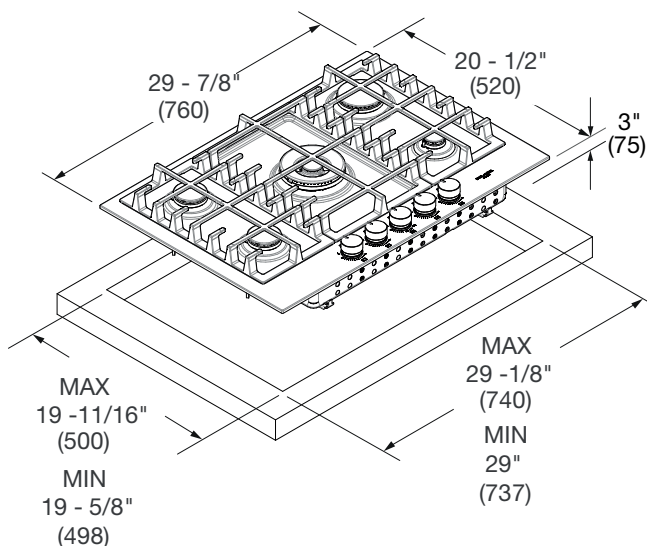
† To achieve full ADA compliance, please consult the current ADA requirements for product installation instructions.

30" GAS COOKTOP



MODEL CODE

400 SERIES

F4MGK30S1


MODEL CODE	30" GAS COOKTOP F4MGK30S1	
GENERAL DETAILS		
Finish	Brushed Stainless Steel	
Control Type	Knobs	
Fuel Type	Gas (NG or LP)	
Heavy-Duty Cast Iron Grates	3	
Cooking Zones	5	
Sealed Burners	Yes	
DIMENSIONS / WEIGHT		
Product Width, in. (mm)	29-7/8	(760)
Product Height, in. (mm)	5-1/4	(132)
Product Depth, in. (mm)	20-1/2	(520)
Cutout Width (min-max), in. (mm)	29 - 29-1/8	(737 - 740)
Cutout Height (min), in. (mm)	3-3/8	(86)
Cutout Depth (min-max), in. (mm)	19-5/8 - 19-11/16	(498 - 500)
Net Weight, lbs. (kg)	35	(16)
POWER / RATINGS (120 V, 60 Hz)		
Power (min-max) (Front-L)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)	
Power (min-max) (Front-R)	1000 BTU/h (295 W) - 4000 BTU/h (1175 W)	
Power (min-max) (Center)	850 BTU/h (250 W) - 20000 BTU/h (5865 W)	
Power (min-max) (Rear-L)	1300 BTU/h (380 W) - 8000 BTU/h (2350 W)	
Power (min-max) (Rear-R)	2200 BTU/h (645 W) - 12000 BTU/h (3520 W)	
TECHNICAL DETAILS		
Amperage Rating	0.1 A	
Maximum Power	52000 BTU/h (15295 W)	
Power Cable	3 Prong Nema 5 - 15P	
Power Cable Length, in. (mm)	51	(1300)
Electrical Circuit	120 V - 60 Hz - 15 A	
LP Kit Included	Yes	
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / French / Spanish	
WARRANTY		
Limited Warranty	Parts and Labor (2-year)	