

# FRIGIDAIRE

affinity.



## Top Load Washer

FAHE4044M W

14 Wash Cycles  
3.4 Cu. Ft. D.O.E.



AjMadison  
Your Appliance Authority  
800-570-3355

### Signature Features




#### Fits-More™ Washer

Our new design lets you wash more in one load.



#### WaterFall™ Wash Technology with Immersion Care™ Action

WaterFall™ Wash Technology thoroughly soaks the entire load while Immersion Care™ Action gently spins water and detergent through clothes for better cleaning.

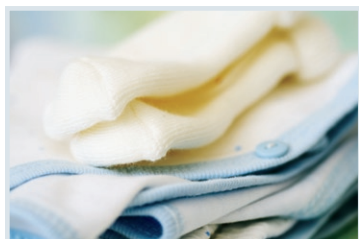

#### Our Cleanest Wash

Our exclusive wash system features WaterFall™ jets that soak your clothes thoroughly, ensuring whiter whites and tough stain removal, for maximum cleaning even with large loads.



#### Fresh Water Rinse

Final rinse uses fresh water to ensure whiter whites and reduce allergens.

### Product Dimensions

Height	43"
Width	27"
Depth	29"

### More Easy To Use Features

#### Vibration Control System

Advanced vibration control keeps even oversized loads balanced for smooth, quiet operation. Ideal for second floor installation.

#### Quick Wash

Quickly wash a small, lightly soiled load.

#### Specialty Cycles

Features specific cycles to wash jeans or kids' wear.

#### Whiter Whites

Our wash system gives you whiter whites and more vibrant colors.

#### Energy Saver Option

When option is selected energy is reduced.

#### SilentDesign™

Designed for 20% quieter operation.

#### Express-Select® Controls

Easily select options with the touch of a button.

### Bright Interior Light



ENERGY STAR®


Available in:



Classic White (W)

Features	
Washer Type	HE Top Load
Total Capacity D.O.E. (Cu.Ft.)	3.4
Controls	Express-Select®
Washer Drum Interior	Polypropylene
Interior Light	Yes
Vibration Control System	Yes
Framed Glass Window Lid	Yes
Suspension System	Sure-Spin™
Wash System	Immersion Care™ Action
TimeWise® Technology	Yes
Fresh Water Rinse	Yes
Waterfall™ Wash	Yes
Estimated Time Remaining	Yes
Bleach Dispenser	Yes
Fabric Softener Dispenser	Yes
Cycle Status Lights	Yes
Cycle Signal	Yes
Cycle Signal "On/Off"	Yes
Control Lock	Yes
Start/Pause/Cancel Knobs	Yes
Delay Start	Up to 12 Hours
Agitate Speed (Stroke/Min.)	Variable
Spin Speed (Maximum RPM)	800
Sound Package	SilentDesign™
Adjustable Leveling Legs	4
Cycles	
Wash Cycles	14
Specialty Cycles	2
Options	
Water Temperature Selections	5
Water Levels	Automatic with 4 manual levels
Spin Speed Selections	5
Soil Level Selections	5
Energy Saver Option	Yes
Optional Accessories	
Mobile Home Installation Kit	PN# 137067200
Drain Hose Extension Kit	PN# 137098000
Certifications	
ENERGY STAR®	Yes
Specifications	
Power Supply Connection Location	Left Top Rear
Water Inlet Connection Location	Left Rear
Voltage Rating	120V / 60Hz / 15A
Connected Load (kW Rating) @ 120 Volts¹	0.295
Watts @ 120 Volts/ Amps @ 120 Volts	295 / 4.0
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	183 Lbs.

¹For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

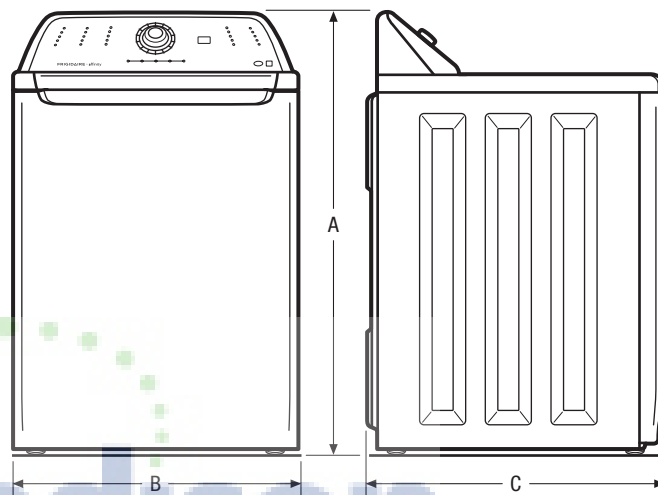


**Madison**  
Your Appliance Authority™  
800-570-3355

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).



Product Dimensions	
A - Height	43"
B - Width	27"
C - Depth	29"

Accessories information available on the web at [frigidaire.com](http://frigidaire.com)

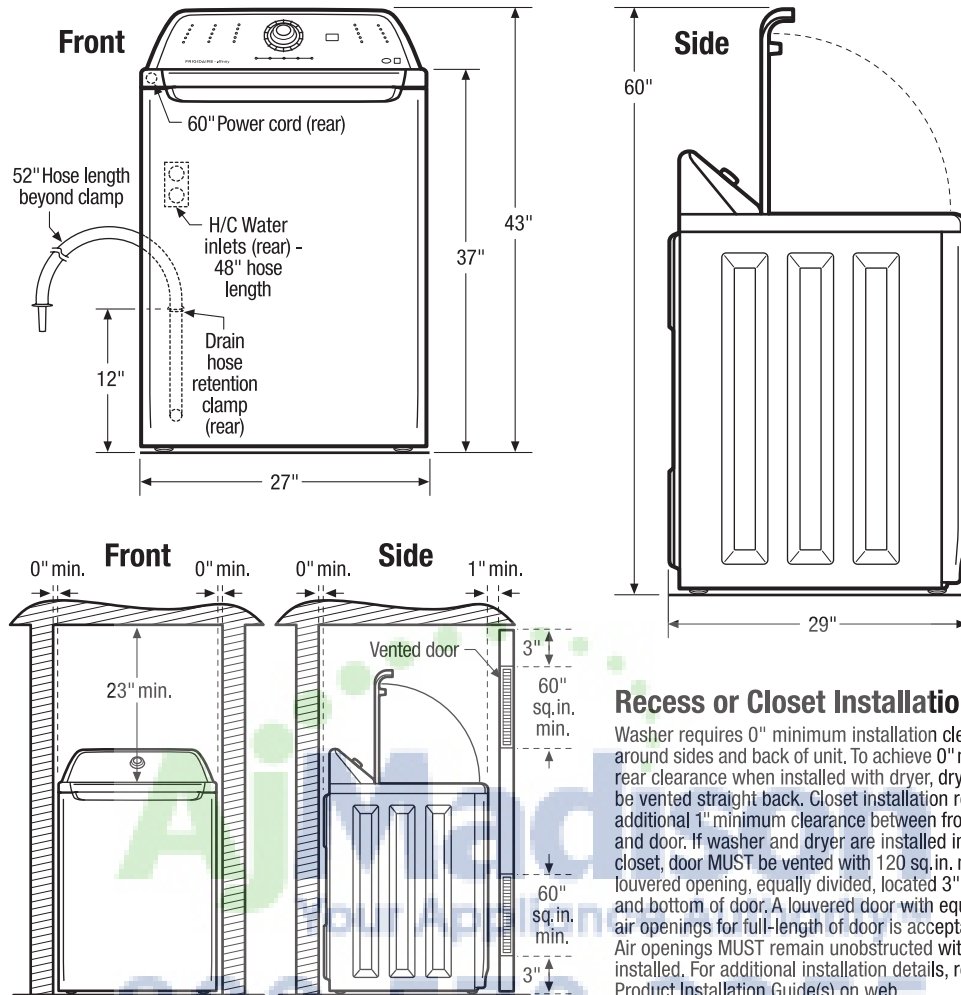

### Recess or Closet Installation

Washer requires 0" minimum installation clearance around sides and back of unit. To achieve 0" minimum rear clearance when installed with dryer, dryer **MUST** be vented straight back. Closet installation requires additional 1" minimum clearance between front of unit and door. If washer and dryer are installed in same closet, door **MUST** be vented with 120 sq. in. minimum louvered opening, equally divided, located 3" from top and bottom of door. A louvered door with equivalent air openings for full-length of door is acceptable. Air openings **MUST** remain unobstructed with door installed. For additional installation details, refer to Product Installation Guide(s) on web.

### Top Load Washer Specifications

- Product Shipping Weight (approx.) - 183 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (ANSI/NFPA 70) and local codes & ordinances. (*Do not use same circuit as dryer.*)
- Voltage Rating - 120V/60 Hz/15 Amps
- Amps @ 120 Volts = 4.0 Amps
- Equipped with 120V 3-wire power supply cord, approx. 60" long.
- Always consult local and national electric & plumbing codes.
- To maximize detergent effectiveness, ambient temperature should never be below 60° F.
- Washer can be installed in recess or closet requiring 0" minimum installation clearance around sides and back of unit. To achieve 0" minimum rear clearance when installed with dryer, dryer **MUST** be vented straight back. Closet installation requires additional 1" minimum clearance between front of unit and door. If washer and dryer are installed in same closet, door **MUST** be vented with 120 sq. in. minimum louvered opening, equally divided, located 3" from top and bottom of door. A louvered door with equivalent air openings for full-length of door is acceptable. Air openings **MUST** remain unobstructed with door installed. (*For additional installation details, refer to Product Installation Guide on web.*)
- Do NOT install in area exposed to dripping water or outdoor weather conditions; or where gasoline or other flammables, including automobiles, are kept or stored.
- Floor **MUST** be solid with 1" maximum slope. To minimize vibration or movement, reinforcement of floor may be necessary. Do NOT install on carpeted surface.
- Leveling legs supplied to level unit properly and reduce excessive noise and vibration.
- H/C water faucets **MUST** be installed within 42" of washer's water inlet and **MUST** be 3/4" with threading for laundry hose connection to connect to 48" inlet hoses.
- Water pressure **MUST** be between 30 and 120 psi with NOT more than 10 psi pressure difference between hot and cold.
- Drain standpipe requires diameter of 1-1/4" min. and height of 33" min./96" max. above floor, capable of eliminating 17 gallons per minute. Attached 52" drain hose can reach 74"-high standpipe. For higher standpipe, optional Drain Hose Extension Kit available.
- For manufactured or mobile home installation optional Mobile Home Installation Kit (PN# 137067200) required. (*For specific installation details, refer to Product Installation Guide on web.*)

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.com](http://frigidaire.com) for detailed instructions.

### Optional Accessories

- Mobile Home Installation Kit - (PN# 137067200).
- Drain Hose Extension Kit - (PN# 137098000).

### FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • [frigidaire.com](http://frigidaire.com)  
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](http://frigidaire.ca)

FAHE4044M 06/12

© 2012 Electrolux Home Products, Inc.



Specifications  
subject to change.