

## DISHWASHER

### FDW100 – 24" WIDE DISHWASHER

### FDW100WS – 24" WIDE DISHWASHER WITH WATER SOFTENER



#### Multi-Level Washing

- Multi-level washing with three spray arms ensures clean dishes
- Turbidity sensor monitors the soil level of the dishes
- Triple filtration system removes the smallest particles for clean water circulation
- Flow-through water heater is concealed to provide a safer alternative to exposed heaters

#### Condensate Quick Dry

- Moisture condensates on the cooler stainless steel tank and door and drains to the sump area
- Quick and efficient drying

#### Quiet Clean™ Performance Package – 50 dB

- Three layers of insulation – bitumen, cotton, and full side walls create one of the quietest dishwashers on the market

#### Loading

- Accommodates 12 international place settings
- Two position adjustable upper rack allows for taller glasses in upper rack or larger pans in bottom rack
- Two stemware cradles/cup shelves
- Adjustable tines
- Lower rack – four rows adjustable tines for easy loading of pans
- One-piece silverware/cutlery basket

#### Built-In Water Softener (FDW100WS model)

- Reduces water hardness to a manageable level to prevent glasses and dishes from etching

#### Cycles/Options


- Cycles
  - Pots/Pans Plus
  - Normal Wash
  - Light/China
  - Fast Wash
  - Rinse/Hold
- Options
  - Half Load
  - Tablet Function
  - Delay Start (up to 9.5 hours)
- LCD screen with remaining time indicator
- Energy Star Qualified

#### Finishes

- Available in Custom Panel Model (no front)
- Optional Door Panels (RVDP324) available in Stainless Steel (SS), Black (BK), and White (WH)


#### Warranty Highlights

- Three-year full – complete product
- Ninety-day full – cosmetic parts such as glass, painted items, and decorative items
- Lifetime limited – tank and inner door
- Five-year limited – electronic controls, racks, motor/pump assemblies and water distribution system

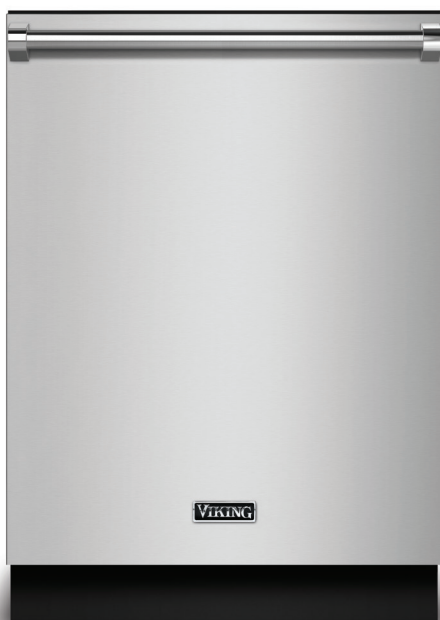

24" Wide Dishwasher

DESCRIPTION	24" WIDE DISHWASHER
	FDW100/FDW100WS
Overall Width	23 9/16" (59.8 cm)
Overall Height from Floor	33 7/8" (86.0 cm) minimum to 35 7/8" (91.1 cm) maximum
Overall Depth from rear Without Door Panel With Door Panel	21 5/8" (54.9 cm) 22 3/16" (56.4 cm)
Cutout Width	24" (61.0 cm)
Cutout Height	34" (86.4 cm) minimum to 36" (91.4 cm) maximum
Cutout Depth	24" (61.0 cm)
Electrical Requirements	12.0 amps, 115V60Hz; 4' (120 cm) electrical cord supplied with unit
Water Heating Element Rating	1,240 watts
Inlet Water Temperature	120°F (49°C) required
Drain Hose	6.4' (1.9m) drain hose provided
Drain Hose High Loop Required	Height from floor – 28" (71.0 cm)
Approximate Shipping Weight	97 lbs. (44kg)

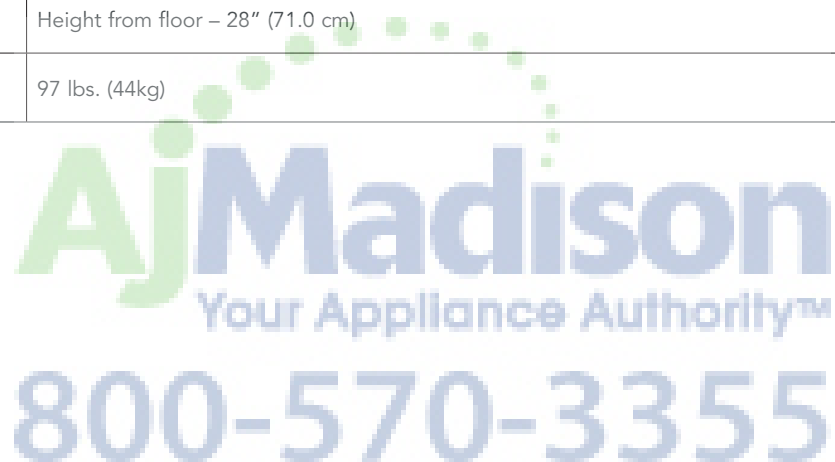

Viking Range, LLC | 1-888-845-4641 or 662-455-1200

For detailed product information, model numbers, or to request a quote visit [vikingrange.com](http://vikingrange.com)

© 2013 Viking Range, LLC | Specifications subject to change without notice.

