FRIGIDAIRE.

FFEW2726T S/W/B



AVAILABLE







SIGNATURE FEATURES

Built with American Pride

Designed, engineered and assembled in the U.S.A.

Even Baking Technology

Our Even Baking Technology ensures even baking every time.

Oven Rack Handles

Oven racks are designed with space for you to easily pull out the racks, even when wearing an oven mitt.

Ready-Select® Controls

Easily select options or control cooking temperature with our easy-to-use controls.

SINGLE WALL OVEN

27" ELECTRIC

PRODUCT DIMENSIONS

Height	29"
Width	27"
Depth	24-3/4"

MORE EASY-TO-USE FEATURES

Attractive Stainless Steel Exterior¹

Self-Cleaning

Your oven cleans itself — so you don't have to. Self clean options available in 2-, 3- and 4-hour cycles.

CERTIFICATIONS

A.D.A. - Compliant

ADA When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

Star-K® Certified (Sabbath Mode)

Select models only



FEATURES


LATORES	
Oven Control/Timing System	Ready-Select®
Window	Large
Exterior Door Finish	Stainless Steel (S), Color-Coordinated (W/B)
Handle Design	Stainless Steel (S), Color-Coordinated (W/B)
Oven Cleaning System	Self-Clean
OVEN CONTROLS	
Bake/Broil	Yes/Variable (400 - 550°F)
Convection Conversion	
Convection Bake/Broil/Roast	
Quick Bake Convection	
Quick Preheat	
My Favorite	
Slow Cook	
Effortless™ Temperature Probe	
Keep Warm	Yes
Add-a-Minute	
Delay Start	Yes
Self-Clean/Clean Options	Yes/2, 3, 4 Hours
Steam Clean	
Delay Clean	Yes
Kitchen Timer	Yes
Timed Cook Option	Yes
Control Lock	Yes
Auto Oven Shut-Off	
Oven Lock-Out	Yes
OVEN FEATURES	
Capacity (Cu.Ft.)	3.8
Convection System	
Oven Light	1 Halogen
Hidden Bake Element	Yes
Rack Configuration	2 Handle Racks
Baking System	Even Baking Technology
Broiling System	Vari-Broil™
Bake/Broil Element (Watts)	1,450/3,400
OPTIONAL ACCESSORIES	, , . ,
3"-High Bottom Trim-	(S) PN# 318903509
Stainless Steel (S)/White (W)/ Black (B)	(W) PN# 318903506 (B) PN# 318903507
10'-Long Armored Power Cable	PN# 903056-9010
CERTIFICATIONS	
A.D.A. Compliant ¹	Yes
Sabbath Mode (Star-K® Certified)	Yes
SPECIFICATIONS	
Oven Interior (H x W x D)	17"×20-1/2"×18-3/4"
Power Supply Connection Location	Left Bottom Rear
Voltage Rating	240V/208V/60Hz
Connected Load (kW Rating) @ 240/208 Volts ²	3.7/2.8
Amps @ 240/208 Volts	15.4/13.5
Minimum Circuit Required (Amps)	20
Approved for Under-Counter	Yes
Shipping Weight (Approx.)	130 Lbs.
'When properly installed, this model is A.D.Aqui	

When properly installed, this model is A.D.Aqualified based on the United States
Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010
A.D.A. Standards for Accessible Design.
3Cinale about 7 and coins arbit 120 (240 and 120 (200 Val) CO Ularta AC and calculation


²Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

PRODUCT DIMENSIONS

29"	
27"	
24-3/4"	
27-1/4"	
24-5/8"	
44-3/4"	
27-1/4"	
27-1/4" 28-1/4"	
28-1/4"	
	27" 24-3/4" 27-1/4" 24-5/8"





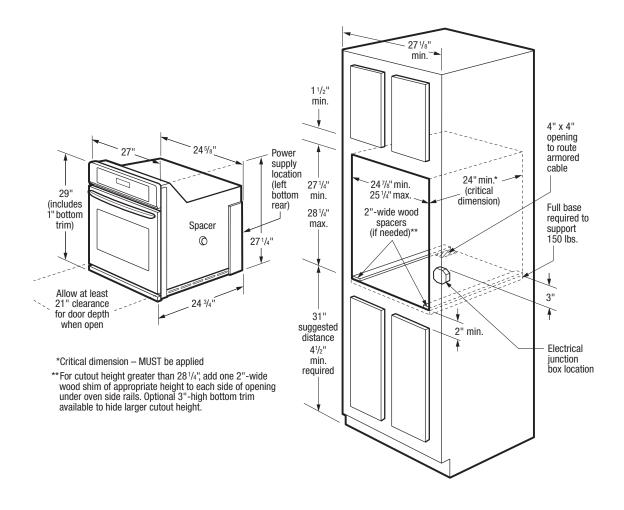

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) 130 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.
- Connected Load (kW Rating) @ 240/208 Volts = 3.7/2.8kW
- Amps @ 240/208 Volts = 15.4/13.5 Amps
- Recommended Circuit Breaker 20 Amps
- · Always consult local and national electric codes.
- Minimum 21" clearance for oven door depth when open.
- Suggested distance from floor is 31". Minimum required distance is 4-1/2".
- Minimum 24" deep cutout dimension is critical for proper installation, to ensure that oven's faceplate will fit flush against cabinet front.
- For cutout height greater than 28-1/4", add one 2"-wide wood shim of appropriate height to each side of opening under oven side rails. Optional 3"-high bottom trim available to hide larger cutout height.
- Full oven base of solid plywood or similar material required, capable of supporting 150 Lbs.
- · Base must be level and cabinet front must be square.

- Single Wall Oven is NOT approved to be used in stackable or side-byside installation.
- Single Wall Oven is approved to be used alone in under-counter installation or beneath any approved Frigidaire® gas or electric cooktop. (Refer to Gas or Electric Cooktop Installation Over 30"/27" Electric Single Wall Oven Specifications pages on web.)
- Single Wall Oven is approved to be used in combination with any Frigidaire® Warmer Drawer. (Refer to model-specific Warmer Drawer product page for Combination Installation Specifications.)
- · Single Wall Oven is approved to be used in combination with any Frigidaire® Built-In Microwave Oven.

OPTIONAL ACCESSORIES

- 3"-High Stainless Steel Bottom Trim (PN# 318903509).
- 3"-High White Bottom Trim (PN# 318903506).
- 3"-High Black Bottom Trim (PN# 318903507).
- 10'-Long Armored Power Cable (PN# 903056-9010).



Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com. Specifications subject to change. Accessories information available on the web at frigidaire.com